

**NOBLE ENERGY INC.**  
 Federal 14  
 NWNE 8-2N-63W  
 990 FNL & 1650 FEL  
 WELD COUNTY, CO  
 Wattenberg  
**CURRENT WELLBORE SCHEMATIC**  
 with PROPOSED P&A  
 10/8/2015

API: 05-123-07634


KB Elev: 4803'  
 GL Elev: 4790'

Spud Date: 1/13/1973

**Surface Casing :**  
 8 5/8", 24# @ 618'  
 Cement: 400 sx  
 TOC: Surface

TOC @ 6356'

**Production Casing :**  
 4 1/2", 11.6#, K-55 @ 7363'  
 Cement: 154 sx  
 Run Date: 1/20/1973

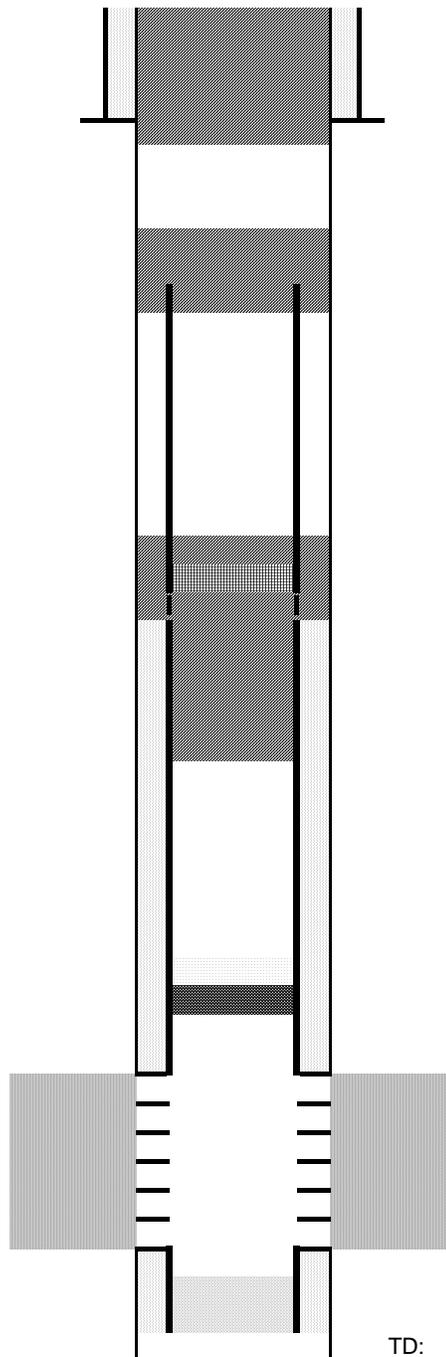

Cut surface casing off 6'-8' below surface.

Pump approx 275 sx shoe plug at 769'

Pump 100 sx stub plug where csg was pulled  
 Cut and pull casing @ 2500'

Pump 55 sx through and 5 sx on top to cover top of Nio  
 Set CICR @ 6245'  
 Perforate 4 1/2" casing @ 6335'

Pump 8 sx balance plug @ 6470' to cover top of Nio

CIBP @ 7176' w/ 2 sx cement on top

J Sand Perforations: 7226' - 7287'

TD: 7370'