


Schneider Energy Services Inc

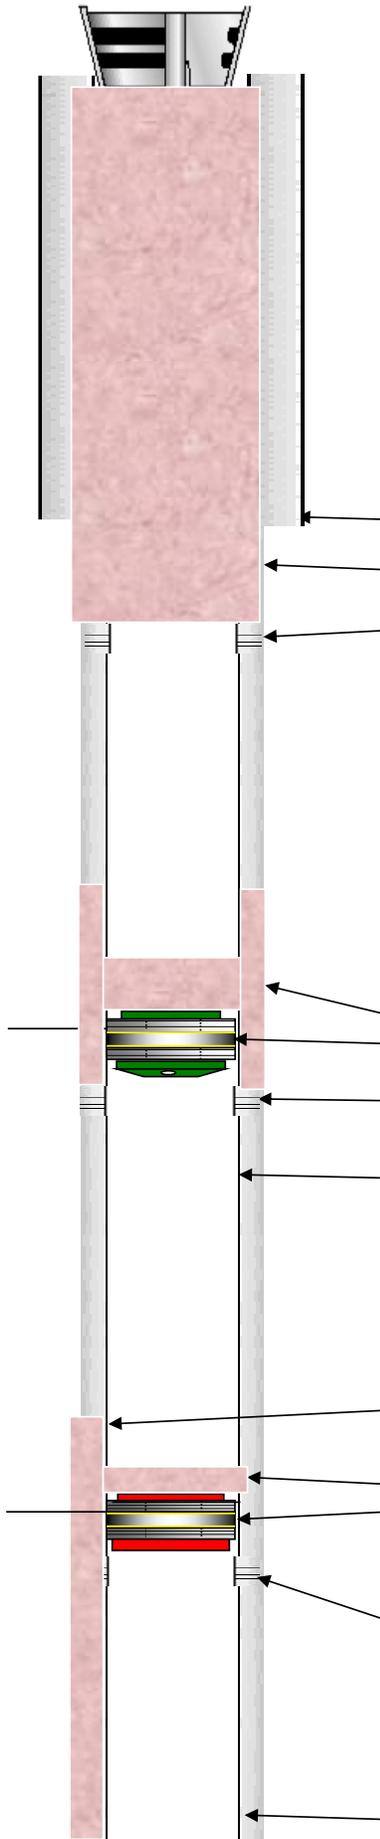

COMPANY					DATE	
Schneider Energy Services, Inc					2/4/16	
LEASE						
Miur 13-A						
CASING	Size	Weight	Grade	Thread	Depth	
	8-5/8"	24	J-55	LT&C	221	
Casing	Size	Weight	Grade	Thread	Depth	
	4-1/2"	10.5	J-55	LT&C	6440	
Tubing	First String	Size	Weight	Grade	Thread	Depth
	Second String	Size	Weight	Grade	Thread	Depth
Prepared for: COGCC PROPOSED WBD.			Perforations: D-Sand 6410' to 6416'.			
ITEM No#	Length	Description		ID	OD	Depth
1	221.00	8-5/8", 23# Surface casing landed @ 221'.				
2		100 sacks of cement				
3		Squeeze holes @ 271'				
		40 sacks of cement				
		Cast Iron Cement Retainer @ 5610'				
		Squeeze holes @ 5640'				
		Top of the Niobrara 5680'.				
4		Top of cement @ 6156'				
5		2 Sacks of Cement				
6		CIBP set @ 6375'				
7		D-Sand Perfs 6410' to 6416'				
8	6440.00	4-1/2", 10.5# casing set @ 6440'.				-6440.00
PREPARED BY: Jeff Schneider				PHONE:		
				970-381-9588		
OFFICE		PHONE		INVOICE #		