



**LEASE INFORMATION**

Using standard QtrQtr, Sec, Twp, Rng format, describe one entire mineral lease that will be produced by this well (Describe lease beneath surface location if produced. Attach separate description page or map if necessary.)

Sec. 10: W/2 and Part of NE and Part of SE T1N-R64W

Total Acres in Described Lease: 426 Described Mineral Lease is:  Fee  State  Federal  Indian

Federal or State Lease # \_\_\_\_\_

Distance from Completed Portion of Wellbore to Nearest Lease Line of described lease: 0 Feet

**CULTURAL DISTANCE INFORMATION**

Distance to nearest:

- Building: 2126 Feet
- Building Unit: 2126 Feet
- High Occupancy Building Unit: 5280 Feet
- Designated Outside Activity Area: 5280 Feet
- Public Road: 233 Feet
- Above Ground Utility: 210 Feet
- Railroad: 5280 Feet
- Property Line: 208 Feet

**INSTRUCTIONS:**

- All measurements shall be provided from center of the Proposed Well to nearest of each cultural feature as described in Rule 303.a.(5).
- Enter 5280 for distance greater than 1 mile.
- Building - nearest building of any type. If nearest Building is a Building Unit, enter same distance for both.
- Building Unit, High Occupancy Building Unit, and Designated Outside Activity Area - as defined in 100-Series Rules.

**DESIGNATED SETBACK LOCATION INFORMATION**

- Check all that apply. This location is within a:
- Buffer Zone
  - Exception Zone
  - Urban Mitigation Area

- Buffer Zone – as described in Rule 604.a.(2), within 1,000' of a Building Unit
- Exception Zone - as described in Rule 604.a.(1), within 500' of a Building Unit.
- Urban Mitigation Area - as defined in 100-Series Rules.

Pre-application Notifications (required if location is within 1,000 feet of a building unit):

Date of Rule 305.a.(1) Urban Mitigation Area Notification to Local Government: \_\_\_\_\_

Date of Rule 305.a.(2) Buffer Zone Notification to Building Unit Owners: \_\_\_\_\_

**SPACING and UNIT INFORMATION**

Distance from completed portion of proposed wellbore to nearest completed portion of offset wellbore permitted or completed in the same formation: 360 Feet

Distance from Completed Portion of Wellbore to Nearest Unit Boundary 460 Feet (Enter 5280 for distance greater than 1 mile.)

Federal or State Unit Name (if appl): \_\_\_\_\_ Unit Number: \_\_\_\_\_

**SPACING & FORMATIONS COMMENTS**

Township 1 North, Range 64 West, 6th P.M. Section 10: W½ Section 15: W½; Pending spacing order number; on docket for June 2017

**OBJECTIVE FORMATIONS**

Objective Formation(s)	Formation Code	Spacing Order Number(s)	Unit Acreage Assigned to Well	Unit Configuration (N/2, SE/4, etc.)
NIOBRARA	NBRR			

## DRILLING PROGRAM

Proposed Total Measured Depth: 17133 Feet

Distance from the proposed wellbore to nearest existing or proposed wellbore belonging to another operator, including plugged wells:

Enter distance if less than or equal to 1,500 feet: 151 Feet  No well belonging to another operator within 1,500 feet

Will a closed-loop drilling system be used? Yes

Is H<sub>2</sub>S gas reasonably expected to be encountered during drilling operations at concentrations greater than or equal to 100 ppm? No (If Yes, attach an H<sub>2</sub>S Drilling Operations Plan)

Will salt sections be encountered during drilling? No

Will salt based (>15,000 ppm Cl) drilling fluids be used? No

Will oil based drilling fluids be used? Yes

BOP Equipment Type:  Annular Preventor  Double Ram  Rotating Head  None

## GROUNDWATER BASELINE SAMPLING AND MONITORING AND WATER WELL SAMPLING

Water well sampling required per Rule 318A

## DRILLING WASTE MANAGEMENT PROGRAM

Drilling Fluids Disposal: OFFSITE Drilling Fluids Disposal Methods: Commercial Disposal

Cuttings Disposal: OFFSITE Cuttings Disposal Method: Commercial Disposal

Other Disposal Description:

Beneficial reuse or land application plan submitted? \_\_\_\_\_

Reuse Facility ID: \_\_\_\_\_ or Document Number: \_\_\_\_\_

## CASING PROGRAM

Casing Type	Size of Hole	Size of Casing	Wt/Ft	Csg/Liner Top	Setting Depth	Sacks Cmt	Cmt Btm	Cmt Top
CONDUCTOR	24	16	65	0	80	70	80	0
SURF	13+1/2	9+5/8	36	0	1700	462	1700	0
1ST	8+1/2	5+1/2	20	0	17133	2152	17133	0

Conductor Casing is NOT planned

## DESIGNATED SETBACK LOCATION EXCEPTIONS

Check all that apply:

- Rule 604.a.(1)A. Exception Zone (within 500' of Building Unit)
- Rule 604.b.(1)A. Exception Location (existing or approved Oil & Gas Location now within a Designated Setback as a result of Rule 604.a.)
- Rule 604.b.(1)B. Exception Location (existing or approved Oil & Gas Location is within a Designated Setback due to Building Unit construction after Location approval)
- Rule 604.b.(2) Exception Location (SUA or site-specific development plan executed on or before August 1, 2013)
- Rule 604.b.(3) Exception Location (Building Units constructed after August 1, 2013 within setback per an SUA or site-specific development plan)

## GREATER WATTENBERG AREA LOCATION EXCEPTIONS

Check all that apply:

- Rule 318A.a. Exception Location (GWA Windows).
- Rule 318A.c. Exception Location (GWA Twinning).

## RULE 502.b VARIANCE REQUEST

Rule 502.b. Variance Request from COGCC Rule or Spacing Order Number \_\_\_\_\_

## OTHER LOCATION EXCEPTIONS

Check all that apply:

Rule 318.c. Exception Location from Rule or Spacing Order Number \_\_\_\_\_

Rule 603.a.(2) Exception Location (Property Line Setback).

ALL exceptions and variances require attached Request Letter(s). Refer to applicable rule for additional required attachments (e.g. waivers, certifications, SUAs).

## OPERATOR COMMENTS AND SUBMITTAL

Comments Surface Use Agreement has waivers for Rules 305, 306, 318A.a, 318A.c and 603.a.(2). Please see SUA attached.

The nearest existing non-op well is the Brnak 10-5L4 which is +/- 151 feet as measured from COGCC GIS data. This well is AL and does not require a 317.s stimulation setback consent.

This application is in a Comprehensive Drilling Plan No CDP #: \_\_\_\_\_

Location ID: 439116

Is this application being submitted with an Oil and Gas Location Assessment application? Yes

I hereby certify all statements made in this form are, to the best of my knowledge, true, correct, and complete.

Signed: \_\_\_\_\_ Print Name: Kenny Trueax

Title: Regulatory Manager Date: \_\_\_\_\_ Email: Regulatory@verdadoil.com

Based on the information provided herein, this Application for Permit-to-Drill complies with COGCC Rules and applicable orders and is hereby approved.

COGCC Approved: \_\_\_\_\_ Director of COGCC Date: \_\_\_\_\_

Expiration Date: \_\_\_\_\_

API NUMBER

05

## Conditions Of Approval

All representations, stipulations and conditions of approval stated in the Form 2A for this location shall constitute representations, stipulations and conditions of approval for this Form 2 Permit-to-Drill and are enforceable to the same extent as all other representations, stipulations and conditions of approval stated in this Permit-to-Drill.

**COA Type** **Description**

COA Type	Description

### Best Management Practices

No	BMP/COA Type	Description
1	General Housekeeping	Cleanup of trash, scrap, and discarded materials will be conducted at the end of each workday.
2	General Housekeeping	Mud control: when conditions exist that roads are excessively muddy, additional fill material will be added in order to dehydrate the environment and reduce the amount of material that is transported from the wells roads and location to off-site areas.
3	Material Handling and Spill Prevention	Drip pans will be used during fueling of equipment to contain spills and leaks. Visual inspections of pipe and connections will be performed frequently to detect leaks which will be immediately corrected, repaired and reported to COGCC as required. Spill prevention Control Countermeasure (SPCC) will be in place to address any possible spill associated with oil and gas operations.

4	Material Handling and Spill Prevention	During drilling operations, we anticipate 4-5 loads, @ 20 yards per load, of cuttings per day will be transported off-site to an approved disposal facility in accordance with Operator's waste management plan. All loads leaving the location will have a manifest and will be documented. Water-based and Oil-based cuttings will be disposed of offsite and at a licensed, commercial disposal site.
5	Dust control	When conditions exist that dust is a nuisance to the public, water trucks will be utilized to spread water across the dust problem areas.
6	Noise mitigation	Operator will consult with owners of residents and occupied structures and other stakeholders to reduce impact of noise and light during drilling and completion operations. The direction of prevailing winds is considered when planning the location in order to mitigate odor and noise from being a nuisance to the surrounding residents and occupied structures. In order to minimize sound levels during drilling operations at nearby residences, rig generators will be located as far as possible from the residence by rig orientation. Rig lighting will also be directed away from residential units.
7	Noise mitigation	As necessary, temporary straw bale walls or sound walls will be constructed to dampen noise in the direction of residential units.
8	Odor mitigation	Hydrocarbon odors from production facilities are minimized and eliminated by keeping produced fluid hydrocarbons and natural gas contained within pipes, separators, tanks, and combustors. All tanks will be sealed with thief hatches and gaskets. Tank vapors are captured with properly sized piping and combustors.
9	Drilling/Completion Operations	Operator will use a closed loop system for drilling and fluid management. No pits will be dug.
10	Drilling/Completion Operations	Operator will perform anti-collision evaluation of all active (producing, shut-in, or temporarily abandoned) offset wellbores that have the potential of being within 150' feet of the proposed well prior to drilling operations. Notice shall be given to all offset operators prior to drilling.
11	Drilling/Completion Operations	Rule 604.c.I: Upon initial rig-up and at least once every thirty (30) days during drilling operations thereafter, pressure testing of the casing string and each component of the blowout prevention equipment including flange connections shall be performed to seventy percent (70%) of working pressure or seventy percent (70%) of the internal yield of casing, whichever is less. Pressure testing shall be conducted and the documented results shall be retained by the operator for inspection by the Director for a period of one (1) year. Activation of the pipe rams for function testing shall be conducted on a daily basis when practicable.
12	Drilling/Completion Operations	Operator will comply with COGCC policy on bradenhead monitoring during Hydraulic Fracturing Treatment in the Greater Wattenberg Area per policy dated May 29, 2012.
13	Drilling/Completion Operations	Verdad plans to use a Modular Large Volume Tank (MLVT). The planned tank is a 36K BBL tank approximately 148' in diameter. The MLVT is manufactured by Big Holdings and will be supplied and set up by a third-party vendor. Verdad will follow the COGCC guidance policy dated June 13, 2014 on the use of MLVTs.
14	Drilling/Completion Operations	One of the first wells drilled on the pad will be logged with cased hole Pulsed Neutron Log with Gamma Ray Log from KOP into the surface casing. All wells on the pad will have a cement bond log with gamma-ray run on production casing (or on intermediate casing if production liner is run) into the surface casing. The horizontal portion of every well will be logged with a measured while-drilling gamma-ray log. The Form 5, Completion Report, for each well on the pad will list all logs run in that well and have those logs attached. The Form 5 for each well shall clearly state "No open-hole logs were run" and shall reference the Rule 317.p Exception granted for the well.
15	Final Reclamation	P&A'd wells will be identified and marked pursuant to 319.a.(5). Within 90-day subsequent to the time of plugging and abandonment of the entire site, superfluous debris and equipment shall be removed from the site.

Total: 15 comment(s)

### **Attachment Check List**


<b>Att Doc Num</b>	<b>Name</b>
401252294	WELL LOCATION PLAT
401252297	SURFACE AGRMT/SURETY
401256090	EXCEPTION LOC REQUEST
401260944	OffsetWellEvaluations Data
401261284	DIRECTIONAL DATA
401261286	PROPOSED SPACING UNIT
401261287	DEVIATED DRILLING PLAN
401261289	OPEN HOLE LOGGING EXCEPTION

Total Attach: 8 Files

**General Comments**

<b>User Group</b>	<b>Comment</b>	<b>Comment Date</b>
		Stamp Upon Approval

Total: 0 comment(s)

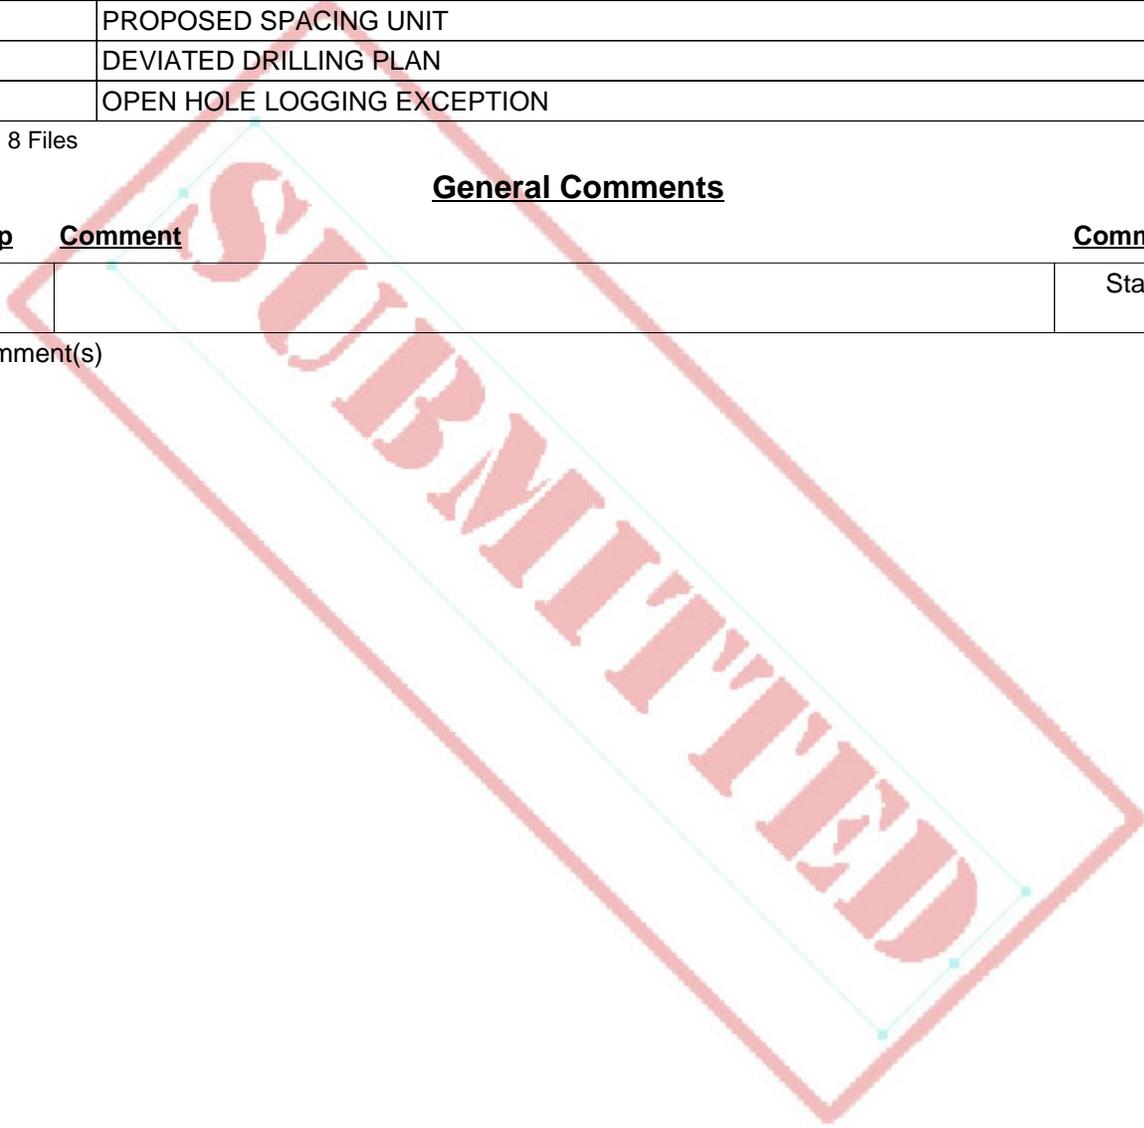

**Public Comments**

No public comments were received on this application during the comment period.

