


Location:	COLORADO	Slot:	SLOT#25 DONN 32C-20-L (978'FNL & 252'FEL, SEC.21)
Field:	WELD COUNTY (NAD83,TRUE NORTH)	Well:	DONN 32C-20-L
Facility:	SEC.21-T06N-R66W	Wellbore:	DONN 32C-20-L PWB

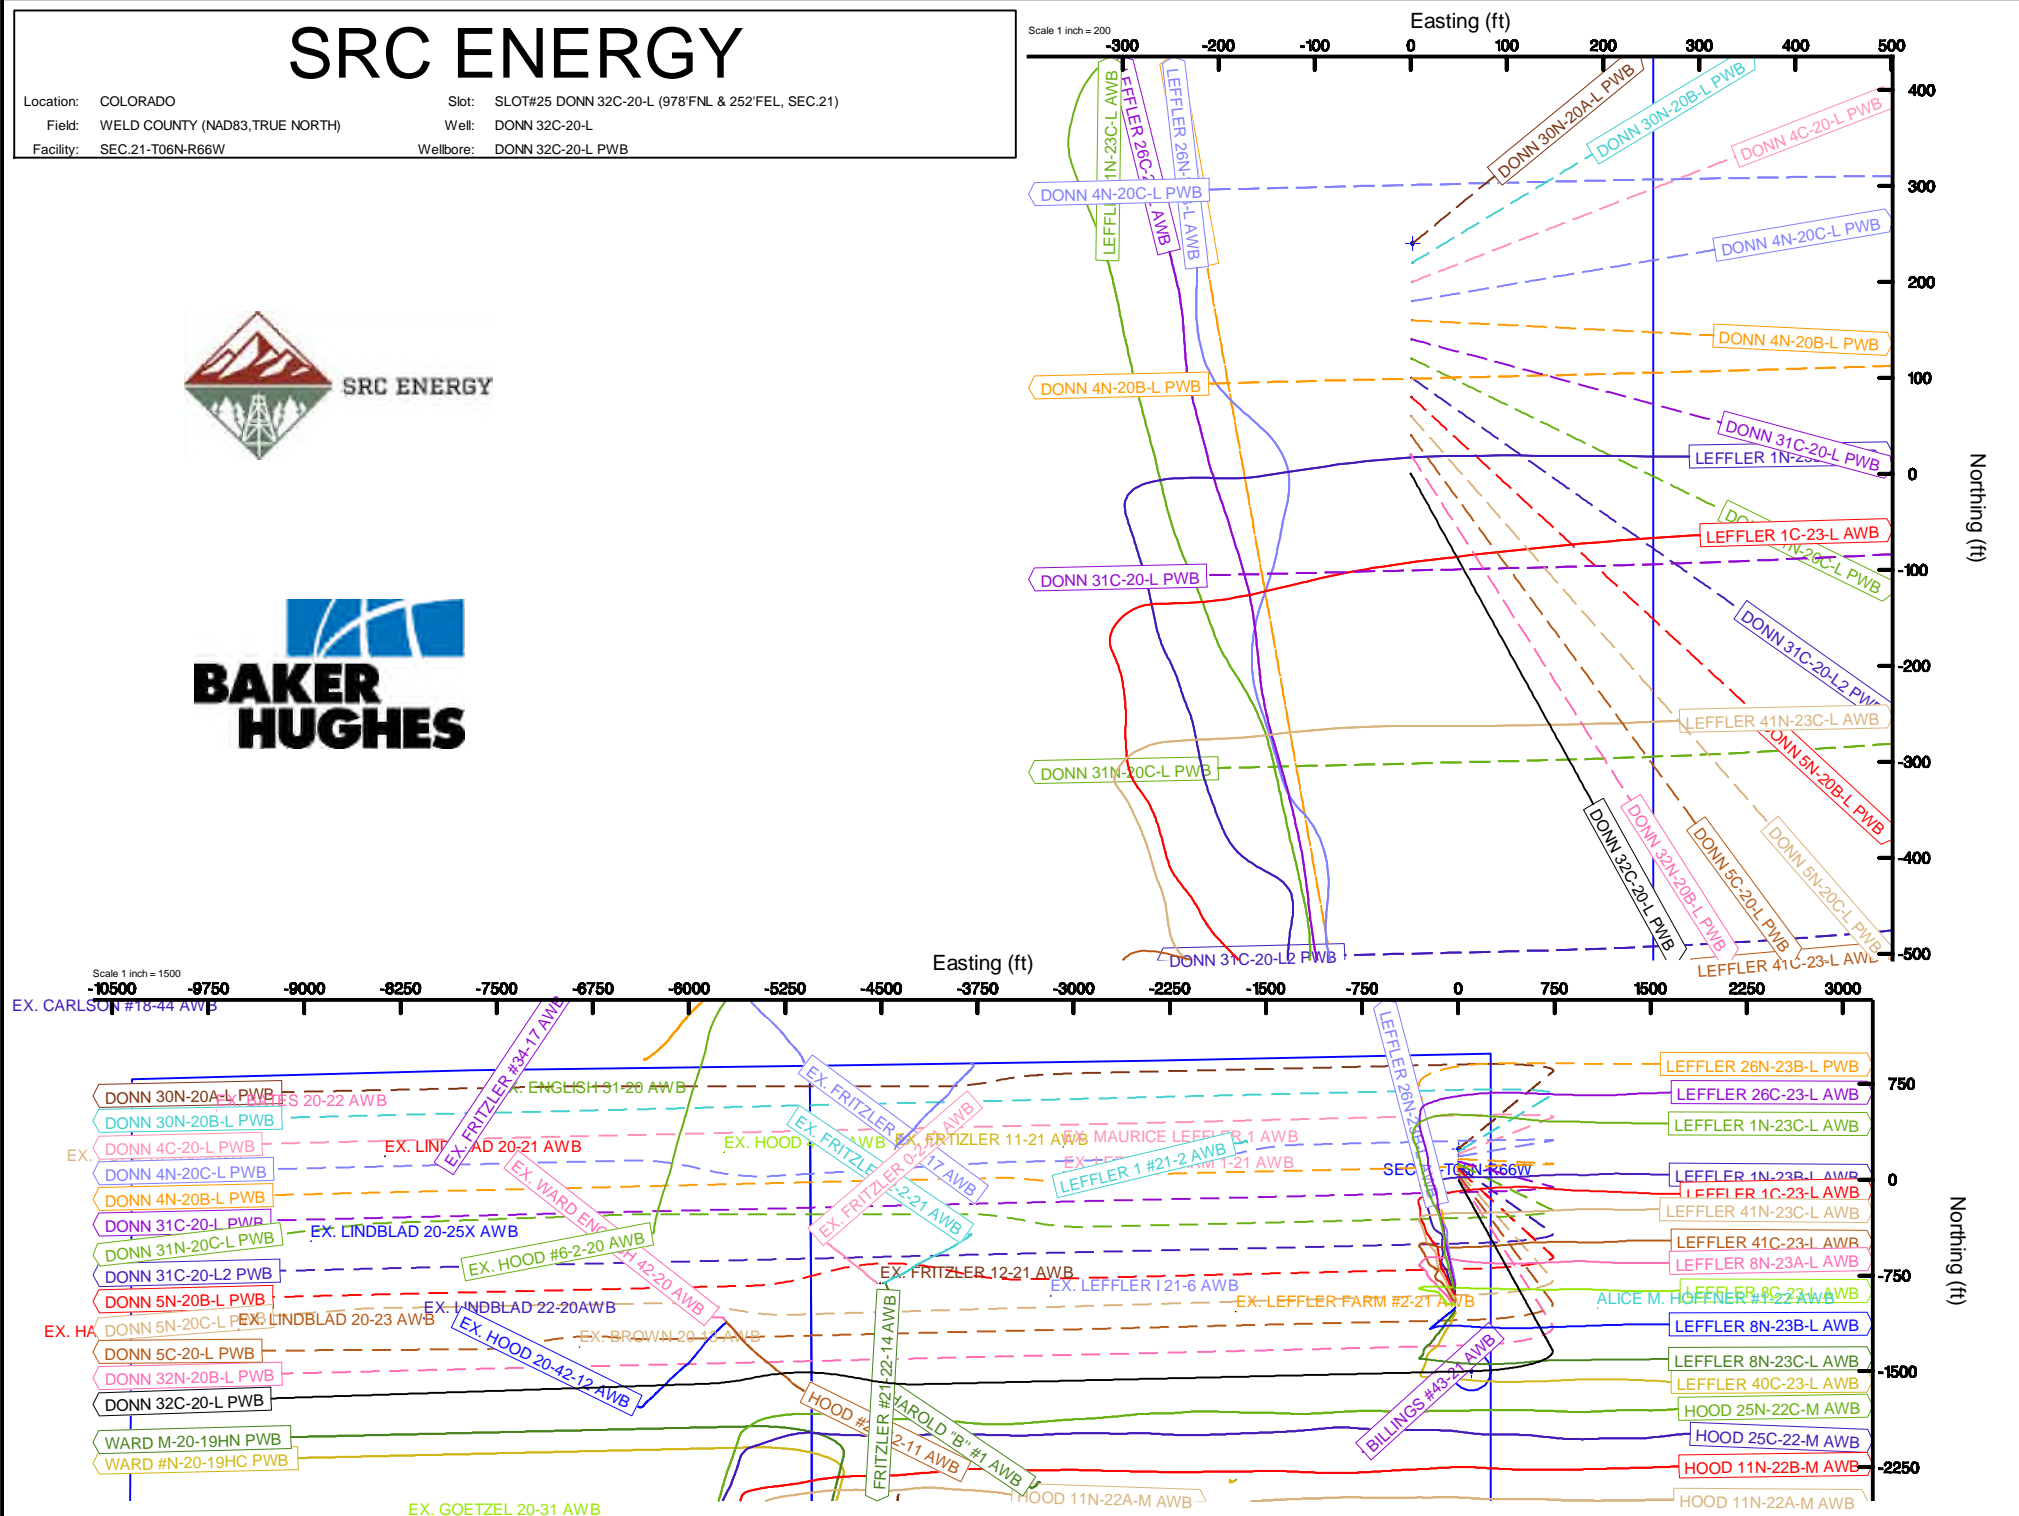

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 1 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

REPORT SETUP INFORMATION

Projection System	NAD83 / Lambert Colorado SP, Northern Zone (501), US feet	Software System	WellArchitect® 5.1
North Reference	True	User	Doddanna
Scale	0.999965	Report Generated	8/25/2017 at 10:00:28 AM
Convergence at slot	0.47° East	Database/Source file	Denver DB/DONN_5C-20-L_PWP_REV-B.0_CR.xml

WELLPATH LOCATION

	Local coordinates		Grid coordinates		Geographic coordinates	
	North[ft]	East[ft]	Easting[US ft]	Northing[US ft]	Latitude	Longitude
Slot Location	863.76	23.65	3201888.18	1418012.16	40°28'42.877"N	104°46'27.354"W
Facility Reference Pt			3201871.60	1417148.27	40°28'34.342"N	104°46'27.660"W
Field Reference Pt			3171284.48	1426358.81	40°30'07.643"N	104°53'02.634"W

WELLPATH DATUM

Calculation method	Minimum Curvature	PRECISION DRILLING (25') (RKB) to Facility Vertical Datum	4776.00ft
Horizontal Reference Pt	Slot	PRECISION DRILLING (25') (RKB) to Mean Sea Level	4776.00ft
Vertical Reference Pt	PRECISION DRILLING (25') (RKB)	PRECISION DRILLING (25') (RKB) to Mud Line at Slot (SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21))	4776.00ft
MD Reference Pt	PRECISION DRILLING (25') (RKB)		
Field Vertical Reference	Mean Sea Level		

POSITIONAL UNCERTAINTY CALCULATION SETTINGS

Ellipse Confidence Limit	3.00 Std Dev	Ellipse Start MD	25.00ft	Surface Position Uncertainty	Included
Declination	8.38° East of TN	Dip Angle	66.90°	Mag Field Strength	52437 nT
Slot Surface Uncertainty @1SD		Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD		Horizontal	8.200ft	Vertical	3.000ft

Positional Uncertainty values in the WELLPATH DATA table are the projection of the ellipsoid of uncertainty onto the vertical and horizontal planes

ANTI-COLLISION RULE

Rule Name	Baker Hughes Stop Drilling (offset is HSE risk)	Rule Based On	Ratio
Plane of Rule	Closest Approach	Threshold Value	1.00
Include Casing & Hole Size	yes	Apply Cone of Safety	no

Clearance Report

DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 2 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

HOLE & CASING SECTIONS - Ref Wellbore: DONN 5C-20-L PWB Ref Wellpath: DONN 5C-20-L PWP (REV-B.0)

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
13.5in Open Hole	25.00	1750.00	1725.00	25.00	1727.35	0.00	0.00	-191.98	140.54
9.625in Casing Surface	25.00	1750.00	1725.00	25.00	1727.35	0.00	0.00	-191.98	140.54
8.5in Open Hole	1750.00	18000.13	16250.13	1727.35	7150.00	-191.98	140.54	-1383.43	-10205.72

SURVEY PROGRAM - Ref Wellbore: DONN 5C-20-L PWB Ref Wellpath: DONN 5C-20-L PWP (REV-B.0)

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
25.00	1750.00	Custom BHI NaviTrak (IFR1, Standard Rotating+Axial Corr) (Rockies 0.03Gt model)		DONN 5C-20-L PWB
1750.00	18000.13	Custom BHI AutoTrak Curve (IFR1, Short) (Rockies 0.03Gt model)		DONN 5C-20-L PWB

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 3 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CALCULATION RANGE & CUTOFF

From: 25.00ft MD	To: 18000.13ft MD	C-C Cutoff: 1000.00 ft
------------------	-------------------	------------------------

OFFSET WELL CLEARANCE SUMMARY (78 Offset Wellpaths selected) Ratios are calculated in Closest Approach plane

Offset Facility	Offset Slot	Offset Well	Offset Wellbore	Offset Wellpath	C-C Clearance Distance			ACR Separation Ratio			
					Ref MD [ft]	Min C-C Clear Dist [ft]	Diverging from MD [ft]	Ref MD of Min Ratio [ft]	Min Ratio	Min Ratio Dvrg from [ft]	ACR Status
SEC 20-T06N-R66W	SLOT#04 EX. BROWN 20-13 (2179'FNL & 1796'FEL, PR, NB/CD)	EX. BROWN 20-13	EX. BROWN 20-13 AWB	EX. BROWN 20-13 AWP	14645.87	80.20	14645.87	14645.13	0.17	14645.13	FAIL
SEC 21-T06N-R66W	SLOT#1 EX. LEFFLER FARM #2-21 (1980'FNL & 1980'FEL, PA-CODL)	EX. LEFFLER FARM #2-21	EX. LEFFLER FARM #2-21 AWB	EX. LEFFLER FARM #2-21 AWP	9517.57	108.40	9517.57	9518.48	0.25	9518.48	FAIL
SEC 21-T06N-R66W	SLOT#22 DONN 5N-20C-L (918'FNL & 252'FEL, SEC.21)	DONN 5N-20C-L	DONN 5N-20C-L PWB	DONN 5N-20C-L PWP (REV-B.0)	25.00	20.04	17997.36	17997.36	0.27	17997.36	FAIL
SEC 20-T06N-R66W	SLOT#05 EX. LINDBLAD 20-23 (1984'FNL & 664'FWL, PR, NB/CD)	EX. LINDBLAD 20-23	EX. LINDBLAD 20-23 AWB	EX. LINDBLAD 20-23 AWP	17309.36	167.27	17309.36	17309.36	0.29	17309.36	FAIL
SEC 21-T06N-R66W	SLOT#25 DONN 32C-20-L (978'FNL & 252'FEL, SEC.21)	DONN 32C-20-L	DONN 32C-20-L PWB	DONN 32C-20-L PWP (REV-B.0)	25.00	40.08	15325.00	18000.13	0.37	18000.13	FAIL
SEC 21-T06N-R66W	SLOT#24 DONN 32N-20B-L (958'FNL & 252'FEL, SEC.21)	DONN 32N-20B-L	DONN 32N-20B-L PWB	DONN 32N-20B-L PWP (REV-A.0)	25.00	20.04	15417.62	18000.13	0.38	18000.13	FAIL
SEC 20-T06N-R66W	SLOT#02 EX. LINDBLAD 22-20 (1915'FNL & 2267'FWL, PR, CODL)	EX. LINDBLAD 22-20	EX. LINDBLAD 22-20AWB	EX. LINDBLAD 22-20AWP	15862.30	243.40	15862.30	15862.30	0.47	15862.30	FAIL
SEC 21-T06N-R66W	SLOT#21 DONN 5N-20B-L (898'FNL & 251'FEL, SEC.21)	DONN 5N-20B-L	DONN 5N-20B-L PWB	DONN 5N-20B-L PWP (REV-B.0)	25.00	40.08	17996.95	17996.95	0.49	17996.95	FAIL
SEC 20-T06N-R66W	SLOT#02 EX. WARD ENGLISH 42-20 (1980'FNL & 660'FEL, PA, CODL)	EX. WARD ENGLISH 42-20	EX. WARD ENGLISH 42-20 AWB	EX. WARD ENGLISH 42-20 AWP	13606.22	165.95	13606.22	13607.39	0.50	13607.39	FAIL
SEC 21-T06N-R66W	SLOT#06 EX. LEFFLER I 21-6 (1880'FNL & 1880'FWL, SI, NB/CD)	EX. LEFFLER I 21-6	EX. LEFFLER I 21-6 AWB	EX. LEFFLER I 21-6 AWP	10959.14	265.81	10959.14	10962.74	0.53	10962.74	FAIL
SEC 21-T06N-R66W	SLOT#20 DONN 31C-20-L2 (878'FNL & 251'FEL, SEC.21)	DONN 31C-20-L2	DONN 31C-20-L2 PWB	DONN 31C-20-L2 PWP (REV-A.0)	25.00	60.11	17996.92	17996.92	0.60	17996.92	FAIL
SEC 21-T06N-R66W	SLOT#03 EX. FRITZLER 12-21 (1707'FNL & 543'FWL, PR NB/CD)	EX. FRITZLER 12-21	EX. FRITZLER 12-21 AWB	EX. FRITZLER 12-21 AWP	12287.50	396.19	12287.50	12296.00	0.71	12296.00	FAIL
SEC 21-T06N-R66W	SLOT#19 DONN 31N-20C-L (858'FNL & 251'FEL, SEC.21)	DONN 31N-20C-L	DONN 31N-20C-L PWB	DONN 31N-20C-L PWP (REV-B.0)	401.02	78.65	18000.08	18000.08	0.82	18000.08	FAIL
SEC 21-T06N-R66W	SLOT#18 DONN 31C-20-L (838'FNL & 251'FEL, SEC.21)	DONN 31C-20-L	DONN 31C-20-L PWB	DONN 31C-20-L PWP (REV-A.0)	25.00	100.19	18000.13	18000.13	1.00	18000.13	FAIL
SEC 20-T06N-R66W	SLOT#03 WARD #M-20-19HN	WARD M-20-19HN	WARD M-20-19HN PWB	WARD M-20-19HN PWP	15382.89	672.53	15382.89	18000.13	1.03	18000.13	PASS
SEC 20-T06N-R66W	SLOT#04 WARD #N-20-19HC	WARD #N-20-19HC	WARD #N-20-19HC PWB	WARD #N-20-19HC PWP	15385.78	816.23	15385.78	18000.13	1.20	18000.13	PASS
SEC 21-T06N-R66W	SLOT#17 DONN 4N-20B-L (818'FNL & 251'FEL, SEC.21)	DONN 4N-20B-L	DONN 4N-20B-L PWB	DONN 4N-20B-L PWP (REV-B.0)	300.00	119.80	18000.13	18000.13	1.22	18000.13	PASS
SEC 20-T06N-R66W	SLOT#01 EX. HOOD #20-42-11 (2015'FNL & 657'FEL SEC.20, PR)	HOOD #20-42-11	HOOD #20-42-11 AWB	HOOD #20-42-11 AWP	12891.12	439.96	12891.12	12903.68	1.39	12903.68	PASS
SEC 20-T06N-R66W	SLOT#04 EX. HOOD 20-42-12 (2000'FNL & 657'FEL, PR, NB/CD)	EX. HOOD 20-42-12	EX. HOOD 20-42-12 AWB	EX. HOOD 20-42-12 AWP	14166.46	524.22	14166.46	14200.07	1.39	14200.07	PASS
SEC 21-T06N-R66W	SLOT#10 LEFFLER 8N-23B-L (1981'FNL & 275'FEL SEC.21)	LEFFLER 8N-23B-L	LEFFLER 8N-23B-L AWB	LEFFLER 8N-23B-L AWP	7251.30	100.38	7251.30	7246.20	1.40	7246.20	PASS
SEC 21-T06N-R66W	SLOT#16 DONN 4N-20C-L (798'FNL & 251'FEL, SEC.21)	DONN 4N-20C-L	DONN 4N-20C-L PWB	DONN 4N-20C-L PWP (REV-B.0)	25.00	139.90	18000.13	18000.13	1.41	18000.13	PASS
SEC 20-T06N-R66W	SLOT#08 EX. LINDBLAD 20-25X (1304'FNL & 1398'FWL, PR, NB/CD)	EX. LINDBLAD 20-25X	EX. LINDBLAD 20-25X AWB	EX. LINDBLAD 20-25X AWP	16740.59	853.06	16740.59	16767.58	1.54	16767.58	PASS
SEC 21-T06N-R66W	SLOT#15 DONN 4C-20-L (778'FNL & 251'FEL, SEC.21)	DONN 4C-20-L	DONN 4C-20-L PWB	DONN 4C-20-L PWP (REV-A.0)	25.00	159.94	18000.13	18000.13	1.60	18000.13	PASS
SEC 22-T06N-R66W	SLOT#01EX:ALICE M. HOFFNER #1-22 (1980'FNL&835'FWL,SEC.22,7300'MD,PA)	ALICE M. HOFFNER #1-22	ALICE M. HOFFNER #1-22 AWB	ALICE M. HOFFNER #1-22 AWP	6693.36	344.96	6693.36	6725.00	1.61	6725.00	PASS
SEC 21-T06N-R66W	SLOT#14 DONN 30N-20B-L (758'FNL & 250'FEL, SEC.21)	DONN 30N-20B-L	DONN 30N-20B-L PWB	DONN 30N-20B-L PWP (REV-B.0)	25.00	179.98	17425.00	18000.13	1.82	18000.13	PASS
SEC 21-T06N-R66W	SLOT#04 EX. FRITZLER 2-2-21(1707'FNL & 569'FWL, PR, NB/CD)	EX. FRITZLER 2-2-21	EX. FRITZLER 2-2-21 AWB	EX. FRITZLER 2-2-21 AWP	11596.95	768.58	11596.95	11725.00	1.88	11725.00	PASS
SEC 20-T06N-R66W	SLOT#01 HOOD 25N-22C-M (765'FSL & 1122'FEL SEC.20)	HOOD 25N-22C-M	HOOD 25N-22C-M AWB	HOOD 25N-22C-M AWP	12878.81	619.08	12878.81	12943.09	1.98	12943.09	PASS
SEC 19-T06N-R66W	SLOT#02 EX. POPE 19-1G6 (661'FNL & 538'FEL, PR, CODL)	EX. POPE 19-1G6	EX. POPE 19-1G6 AWB	EX. POPE 19-1G6 AWP	18000.13	1590.78	18000.13	18000.13	2.03	18000.13	PASS
SEC 21-T06N-R66W	SLOT#13 DONN 30N-20A-L (738'FNL & 250'FEL, SEC.21)	DONN 30N 20A-L	DONN 30N-20A-L PWB	DONN 30N-20A-L PWP (REV-B.0)	25.00	200.01	18000.13	18000.13	2.04	18000.13	PASS
SEC 19-T06N-R66W	SLOT#01 EX. HALL 1 (2062'FNL & 660'FEL, PR, CODL)	EX. HALL 1	EX. HALL 1AWB	EX. HALL 1AWP	18000.13	825.11	18000.13	18000.13	2.08	18000.13	PASS
SEC 17-T06N-R66W	SLOT#04 EX. HOOD #6-2-20 (659'FSL & 653'FEL, PR, NB/CD)	EX. HOOD #6-2-20	EX. HOOD #6-2-20 AWB	EX. HOOD #6-2-20 AWP	14078.97	824.27	14078.97	14102.93	2.21	14102.93	PASS
SEC 21-T06N-R66W	SLOT#01 EX:FRITZLER #21-22-14 (1702'FNL & 583'FWL SEC.21, PR)	FRITZLER #21-22-14	FRITZLER #21-22-14 AWB	FRITZLER #21-22-14 AWP	11533.52	599.89	11533.52	11558.32	2.34	11558.32	PASS
SEC 20-T06N-R66W	SLOT#03 EX. HOOD 41-20 (661'FNL & 661'FEL, PR, NB/CD)	EX. HOOD 41-20	EX. HOOD 41-20AWB	EX. HOOD 41-20AWP	13475.00	1448.91	13475.00	13581.35	2.35	13581.35	PASS
SEC 20-T06N-R66W	SLOT#02 HOOD 25C-22-M (745'FSL & 1122'FEL SEC.20)	HOOD 25C-22-M	HOOD 25C-22-M AWB	HOOD 25C-22-M AWP	12887.93	758.57	12887.93	12965.56	2.38	12965.56	PASS
SEC 21-T06N-R66W	SLOT#05 EX. LEFFLER FARM 1-21 (860'FNL & 1980'FWL, PA, CODL)	EX. LEFFLER FARM 1-21	EX. LEFFLER FARM 1-21 AWB	EX. LEFFLER FARM 1-21 AWP	10830.00	1231.01	10830.00	10925.00	2.47	10925.00	PASS
SEC 21-T06N-R66W	SLOT#05 EX. FRITZLER 0-2-21 (1706'FNL & 518'FWL, PR, NB/CD)	EX. FRITZLER 0-2-21	EX. FRITZLER 0-2-21 AWB	EX. FRITZLER 0-2-21 AWP	12783.13	769.85	12783.13	12832.05	2.48	12832.05	PASS
SEC 20-T06N-R66W	SLOT#07 EX. GOETZEL 20-31 (1775'FSL & 2186'FWL, SI, CODL)	EX. GOETZEL 20-31	EX. GOETZEL 20-31 AWB	EX. GOETZEL 20-31 AWP	15987.50	1330.35	15987.50	16090.23	2.56	16090.23	PASS
SEC 21-T06N-R66W	SLOT#02 EX. FRITZLER 11-21 (736'FNL & 695'FWL, PR, NB/CD)	EX. FRITZLER 11-21	EX. FRITZLER 11-21 AWB	EX. FRITZLER 11-21 AWP	12150.00	1442.30	12150.00	12263.59	2.59	12263.59	PASS
SEC 20-T06N-R66W	SLOT#03 EX. LINDBLAD 20-21 (660'FNL & 1987'FWL, PR, CODL)	EX. LINDBLAD 20-21	EX. LINDBLAD 20-21 AWB	EX. LINDBLAD 20-21 AWP	16156.09	1513.98	16156.09	16254.61	2.87	16254.61	PASS
SEC 21-T06N-R66W	SLOT#09 LEFFLER 8C-23-L (1961'FNL & 275'FEL SEC.21)	LEFFLER 8C-23-L	LEFFLER 8C-23-L AWB	LEFFLER 8C-23-L AWP	7413.59	234.87	7413.59	7459.49	2.98	7459.49	PASS

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 4 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CALCULATION RANGE & CUTOFF

From: 25.00ft MD	To: 18000.13ft MD	C-C Cutoff: 1000.00 ft
------------------	-------------------	------------------------

OFFSET WELL CLEARANCE SUMMARY (78 Offset Wellpaths selected) Ratios are calculated in Closest Approach plane

Offset Facility	Offset Slot	Offset Well	Offset Wellbore	Offset Wellpath	C-C Clearance Distance			ACR Separation Ratio			
					Ref MD [ft]	Min C-C Clear Dist [ft]	Diverging from MD [ft]	Ref MD of Min Ratio [ft]	Min Ratio	Min Ratio Dvrg from [ft]	ACR Status
SEC.20-T06N-R66W	SLOT#06 EX. BATES 20-22 (471'FNL & 663'FWL, PR, CODL)	EX. BATES 20-22	EX. BATES 20-22 AWB	EX. BATES 20-22 AWP	17473.75	1877.08	17473.75	17609.73	3.19	17609.73	PASS
SEC.18-T06N-R66W	SLOT#01 EX. CARLSON #18-44 (531'FSL & 918'FEL, PR, NB/CD)	EX. CARLSON #18-44	EX. CARLSON #18-44 AWB	EX. CARLSON #18-44 AWP	18000.13	2832.83	18000.13	18000.13	3.58	18000.13	PASS
SEC.20-T06N-R66W	SLOT#03 HOOD 11N-22B-M (725'FSL & 1122'FEL SEC.20)	HOOD 11N-22B-M	HOOD 11N-22B-M AWB	HOOD 11N-22B-M AWP	11625.00	1087.16	12525.00	11789.83	3.61	12825.00	PASS
SEC.20-T06N-R66W	SLOT#01 EX. ENGLISH 31-20 (200'FNL & 2440'FEL, SI, CODL)	EX. ENGLISH 31-20	EX. ENGLISH 31-20 AWB	EX. ENGLISH 31-20 AWP	14925.00	1939.15	14925.00	15463.87	4.03	15463.87	PASS
SEC.20-T06N-R66W	SLOT#04 HOOD 11N-22A-M (705'FSL & 1122'FEL SEC.20)	HOOD 11N-22A-M	HOOD 11N-22A-M AWB	HOOD 11N-22A-M AWP	11962.50	1241.10	12525.00	12893.38	4.03	12893.38	PASS
SEC.20-T06N-R66W	SLOT#05 HOOD 11C-22-M (685'FSL & 1122'FEL SEC.20)	HOOD 11C-22-M	HOOD 11C-22-M AWB	HOOD 11C-22-M AWP	12953.13	1454.04	12953.13	13163.93	4.49	13163.93	PASS
SEC.21-T06N-R66W	SLOT#11 LEFFLER 8N-23C-L (2001'FNL & 275'FEL SEC.21)	LEFFLER 8N-23C-L	LEFFLER 8N-23C-L AWB	LEFFLER 8N-23C-L AWP	7460.94	358.77	7460.94	7372.26	4.53	7525.00	PASS
SEC.21-T06N-R66W	SLOT#01 EX.DORIS #1 (1920'SL & 680'FWL SEC.21, PR, 7238'MD)	DORIS #1	DORIS #1 AWB	DORIS #1 AWP	12188.37	1304.23	12188.37	12338.71	4.63	12338.71	PASS
SEC.16-T06N-R66W	SLOT#01 EX. STATE HOPPE #16-1 (561'FSL & 664'FWL, PR-NB/CD)	EX. STATE HOPPE #16-1	EX. STATE HOPPE #16-1 AWB	EX. STATE HOPPE #16-1 AWP	12107.50	2609.77	12107.50	12494.60	4.64	12494.60	PASS
SEC.21-T06N-R66W	SLOT#08 LEFFLER 8N-23A-L (1941'FNL & 275'FEL SEC.21)	LEFFLER 8N-23A-L	LEFFLER 8N-23A-L AWB	LEFFLER 8N-23A-L AWP	7012.50	382.95	7012.50	7019.04	4.67	7019.04	PASS
SEC.20-T06N-R66W	SLOT#06 HOOD 23N-22C-M (665'FSL & 1122'FEL SEC.20)	HOOD 23N-22C-M	HOOD 23N-22C-M AWB	HOOD 23N-22C-M AWP	10887.50	1784.45	12525.00	13412.14	5.58	13412.14	PASS
SEC.21-T06N-R66W	SLOT#01 EX.HAROLD "B" #1 (1980'FSL & 1790'FWL SEC.21, PR, 7275'MD)	HAROLD "B" #1	HAROLD "B" #1 AWB	HAROLD "B" #1 AWP	11159.20	1217.36	11159.20	11352.21	5.63	11352.21	PASS
SEC.17-T06N-R66W	SLOT#02 EX. FRITZLER #6-8-17 (660'FSL & 668'FEL, PR NB/CD)	EX. FRITZLER #6-8-17	EX. FRITZLER #6-8-17 AWB	EX. FRITZLER #6-8-17 AWP	14287.50	2190.20	14287.50	14462.15	5.75	14462.15	PASS
SEC.16-T06N-R66W	SLOT#02 EX. BURMAN #16-43 (466'FSL & 1793'FEL, PR, NB/CD)	EX. BURMAN #16-43	EX. BURMAN #16-43 AWB	EX. BURMAN #16-43 AWP	25.00	2057.49	9225.00	9770.44	5.81	9770.44	PASS
SEC.20-T06N-R66W	SLOT#07 HOOD 23C-22-M (585'FSL & 1122'FEL SEC.20)	HOOD 23C-22-M	HOOD 23C-22-M AWB	HOOD 23C-22-M AWP	12947.50	1905.72	12947.50	13301.31	5.87	13301.31	PASS
SEC.21-T06N-R66W	SLOT#12 LEFFLER 40C-23-L (2021'FNL & 275'FEL SEC.21)	LEFFLER 40C-23-L	LEFFLER 40C-23-L AWB	LEFFLER 40C-23-L AWP	7795.63	467.94	7795.63	7816.42	5.93	7816.42	PASS
SEC.20-T06N-R66W	SLOT#08 HOOD 23N-22B-M (565'FSL & 1122'FEL SEC.20)	HOOD 23N-22B-M	HOOD 23N-22B-M AWB	HOOD 23N-22B-M AWP	12650.00	2099.06	12650.00	13471.77	6.51	13471.77	PASS
SEC.17-T06N-R66W	SLOT#01 EX.FRITZLER #8-8-17 (658'FSL & 608'FEL, PR,NB/CD)	EX. FRITZLER #8-8-17	EX. FRITZLER #8-8-17 AWB	EX. FRITZLER #8-8-17 AWP	12830.00	2125.46	12830.00	13195.91	6.61	13195.91	PASS
SEC.17-T06N-R66W	SLOT#03 EX. FRITZLER #34-17 (660'FSL & 683'FEL, PR, NB/CD)	EX. FRITZLER #34-17	EX. FRITZLER #34-17 AWB	EX. FRITZLER #34-17 AWP	14625.00	2713.50	14625.00	14895.81	6.61	14895.81	PASS
SEC.21-T06N-R66W	SLOT#07 LEFFLER 41C-23-L (1921'FNL & 275'FEL SEC.21)	LEFFLER 41C-23-L	LEFFLER 41C-23-L AWB	LEFFLER 41C-23-L AWP	7710.28	569.05	7710.28	7848.80	7.06	7848.80	PASS
SEC.20-T06N-R66W	SLOT#09 HOOD 14N-22A-M (545'FSL & 1122'FEL SEC.20)	HOOD 14N-22A-M	HOOD 14N-22A-M OWB AWB	HOOD 14N-22A-M OWB AWP	12625.00	2326.77	12625.00	13525.00	7.24	13525.00	PASS
SEC.20-T06N-R66W	SLOT#09 HOOD 14N-22A-M (545'FSL & 1122'FEL SEC.20)	HOOD 14N-22A-M	HOOD 14N-22A-M S.T.#01 AWB	HOOD 14N-22A-M S.T.#01 AWP	12625.00	2326.77	12625.00	13525.00	7.24	13525.00	PASS
SEC.20-T06N-R66W	SLOT#10 HOOD 14N-22B-M (525'FSL & 1122'FEL SEC.20)	HOOD 14N-22B-M	HOOD 14N-22B-M AWB	HOOD 14N-22B-M AWP	11955.00	2594.08	12925.00	13691.65	7.92	13691.65	PASS
SEC.21-T06N-66W	SLOT#06 EX. FRITZLER 11-21-4 (645'FNL & 664'FWL, PR, NB/CD)	EX. FRITZLER 11-21-4	EX. FRITZLER 11-21-4 AWB	EX. FRITZLER 11-21-4 AWP	11530.00	2095.22	11530.00	11936.48	7.97	11936.48	PASS
SEC.21-T06N-R66W	SLOT#01 EX.BILLINGS #43-21 (2270'FSL & 960'FEL SEC.21, PR, 7257'MD)	BILLINGS #43-21	BILLINGS #43-21 AWB	BILLINGS #43-21 AWP	8547.34	1008.46	8547.34	8768.12	7.99	8768.12	PASS
SEC.20-T06N-R66W	SLOT#11 HOOD 36C-22-M (505'FSL & 1122'FEL SEC.20)	HOOD 36C-22-M	HOOD 36C-22-M AWB	HOOD 36C-22-M AWP	12875.00	2756.03	12875.00	13925.00	8.23	13925.00	PASS
SEC.21-T06N-R66W	SLOT#02 EX.KOHLER #21-10 (1976'FSL & 1987'FEL SEC.21, PR, 7281'MD)	KOHLER #21-10	KOHLER #21-10 AWB	KOHLER #21-10 AWP	9600.00	1229.92	9600.00	9845.95	8.43	9845.95	PASS
SEC.20-T06N-R66W	SLOT#12 HOOD 36N-22C-M (485'FSL & 1122'FEL SEC.20)	HOOD 36N-22C-M	HOOD 36N-22C-M AWB	HOOD 36N-22C-M AWP	11687.50	3041.47	13025.00	14071.25	9.20	14071.25	PASS
SEC.21-T06N-R66W	SLOT#04 EX.LEFFLER 1 #21-2 (660'FNL & 1880'FEL SEC.21,PR,7340'MD)	LEFFLER 1 #21-2	LEFFLER 1 #21-2 AWB	LEFFLER 1 #21-2 AWP	9500.00	1421.98	9500.00	9850.12	9.52	9850.12	PASS
SEC.21-T06N-R66W	SLOT#06 LEFFLER 41N-23C-L (1901'FNL & 275'FEL SEC.21)	LEFFLER 41N-23C-L	LEFFLER 41N-23C-L AWB	LEFFLER 41N-23C-L AWP	3252.97	551.45	7133.21	7133.21	10.13	7925.00	PASS
SEC.21-T06N-R66W	SLOT#05 LEFFLER 1C-23-L (1881'FNL & 275'FEL SEC.21)	LEFFLER 1C-23-L	LEFFLER 1C-23-L AWB	LEFFLER 1C-23-L AWP	3183.12	513.30	7925.00	8241.33	11.73	8241.33	PASS
SEC.21-T06N-R66W	SLOT#04 LEFFLER 1N-23B-L (1861'FNL & 275'FEL SEC.21)	LEFFLER 1N-23B-L	LEFFLER 1N-23B-L AWB	LEFFLER 1N-23B-L AWP	2979.14	456.85	7025.00	6961.66	13.33	8225.00	PASS
SEC.21-T06N-R66W	SLOT#01 EX. MAURICE LEFFLER 1 (660'FNL & 1980'FWL, PA, UNK)	EX. MAURICE LEFFLER 1	EX. MAURICE LEFFLER 1 AWB	EX. MAURICE LEFFLER 1 AWP	10840.00	3053.39	10840.00	12466.41	14.14	12466.41	PASS
SEC.21-T06N-R66W	SLOT#03 EX.KOHLER J #1-21 (460'FSL & 1978'FEL SEC.21, PR, 7318'MD)	KOHLER J #1-21	KOHLER J #1-21 AWB	KOHLER J #1-21 AWP	9637.50	2763.27	9637.50	10725.00	15.67	10725.00	PASS
SEC.21-T06N-R66W	SLOT#01 LEFFLER 26N-23B-L (1801'FNL & 275'FEL SEC.21)	LEFFLER 26N-23B-L	LEFFLER 26N-23B-L AWB	LEFFLER 26N-23B-L AWP	2256.80	330.85	7725.00	2425.00	16.42	9025.00	PASS
SEC.21-T06N-R66W	SLOT#03 LEFFLER 1N-23C-L (1841'FNL & 275'FEL SEC.21)	LEFFLER 1N-23C-L	LEFFLER 1N-23C-L AWB	LEFFLER 1N-23C-L AWP	2753.20	398.88	8125.00	8767.54	16.82	8767.54	PASS
SEC.21-T06N-R66W	SLOT#01 LEFFLER 26N-23B-L (1801'FNL & 275'FEL SEC.21)	LEFFLER 26N-23B-L	LEFFLER 26N-23B-L PWB	LEFFLER 26N-23B-L PWP REV-B.0	2316.56	341.42	7925.00	2489.93	17.29	9025.00	PASS
SEC.21-T06N-R66W	SLOT#02 LEFFLER 26C-23-L (1821'FNL & 275'FEL SEC.21)	LEFFLER 26C-23-L	LEFFLER 26C-23-L AWB	LEFFLER 26C-23-L AWP	2636.72	380.63	8025.00	8825.00	18.07	8825.00	PASS

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 5 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. BROWN 20-13 AWB Offset Wellpath: EX. BROWN 20-13 AWP

Facility: SEC.20-T06N-R66W				Slot: SLOT#04 EX. BROWN 20-13 (2179'FNL & 1796'FEL, PR, NB/CD)				Well: EX. BROWN 20-13				Threshold Value=1.00 † = interpolated/extrapolated station			
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status			
25.00	25.00	0.00	0.00	-2.00	25.00	-1348.84	-6854.89	-101.13	6986.34	25.57	283.94	PASS			
125.00†	125.00	0.00	0.00	98.00	125.00	-1348.84	-6854.89	-101.13	6986.34	25.57	283.91	PASS			
225.00†	225.00	0.00	0.00	198.00	225.00	-1348.84	-6854.89	-101.13	6986.34	25.57	283.83	PASS			
300.00	300.00	0.00	0.00	273.00	300.00	-1348.84	-6854.89	-101.13	6986.34	25.58	283.74	PASS			
325.00†	325.00	-0.09	0.06	298.00	325.00	-1348.84	-6854.89	115.07	6986.39	25.59	283.71	PASS			
425.00†	424.96	-2.20	1.61	397.96	424.96	-1348.84	-6854.89	115.07	6987.50	25.60	283.55	PASS			
525.00†	524.77	-7.13	5.22	497.77	524.77	-1348.84	-6854.89	115.07	6990.09	25.63	283.30	PASS			
625.00†	624.30	-14.86	10.88	597.30	624.30	-1348.84	-6854.89	115.07	6994.16	25.67	283.06	PASS			
725.00†	723.44	-25.39	18.59	696.44	723.44	-1348.84	-6854.89	115.06	6999.73	25.71	282.82	PASS			
825.00†	822.07	-38.71	28.34	795.07	822.07	-1348.84	-6854.89	115.06	7006.80	25.76	282.57	PASS			
895.18	890.91	-49.71	36.39	863.91	890.91	-1348.84	-6854.89	115.05	7012.67	25.79	282.41	PASS			
925.00†	920.09	-54.67	40.02	893.09	920.09	-1348.84	-6854.89	115.09	7015.32	25.81	282.36	PASS			
1025.00†	1017.94	-71.32	52.20	990.94	1017.94	-1348.84	-6854.89	115.24	7024.25	25.85	282.18	PASS			
1125.00†	1115.79	-87.96	64.39	1088.79	1115.79	-1348.84	-6854.89	115.39	7033.23	25.91	281.93	PASS			
1225.00†	1213.64	-104.60	76.57	1186.64	1213.64	-1348.84	-6854.89	115.54	7042.25	25.97	281.61	PASS			
1325.00†	1311.48	-121.25	88.76	1284.48	1311.48	-1348.84	-6854.89	115.69	7051.33	26.03	281.23	PASS			
1425.00†	1409.33	-137.89	100.94	1382.33	1409.33	-1348.84	-6854.89	115.84	7060.45	26.10	280.79	PASS			
1525.00†	1507.18	-154.53	113.12	1480.18	1507.18	-1348.84	-6854.89	115.99	7069.63	26.18	280.29	PASS			
1625.00†	1605.03	-171.18	125.31	1578.03	1605.03	-1348.84	-6854.89	116.13	7078.85	26.27	279.73	PASS			
1725.00†	1702.88	-187.82	137.49	1675.88	1702.88	-1348.84	-6854.89	116.28	7088.12	26.35	279.12	PASS			
1825.00†	1800.73	-204.47	149.67	1773.73	1800.73	-1348.84	-6854.89	116.43	7097.43	26.16	278.84	PASS			
1925.00†	1898.58	-221.11	161.86	1871.58	1898.58	-1348.84	-6854.89	116.57	7106.80	26.20	278.81	PASS			
2025.00†	1996.43	-237.75	174.04	1969.43	1996.43	-1348.84	-6854.89	116.72	7116.21	26.25	278.63	PASS			
2125.00†	2094.28	-254.40	186.22	2067.28	2094.28	-1348.84	-6854.89	116.86	7125.67	26.31	278.32	PASS			
2225.00†	2192.13	-271.04	198.41	2165.13	2192.13	-1348.84	-6854.89	117.01	7135.17	26.39	277.86	PASS			
2325.00†	2289.98	-287.68	210.59	2262.98	2289.98	-1348.84	-6854.89	117.16	7144.73	26.48	277.26	PASS			
2425.00†	2387.83	-304.33	222.77	2360.83	2387.83	-1348.84	-6854.89	117.30	7154.33	26.58	276.53	PASS			
2525.00†	2485.68	-320.97	234.96	2458.68	2485.68	-1348.84	-6854.89	117.44	7163.97	26.69	275.67	PASS			
2625.00†	2583.53	-337.62	247.14	2556.53	2583.53	-1348.84	-6854.89	117.59	7173.67	26.82	274.68	PASS			
2725.00†	2681.38	-354.26	259.33	2654.38	2681.38	-1348.84	-6854.89	117.73	7183.40	26.96	273.58	PASS			
2825.00†	2779.23	-370.90	271.51	2752.23	2779.23	-1348.84	-6854.89	117.87	7193.19	27.12	272.36	PASS			
2925.00†	2877.08	-387.55	283.69	2850.08	2877.08	-1348.84	-6854.89	118.02	7203.02	27.28	271.03	PASS			
3025.00†	2974.93	-404.19	295.88	2947.93	2974.93	-1348.84	-6854.89	118.16	7212.90	27.46	269.61	PASS			
3125.00†	3072.78	-420.83	308.06	3045.78	3072.78	-1348.84	-6854.89	118.30	7222.82	27.65	268.08	PASS			
3225.00†	3170.63	-437.48	320.24	3143.63	3170.63	-1348.84	-6854.89	118.44	7232.78	27.85	266.47	PASS			
3325.00†	3268.48	-454.12	332.43	3241.48	3268.48	-1348.84	-6854.89	118.58	7242.80	28.06	264.78	PASS			
3425.00†	3366.33	-470.77	344.61	3339.33	3366.33	-1348.84	-6854.89	118.72	7252.85	28.28	263.01	PASS			
3525.00†	3464.18	-487.41	356.79	3437.18	3464.18	-1348.84	-6854.89	118.86	7262.95	28.51	261.17	PASS			
3625.00†	3562.03	-504.05	368.98	3535.03	3562.03	-1348.84	-6854.89	119.00	7273.10	28.76	259.27	PASS			
3725.00†	3659.88	-520.70	381.16	3632.88	3659.88	-1348.84	-6854.89	119.14	7283.29	29.01	257.31	PASS			
3825.00†	3757.73	-537.34	393.34	3730.73	3757.73	-1348.84	-6854.89	119.28	7293.52	29.27	255.30	PASS			
3925.00†	3855.57	-553.98	405.53	3828.57	3855.57	-1348.84	-6854.89	119.42	7303.80	29.55	253.25	PASS			
4025.00†	3953.42	-570.63	417.71	3926.42	3953.42	-1348.84	-6854.89	119.56	7314.12	29.83	251.15	PASS			
4125.00†	4051.27	-587.27	429.90	4024.27	4051.27	-1348.84	-6854.89	119.70	7324.49	30.12	249.03	PASS			
4225.00†	4149.12	-603.92	442.08	4122.12	4149.12	-1348.84	-6854.89	119.84	7334.90	30.42	246.87	PASS			

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 6 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. BROWN 20-13 AWB Offset Wellpath: EX. BROWN 20-13 AWP

Facility: SEC.20-T06N-R66W Slot: SLOT#04 EX. BROWN 20-13 (2179'FNL & 1796'FEL, PR, NB/CD) Well: EX. BROWN 20-13 Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
4325.00†	4246.97	-620.56	454.26	4219.97	4246.97	-1348.84	-6854.89	119.97	7345.35	30.72	244.69	PASS	
4425.00†	4344.82	-637.20	466.45	4317.82	4344.82	-1348.84	-6854.89	120.11	7355.84	31.04	242.49	PASS	
4525.00†	4442.67	-653.85	478.63	4415.67	4442.67	-1348.84	-6854.89	120.25	7366.38	31.36	240.27	PASS	
4625.00†	4540.52	-670.49	490.81	4513.52	4540.52	-1348.84	-6854.89	120.38	7376.96	31.70	238.04	PASS	
4725.00†	4638.37	-687.13	503.00	4611.37	4638.37	-1348.84	-6854.89	120.52	7387.58	32.03	235.81	PASS	
4825.00†	4736.22	-703.78	515.18	4709.22	4736.22	-1348.84	-6854.89	120.65	7398.25	32.38	233.57	PASS	
4925.00†	4834.07	-720.42	527.36	4807.07	4834.07	-1348.84	-6854.89	120.79	7408.96	57.40	130.67	PASS	
5025.00†	4931.92	-737.07	539.55	4904.92	4931.92	-1348.84	-6854.89	120.92	7419.71	58.40	128.60	PASS	
5125.00†	5029.77	-753.71	551.73	5002.77	5029.77	-1348.84	-6854.89	121.06	7430.50	60.12	125.06	PASS	
5225.00†	5127.62	-770.35	563.91	5100.62	5127.62	-1348.84	-6854.89	121.19	7441.33	62.47	120.48	PASS	
5325.00†	5225.47	-787.00	576.10	5198.47	5225.47	-1348.84	-6854.89	121.33	7452.20	65.33	115.31	PASS	
5425.00†	5323.32	-803.64	588.28	5296.32	5323.32	-1348.84	-6854.89	121.46	7463.12	68.59	109.94	PASS	
5525.00†	5421.17	-820.28	600.47	5394.17	5421.17	-1348.84	-6854.89	121.59	7474.07	72.15	104.61	PASS	
5625.00†	5519.02	-836.93	612.65	5492.02	5519.02	-1348.84	-6854.89	121.72	7485.07	75.94	99.48	PASS	
5725.00†	5616.87	-853.57	624.83	5589.87	5616.87	-1348.84	-6854.89	121.86	7496.10	79.92	94.62	PASS	
5825.00†	5714.72	-870.22	637.02	5687.72	5714.72	-1348.84	-6854.89	121.99	7507.18	84.04	90.08	PASS	
5925.00†	5812.57	-886.86	649.20	5785.57	5812.57	-1348.84	-6854.89	122.12	7518.30	88.27	85.85	PASS	
6025.00†	5910.42	-903.50	661.38	5883.42	5910.42	-1348.84	-6854.89	122.25	7529.46	92.59	81.94	PASS	
6125.00†	6008.27	-920.15	673.57	5981.27	6008.27	-1348.84	-6854.89	122.38	7540.66	96.99	78.32	PASS	
6225.00†	6106.12	-936.79	685.75	6079.12	6106.12	-1348.84	-6854.89	122.51	7551.89	101.44	74.96	PASS	
6325.00†	6203.97	-953.43	697.93	6176.97	6203.97	-1348.84	-6854.89	122.64	7563.17	105.94	71.86	PASS	
6425.00†	6301.82	-970.08	710.12	6274.82	6301.82	-1348.84	-6854.89	122.77	7574.49	110.48	68.99	PASS	
6525.00†	6399.66	-986.72	722.30	6372.66	6399.66	-1348.84	-6854.89	122.90	7585.84	115.07	66.32	PASS	
6605.93	6478.85	-1000.19	732.16	6451.85	6478.85	-1348.84	-6854.89	123.00	7595.06	118.80	64.31	PASS	
6625.00†	6497.54	-1003.38	734.20	6470.54	6497.54	-1348.84	-6854.89	115.74	7596.95	119.68	63.85	PASS	
6725.00†	6595.97	-1020.39	735.57	6568.97	6595.97	-1348.84	-6854.89	67.21	7597.56	124.47	61.38	PASS	
6825.00†	6693.34	-1037.59	721.30	6666.34	6693.34	-1348.84	-6854.89	36.71	7582.58	129.69	58.78	PASS	
6925.00†	6787.24	-1054.57	691.74	6760.24	6787.24	-1348.84	-6854.89	23.96	7552.36	134.80	56.32	PASS	
7025.00†	6875.37	-1070.91	647.62	6848.37	6875.37	-1348.84	-6854.89	17.77	7507.66	139.47	54.10	PASS	
7125.00†	6955.55	-1086.20	590.03	6928.55	6955.55	-1348.84	-6854.89	14.28	7449.55	143.60	52.13	PASS	
7225.00†	7025.81	-1100.06	520.38	6998.81	7025.81	-1348.84	-6854.89	12.12	7379.47	147.15	50.39	PASS	
7325.00†	7084.42	-1112.16	440.40	7057.42	7084.42	-1348.84	-6854.89	10.69	7299.13	150.05	48.87	PASS	
7425.00†	7129.94	-1122.20	352.04	7102.94	7129.94	-1348.84	-6854.89	9.64	7210.50	152.24	47.58	PASS	
7525.00†	7161.25	-1129.93	257.49	7134.25	7161.25	-1348.84	-6854.89	8.63	7115.76	153.72	46.50	PASS	
7625.00†	7177.57	-1135.16	159.08	7150.57	7177.57	-1348.84	-6854.89	5.94	7017.23	154.47	45.63	PASS	
7682.94	7180.00	-1136.99	101.24	7153.00	7180.00	-1348.84	-6854.89	-114.04	6959.36	154.58	45.22	PASS	
7725.00†	7179.88	-1138.00	59.19	7152.88	7179.88	-1348.84	-6854.89	-113.91	6917.30	154.58	44.95	PASS	
7825.00†	7179.59	-1140.39	-40.78	7152.59	7179.59	-1348.84	-6854.89	-113.60	6817.30	154.57	44.30	PASS	
7925.00†	7179.29	-1142.78	-140.75	7152.29	7179.29	-1348.84	-6854.89	-113.29	6717.30	154.56	43.66	PASS	
8025.00†	7179.00	-1145.17	-240.72	7152.00	7179.00	-1348.84	-6854.89	-112.98	6617.31	154.55	43.01	PASS	
8125.00†	7178.71	-1147.56	-340.69	7151.71	7178.71	-1348.84	-6854.89	-112.67	6517.31	154.54	42.36	PASS	
8225.00†	7178.42	-1149.95	-440.66	7151.42	7178.42	-1348.84	-6854.89	-112.36	6417.31	154.54	41.71	PASS	
8325.00†	7178.13	-1152.34	-540.63	7151.13	7178.13	-1348.84	-6854.89	-112.04	6317.32	154.53	41.06	PASS	
8425.00†	7177.84	-1154.73	-640.61	7150.84	7177.84	-1348.84	-6854.89	-111.73	6217.32	154.53	40.41	PASS	
8525.00†	7177.55	-1157.12	-740.58	7150.55	7177.55	-1348.84	-6854.89	-111.41	6117.32	154.53	39.77	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 7 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. BROWN 20-13 AWB Offset Wellpath: EX. BROWN 20-13 AWP

Facility: SEC.20-T06N-R66W Slot: SLOT#04 EX. BROWN 20-13 (2179'FNL & 1796'FEL, PR, NB/CD) Well: EX. BROWN 20-13 Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
8625.00†	7177.25	-1159.52	-840.55	7150.25	7177.25	-1348.84	-6854.89	-111.09	6017.32	154.53	39.12	PASS	
8725.00†	7176.96	-1161.91	-940.52	7149.96	7176.96	-1348.84	-6854.89	-110.77	5917.33	154.53	38.47	PASS	
8825.00†	7176.67	-1164.30	-1040.49	7149.67	7176.67	-1348.84	-6854.89	-110.45	5817.33	154.53	37.81	PASS	
8925.00†	7176.38	-1166.69	-1140.46	7149.38	7176.38	-1348.84	-6854.89	-110.12	5717.33	154.53	37.16	PASS	
9025.00†	7176.09	-1169.08	-1240.43	7149.09	7176.09	-1348.84	-6854.89	-109.80	5617.34	154.54	36.51	PASS	
9125.00†	7175.80	-1171.47	-1340.40	7148.80	7175.80	-1348.84	-6854.89	-109.47	5517.34	154.54	35.86	PASS	
9225.00†	7175.51	-1173.86	-1440.37	7148.51	7175.51	-1348.84	-6854.89	-109.15	5417.35	154.55	35.21	PASS	
9325.00†	7175.21	-1176.25	-1540.34	7148.21	7175.21	-1348.84	-6854.89	-108.82	5317.35	154.56	34.56	PASS	
9425.00†	7174.92	-1178.64	-1640.32	7147.92	7174.92	-1348.84	-6854.89	-108.49	5217.35	154.57	33.91	PASS	
9525.00†	7174.63	-1181.03	-1740.29	7147.63	7174.63	-1348.84	-6854.89	-108.16	5117.36	154.58	33.25	PASS	
9625.00†	7174.34	-1183.42	-1840.26	7147.34	7174.34	-1348.84	-6854.89	-107.83	5017.36	154.59	32.60	PASS	
9725.00†	7174.05	-1185.82	-1940.23	7147.05	7174.05	-1348.84	-6854.89	-107.49	4917.37	154.60	31.95	PASS	
9825.00†	7173.76	-1188.21	-2040.20	7146.76	7173.76	-1348.84	-6854.89	-107.16	4817.37	154.62	31.30	PASS	
9925.00†	7173.47	-1190.60	-2140.17	7146.47	7173.47	-1348.84	-6854.89	-106.82	4717.38	154.63	30.64	PASS	
10025.00†	7173.17	-1192.99	-2240.14	7146.17	7173.17	-1348.84	-6854.89	-106.49	4617.38	154.65	29.99	PASS	
10125.00†	7172.88	-1195.38	-2340.11	7145.88	7172.88	-1348.84	-6854.89	-106.15	4517.39	154.67	29.34	PASS	
10225.00†	7172.59	-1197.77	-2440.08	7145.59	7172.59	-1348.84	-6854.89	-105.81	4417.39	154.69	28.68	PASS	
10325.00†	7172.30	-1200.16	-2540.05	7145.30	7172.30	-1348.84	-6854.89	-105.47	4317.40	154.71	28.03	PASS	
10425.00†	7172.01	-1202.55	-2640.03	7145.01	7172.01	-1348.84	-6854.89	-105.13	4217.41	154.74	27.38	PASS	
10525.00†	7171.72	-1204.94	-2740.00	7144.72	7171.72	-1348.84	-6854.89	-104.78	4117.41	154.76	26.72	PASS	
10625.00†	7171.42	-1207.33	-2839.97	7144.42	7171.42	-1348.84	-6854.89	-104.44	4017.42	154.79	26.07	PASS	
10725.00†	7171.13	-1209.72	-2939.94	7144.13	7171.13	-1348.84	-6854.89	-104.09	3917.43	154.82	25.42	PASS	
10825.00†	7170.84	-1212.11	-3039.91	7143.84	7170.84	-1348.84	-6854.89	-103.75	3817.43	154.85	24.76	PASS	
10925.00†	7170.55	-1214.51	-3139.88	7143.55	7170.55	-1348.84	-6854.89	-103.40	3717.44	154.88	24.11	PASS	
11025.00†	7170.26	-1216.90	-3239.85	7143.26	7170.26	-1348.84	-6854.89	-103.05	3617.45	154.91	23.45	PASS	
11125.00†	7169.97	-1219.29	-3339.82	7142.97	7169.97	-1348.84	-6854.89	-102.70	3517.46	154.95	22.80	PASS	
11225.00†	7169.68	-1221.68	-3439.79	7142.68	7169.68	-1348.84	-6854.89	-102.35	3417.47	154.98	22.15	PASS	
11325.00†	7169.38	-1224.07	-3539.76	7142.38	7169.38	-1348.84	-6854.89	-102.00	3317.48	155.02	21.49	PASS	
11425.00†	7169.09	-1226.46	-3639.74	7142.09	7169.09	-1348.84	-6854.89	-101.65	3217.49	155.06	20.84	PASS	
11525.00†	7168.80	-1228.85	-3739.71	7141.80	7168.80	-1348.84	-6854.89	-101.30	3117.50	155.11	20.19	PASS	
11625.00†	7168.51	-1231.24	-3839.68	7141.51	7168.51	-1348.84	-6854.89	-100.95	3017.51	155.15	19.53	PASS	
11725.00†	7168.22	-1233.63	-3939.65	7141.22	7168.22	-1348.84	-6854.89	-100.59	2917.52	155.20	18.88	PASS	
11825.00†	7167.93	-1236.02	-4039.62	7140.93	7167.93	-1348.84	-6854.89	-100.24	2817.53	155.25	18.23	PASS	
11925.00†	7167.64	-1238.41	-4139.59	7140.64	7167.64	-1348.84	-6854.89	-99.88	2717.55	155.30	17.57	PASS	
12025.00†	7167.34	-1240.81	-4239.56	7140.34	7167.34	-1348.84	-6854.89	-99.52	2617.56	155.36	16.92	PASS	
12125.00†	7167.05	-1243.20	-4339.53	7140.05	7167.05	-1348.84	-6854.89	-99.17	2517.58	155.42	16.27	PASS	
12225.00†	7166.76	-1245.59	-4439.50	7139.76	7166.76	-1348.84	-6854.89	-98.81	2417.60	155.48	15.62	PASS	
12325.00†	7166.47	-1247.98	-4539.47	7139.47	7166.47	-1348.84	-6854.89	-98.45	2317.61	155.55	14.96	PASS	
12425.00†	7166.18	-1250.37	-4639.45	7139.18	7166.18	-1348.84	-6854.89	-98.09	2217.64	155.63	14.31	PASS	
12525.00†	7165.89	-1252.76	-4739.42	7138.89	7165.89	-1348.84	-6854.89	-97.73	2117.66	155.71	13.66	PASS	
12625.00†	7165.60	-1255.15	-4839.39	7138.60	7165.60	-1348.84	-6854.89	-97.37	2017.68	155.79	13.01	PASS	
12725.00†	7165.30	-1257.54	-4939.36	7138.30	7165.30	-1348.84	-6854.89	-97.01	1917.71	155.89	12.35	PASS	
12825.00†	7165.01	-1259.93	-5039.33	7138.01	7165.01	-1348.84	-6854.89	-96.64	1817.74	156.00	11.70	PASS	
12925.00†	7164.72	-1262.32	-5139.30	7137.72	7164.72	-1348.84	-6854.89	-96.28	1717.77	156.12	11.05	PASS	
13025.00†	7164.43	-1264.71	-5239.27	7137.43	7164.43	-1348.84	-6854.89	-95.92	1617.81	156.25	10.40	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 8 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. BROWN 20-13 AWB Offset Wellpath: EX. BROWN 20-13 AWP

Facility: SEC.20-T06N-R66W		Slot: SLOT#04 EX. BROWN 20-13 (2179'FNL & 1796'FEL, PR, NB/CD)				Well: EX. BROWN 20-13		Threshold Value=1.00 † = interpolated/extrapolated station				
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status
13125.00†	7164.14	-1267.10	-5339.24	7137.14	7164.14	-1348.84	-6854.89	-95.55	1517.85	156.41	9.74	PASS
13225.00†	7163.85	-1269.50	-5439.21	7136.85	7163.85	-1348.84	-6854.89	-95.19	1417.90	156.59	9.09	PASS
13325.00†	7163.56	-1271.89	-5539.18	7136.56	7163.56	-1348.84	-6854.89	-94.83	1317.96	156.80	8.44	PASS
13425.00†	7163.26	-1274.28	-5639.16	7136.26	7163.26	-1348.84	-6854.89	-94.46	1218.02	157.06	7.79	PASS
13525.00†	7162.97	-1276.67	-5739.13	7135.97	7162.97	-1348.84	-6854.89	-94.10	1118.10	157.38	7.13	PASS
13625.00†	7162.68	-1279.06	-5839.10	7135.68	7162.68	-1348.84	-6854.89	-93.73	1018.19	157.79	6.48	PASS
13725.00†	7162.39	-1281.45	-5939.07	7135.39	7162.39	-1348.84	-6854.89	-93.36	918.30	158.33	5.82	PASS
13825.00†	7162.10	-1283.84	-6039.04	7135.10	7162.10	-1348.84	-6854.89	-93.00	818.44	159.05	5.16	PASS
13925.00†	7161.81	-1286.23	-6139.01	7134.81	7161.81	-1348.84	-6854.89	-92.63	718.62	160.07	4.51	PASS
14025.00†	7161.51	-1288.62	-6238.98	7134.51	7161.51	-1348.84	-6854.89	-92.27	618.85	161.57	3.84	PASS
14032.94	7161.49	-1288.81	-6246.92	7134.49	7161.49	-1348.84	-6854.89	-92.24	610.93	161.72	3.79	PASS
14125.00†	7161.22	-1288.79	-6338.97	7134.22	7161.22	-1348.84	-6854.89	-91.19	519.41	164.70	3.16	PASS
14211.94	7160.97	-1284.71	-6425.81	7133.97	7160.97	-1348.84	-6854.89	-90.75	433.85	171.38	2.54	PASS
14225.00†	7160.93	-1283.79	-6438.83	7133.93	7160.93	-1348.84	-6854.89	-90.73	421.11	172.91	2.44	PASS
14325.00†	7160.64	-1276.82	-6538.59	7133.64	7160.64	-1348.84	-6854.89	-90.55	324.40	190.58	1.70	PASS
14411.94	7160.39	-1270.75	-6625.32	7133.39	7160.39	-1348.84	-6854.89	-90.40	242.49	220.76	1.10	PASS
14425.00†	7160.35	-1269.89	-6638.35	7133.35	7160.35	-1348.84	-6854.89	-90.38	230.49	227.28	1.01	PASS
14525.00†	7160.06	-1266.21	-6738.27	7133.06	7160.06	-1348.84	-6854.89	-90.23	142.93	305.66	0.47	FAIL
14625.00†	7159.76	-1267.77	-6838.25	7132.76	7159.76	-1348.84	-6854.89	-90.04	82.77	447.97	0.18	FAIL
14645.13†	7159.70	-1268.71	-6858.35	7132.70	7159.70	-1348.84	-6854.89	-90.00	80.20	457.18	0.17	FAIL
14645.87†	7159.70	-1268.75	-6859.09	7132.61	7159.61	-1348.84	-6854.89	-89.94	80.20	457.12	0.17	FAIL
14725.00†	7159.47	-1274.55	-6938.00	7132.47	7159.47	-1348.84	-6854.89	-89.84	111.47	351.51	0.32	FAIL
14825.00†	7159.17	-1286.55	-7037.27	7132.17	7159.17	-1348.84	-6854.89	-89.67	192.72	239.67	0.80	FAIL
14925.00†	7158.88	-1303.73	-7135.77	7131.88	7158.88	-1348.84	-6854.89	-89.55	284.48	189.93	1.50	PASS
14937.60	7158.84	-1306.26	-7148.12	7131.84	7158.84	-1348.84	-6854.89	-89.54	296.30	185.87	1.60	PASS
15025.00†	7158.59	-1324.09	-7233.68	7131.59	7158.59	-1348.84	-6854.89	-89.40	379.59	167.26	2.27	PASS
15037.60	7158.55	-1326.66	-7246.02	7131.55	7158.55	-1348.84	-6854.89	-89.38	391.75	165.63	2.37	PASS
15125.00†	7158.30	-1342.52	-7331.95	7131.30	7158.30	-1348.84	-6854.89	-89.04	477.10	159.36	3.00	PASS
15225.00†	7158.01	-1355.83	-7431.05	7131.01	7158.01	-1348.84	-6854.89	-88.25	576.20	157.53	3.67	PASS
15325.00†	7157.72	-1363.93	-7530.71	7130.72	7157.72	-1348.84	-6854.89	-84.92	675.98	157.27	4.31	PASS
15417.62	7157.45	-1366.77	-7623.28	7130.45	7157.45	-1348.84	-6854.89	80.31	768.59	157.32	4.90	PASS
15425.00†	7157.43	-1366.82	-7630.66	7130.43	7157.43	-1348.84	-6854.89	80.22	775.97	157.33	4.95	PASS
15525.00†	7157.14	-1367.46	-7730.65	7130.14	7157.14	-1348.84	-6854.89	78.98	875.96	157.45	5.58	PASS
15625.00†	7156.85	-1368.11	-7830.65	7129.85	7156.85	-1348.84	-6854.89	77.76	975.95	157.56	6.22	PASS

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: EX. BROWN 20-13 AWB Offset Wellpath: EX. BROWN 20-13 AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 9 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

WELLPATH COMPOSITION - Offset Wellbore: **EX. BROWN 20-13 AWB** Offset Wellpath: **EX. BROWN 20-13 AWP**

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
0.00	7286.00	Drift Indicator - Inclination Only (Actual Survey)	ASSUMED VERTICAL TO TD FROM COGCC <7286>	EX. BROWN 20-13 AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: **EX. BROWN 20-13 AWB** Offset Wellpath: **EX. BROWN 20-13 AWP**

MD Reference: Rig on SLOT#04 BROWN 20-13 (2179'FNL & 1796'FEL, PR, NB/CD) (RT)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	4749.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 10 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. LEFFLER FARM #2-21 AWB Offset Wellpath: EX. LEFFLER FARM #2-21 AWB

Facility: SEC.21-T06N-R66W Slot: SLOT#1 EX. LEFFLER FARM #2-21 (1980'FNL & 1980'FEL, PA-CODL) Well: EX. LEFFLER FARM #2-21 Threshold Value=1.00 † = Interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	7.00	25.00	-1072.49	-1735.47	-121.72	2040.12	50.18	41.43	PASS	
125.00†	125.00	0.00	0.00	107.00	125.00	-1072.49	-1735.47	-121.72	2040.12	50.44	41.21	PASS	
225.00†	225.00	0.00	0.00	207.00	225.00	-1072.49	-1735.47	-121.72	2040.12	51.43	40.40	PASS	
300.00	300.00	0.00	0.00	282.00	300.00	-1072.49	-1735.47	-121.72	2040.12	52.68	39.43	PASS	
325.00†	325.00	-0.09	0.06	307.00	325.00	-1072.49	-1735.47	94.49	2040.13	53.14	39.09	PASS	
425.00†	424.96	-2.20	1.61	406.96	424.96	-1072.49	-1735.47	94.56	2040.34	55.43	37.44	PASS	
525.00†	524.77	-7.13	5.22	506.77	524.77	-1072.49	-1735.47	94.72	2040.83	58.18	35.65	PASS	
625.00†	624.30	-14.86	10.88	606.30	624.30	-1072.49	-1735.47	94.97	2041.65	61.29	33.83	PASS	
725.00†	723.44	-25.39	18.59	705.44	723.44	-1072.49	-1735.47	95.31	2042.83	64.66	32.05	PASS	
825.00†	822.07	-38.71	28.34	804.07	822.07	-1072.49	-1735.47	95.73	2044.44	68.23	30.38	PASS	
895.18	890.91	-49.71	36.39	872.91	890.91	-1072.49	-1735.47	96.08	2045.87	70.82	29.27	PASS	
925.00†	920.09	-54.67	40.02	902.09	920.09	-1072.49	-1735.47	96.25	2046.54	71.93	28.83	PASS	
1025.00†	1017.94	-71.32	52.20	999.94	1017.94	-1072.49	-1735.47	96.81	2048.94	75.75	27.38	PASS	
1125.00†	1115.79	-87.96	64.39	1097.79	1115.79	-1072.49	-1735.47	97.37	2051.54	79.68	26.05	PASS	
1225.00†	1213.64	-104.60	76.57	1195.64	1213.64	-1072.49	-1735.47	97.93	2054.34	83.68	24.82	PASS	
1325.00†	1311.48	-121.25	88.76	1293.48	1311.48	-1072.49	-1735.47	98.48	2057.35	87.76	23.69	PASS	
1425.00†	1409.33	-137.89	100.94	1391.33	1409.33	-1072.49	-1735.47	99.04	2060.55	91.89	22.65	PASS	
1525.00†	1507.18	-154.53	113.12	1489.18	1507.18	-1072.49	-1735.47	99.59	2063.96	96.06	21.69	PASS	
1625.00†	1605.03	-171.18	125.31	1587.03	1605.03	-1072.49	-1735.47	100.14	2067.57	100.28	20.81	PASS	
1725.00†	1702.88	-187.82	137.49	1684.88	1702.88	-1072.49	-1735.47	100.69	2071.38	104.53	19.99	PASS	
1825.00†	1800.73	-204.47	149.67	1782.73	1800.73	-1072.49	-1735.47	101.24	2075.39	108.52	19.24	PASS	
1925.00†	1898.58	-221.11	161.86	1880.58	1898.58	-1072.49	-1735.47	101.79	2079.59	112.77	18.55	PASS	
2025.00†	1996.43	-237.75	174.04	1978.43	1996.43	-1072.49	-1735.47	102.33	2083.99	117.05	17.91	PASS	
2125.00†	2094.28	-254.40	186.22	2076.28	2094.28	-1072.49	-1735.47	102.87	2088.59	121.36	17.31	PASS	
2225.00†	2192.13	-271.04	198.41	2174.13	2192.13	-1072.49	-1735.47	103.41	2093.37	125.70	16.74	PASS	
2325.00†	2289.98	-287.68	210.59	2271.98	2289.98	-1072.49	-1735.47	103.95	2098.35	130.06	16.22	PASS	
2425.00†	2387.83	-304.33	222.77	2369.83	2387.83	-1072.49	-1735.47	104.48	2103.52	134.44	15.72	PASS	
2525.00†	2485.68	-320.97	234.96	2467.68	2485.68	-1072.49	-1735.47	105.01	2108.88	138.85	15.26	PASS	
2625.00†	2583.53	-337.62	247.14	2565.53	2583.53	-1072.49	-1735.47	105.54	2114.43	143.28	14.83	PASS	
2725.00†	2681.38	-354.26	259.33	2663.38	2681.38	-1072.49	-1735.47	106.07	2120.16	147.73	14.42	PASS	
2825.00†	2779.23	-370.90	271.51	2761.23	2779.23	-1072.49	-1735.47	106.59	2126.08	152.20	14.03	PASS	
2925.00†	2877.08	-387.55	283.69	2859.08	2877.08	-1072.49	-1735.47	107.11	2132.18	156.68	13.67	PASS	
3025.00†	2974.93	-404.19	295.88	2956.93	2974.93	-1072.49	-1735.47	107.63	2138.46	161.18	13.32	PASS	
3125.00†	3072.78	-420.83	308.06	3054.78	3072.78	-1072.49	-1735.47	108.15	2144.92	165.70	13.00	PASS	
3225.00†	3170.63	-437.48	320.24	3152.63	3170.63	-1072.49	-1735.47	108.66	2151.56	170.24	12.69	PASS	
3325.00†	3268.48	-454.12	332.43	3250.48	3268.48	-1072.49	-1735.47	109.17	2158.38	174.79	12.39	PASS	
3425.00†	3366.33	-470.77	344.61	3348.33	3366.33	-1072.49	-1735.47	109.67	2165.37	179.35	12.12	PASS	
3525.00†	3464.18	-487.41	356.79	3446.18	3464.18	-1072.49	-1735.47	110.18	2172.53	183.93	11.85	PASS	
3625.00†	3562.03	-504.05	368.98	3544.03	3562.03	-1072.49	-1735.47	110.68	2179.87	188.52	11.60	PASS	
3725.00†	3659.88	-520.70	381.16	3641.88	3659.88	-1072.49	-1735.47	111.17	2187.38	193.12	11.36	PASS	
3825.00†	3757.73	-537.34	393.34	3739.73	3757.73	-1072.49	-1735.47	111.66	2195.05	197.74	11.14	PASS	
3925.00†	3855.57	-553.98	405.53	3837.57	3855.57	-1072.49	-1735.47	112.15	2202.89	202.37	10.92	PASS	
4025.00†	3953.42	-570.63	417.71	3935.42	3953.42	-1072.49	-1735.47	112.64	2210.90	207.00	10.71	PASS	
4125.00†	4051.27	-587.27	429.90	4033.27	4051.27	-1072.49	-1735.47	113.12	2219.07	211.65	10.52	PASS	
4225.00†	4149.12	-603.92	442.08	4131.12	4149.12	-1072.49	-1735.47	113.60	2227.40	216.31	10.33	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 11 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. LEFFLER FARM #2-21 AWB Offset Wellpath: EX. LEFFLER FARM #2-21 AWB

Facility: SEC.21-T06N-R66W		Slot: SLOT#1 EX. LEFFLER FARM #2-21 (1980'FNL & 1980'FEL, PA-CODL)		Well: EX. LEFFLER FARM #2-21		Threshold Value=1.00		† = interpolated/extrapolated station				
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status
4325.00†	4246.97	-620.56	454.26	4228.97	4246.97	-1072.49	-1735.47	114.08	2235.89	220.98	10.15	PASS
4425.00†	4344.82	-637.20	466.45	4326.82	4344.82	-1072.49	-1735.47	114.55	2244.53	225.66	9.97	PASS
4525.00†	4442.67	-653.85	478.63	4424.67	4442.67	-1072.49	-1735.47	115.02	2253.33	230.35	9.81	PASS
4625.00†	4540.52	-670.49	490.81	4522.52	4540.52	-1072.49	-1735.47	115.48	2262.29	235.04	9.65	PASS
4725.00†	4638.37	-687.13	503.00	4620.37	4638.37	-1072.49	-1735.47	115.94	2271.40	239.75	9.50	PASS
4825.00†	4736.22	-703.78	515.18	4718.22	4736.22	-1072.49	-1735.47	116.40	2280.66	244.46	9.35	PASS
4925.00†	4834.07	-720.42	527.36	4816.07	4834.07	-1072.49	-1735.47	116.86	2290.06	249.18	9.21	PASS
5025.00†	4931.92	-737.07	539.55	4913.92	4931.92	-1072.49	-1735.47	117.31	2299.62	253.91	9.08	PASS
5125.00†	5029.77	-753.71	551.73	5011.77	5029.77	-1072.49	-1735.47	117.75	2309.31	258.64	8.95	PASS
5225.00†	5127.62	-770.35	563.91	5109.62	5127.62	-1072.49	-1735.47	118.20	2319.15	263.38	8.83	PASS
5325.00†	5225.47	-787.00	576.10	5207.47	5225.47	-1072.49	-1735.47	118.64	2329.14	268.13	8.71	PASS
5425.00†	5323.32	-803.64	588.28	5305.32	5323.32	-1072.49	-1735.47	119.07	2339.26	272.88	8.59	PASS
5525.00†	5421.17	-820.28	600.47	5403.17	5421.17	-1072.49	-1735.47	119.51	2349.51	277.64	8.48	PASS
5625.00†	5519.02	-836.93	612.65	5501.02	5519.02	-1072.49	-1735.47	119.94	2359.91	282.41	8.37	PASS
5725.00†	5616.87	-853.57	624.83	5598.87	5616.87	-1072.49	-1735.47	120.36	2370.44	287.18	8.27	PASS
5825.00†	5714.72	-870.22	637.02	5696.72	5714.72	-1072.49	-1735.47	120.78	2381.10	291.96	8.17	PASS
5925.00†	5812.57	-886.86	649.20	5794.57	5812.57	-1072.49	-1735.47	121.20	2391.89	296.74	8.08	PASS
6025.00†	5910.42	-903.50	661.38	5892.42	5910.42	-1072.49	-1735.47	121.61	2402.81	301.53	7.99	PASS
6125.00†	6008.27	-920.15	673.57	5990.27	6008.27	-1072.49	-1735.47	122.02	2413.85	306.32	7.90	PASS
6225.00†	6106.12	-936.79	685.75	6088.12	6106.12	-1072.49	-1735.47	122.43	2425.02	311.12	7.81	PASS
6325.00†	6203.97	-953.43	697.93	6185.97	6203.97	-1072.49	-1735.47	122.83	2436.32	315.92	7.73	PASS
6425.00†	6301.82	-970.08	710.12	6283.82	6301.82	-1072.49	-1735.47	123.23	2447.73	320.72	7.65	PASS
6525.00†	6399.66	-986.72	722.30	6381.66	6399.66	-1072.49	-1735.47	123.63	2459.27	325.53	7.57	PASS
6605.93	6478.85	-1000.19	732.16	6460.85	6478.85	-1072.49	-1735.47	123.95	2468.69	329.42	7.51	PASS
6625.00†	6497.54	-1003.38	734.20	6479.54	6497.54	-1072.49	-1735.47	116.73	2470.64	330.34	7.49	PASS
6725.00†	6595.97	-1020.39	735.57	6577.97	6595.97	-1072.49	-1735.47	68.46	2471.59	335.31	7.38	PASS
6825.00†	6693.34	-1037.59	721.30	6675.34	6693.34	-1072.49	-1735.47	38.26	2457.02	340.70	7.22	PASS
6925.00†	6787.24	-1054.57	691.74	6769.24	6787.24	-1072.49	-1735.47	25.88	2427.28	345.98	7.03	PASS
7025.00†	6875.37	-1070.91	647.62	6857.37	6875.37	-1072.49	-1735.47	20.16	2383.09	350.77	6.81	PASS
7125.00†	6955.55	-1086.20	590.03	6937.55	6955.55	-1072.49	-1735.47	17.31	2325.54	355.02	6.56	PASS
7225.00†	7025.81	-1100.06	520.38	7007.81	7025.81	-1072.49	-1735.47	16.05	2256.03	358.65	6.30	PASS
7325.00†	7084.42	-1112.16	440.40	7066.42	7084.42	-1072.49	-1735.47	16.02	2176.23	361.61	6.03	PASS
7425.00†	7129.94	-1122.20	352.04	7111.94	7129.94	-1072.49	-1735.47	17.45	2088.11	363.86	5.75	PASS
7525.00†	7161.25	-1129.93	257.49	7143.25	7161.25	-1072.49	-1735.47	21.91	1993.80	365.37	5.47	PASS
7625.00†	7177.57	-1135.16	159.08	7159.57	7177.57	-1072.49	-1735.47	39.98	1895.59	366.15	5.19	PASS
7682.94	7180.00	-1136.99	101.24	7162.00	7180.00	-1072.49	-1735.47	92.82	1837.84	366.27	5.03	PASS
7725.00†	7179.88	-1138.00	59.19	7161.88	7179.88	-1072.49	-1735.47	92.76	1795.86	366.27	4.91	PASS
7825.00†	7179.59	-1140.39	-40.78	7161.59	7179.59	-1072.49	-1735.47	92.61	1696.05	366.27	4.64	PASS
7925.00†	7179.29	-1142.78	-140.75	7161.29	7179.29	-1072.49	-1735.47	92.45	1596.27	366.29	4.36	PASS
8025.00†	7179.00	-1145.17	-240.72	7161.00	7179.00	-1072.49	-1735.47	92.30	1496.52	366.31	4.09	PASS
8125.00†	7178.71	-1147.56	-340.69	7160.71	7178.71	-1072.49	-1735.47	92.14	1396.80	366.34	3.82	PASS
8225.00†	7178.42	-1149.95	-440.66	7160.42	7178.42	-1072.49	-1735.47	91.99	1297.13	366.40	3.55	PASS
8325.00†	7178.13	-1152.34	-540.63	7160.13	7178.13	-1072.49	-1735.47	91.84	1197.50	366.47	3.27	PASS
8425.00†	7177.84	-1154.73	-640.61	7159.84	7177.84	-1072.49	-1735.47	91.68	1097.95	366.57	3.00	PASS
8525.00†	7177.55	-1157.12	-740.58	7159.55	7177.55	-1072.49	-1735.47	91.53	998.49	366.72	2.73	PASS

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 12 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: **EX. LEFFLER FARM #2-21 AWB** Offset Wellpath: **EX. LEFFLER FARM #2-21 AWP**

Facility: SEC.21-T06N-R66W Slot: SLOT#1 EX. LEFFLER FARM #2-21 (1980'FNL & 1980'FEL, PA-CODL) Well: EX. LEFFLER FARM #2-21 Threshold Value=1.00 † = Interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
8625.00†	7177.25	-1159.52	-840.55	7159.25	7177.25	-1072.49	-1735.47	91.38	899.15	366.94	2.45	PASS	
8725.00†	7176.96	-1161.91	-940.52	7158.96	7176.96	-1072.49	-1735.47	91.22	799.97	367.27	2.18	PASS	
8825.00†	7176.67	-1164.30	-1040.49	7158.67	7176.67	-1072.49	-1735.47	91.07	701.02	367.76	1.91	PASS	
8925.00†	7176.38	-1166.69	-1140.46	7158.38	7176.38	-1072.49	-1735.47	90.91	602.42	368.56	1.64	PASS	
9025.00†	7176.09	-1169.08	-1240.43	7158.09	7176.09	-1072.49	-1735.47	90.76	504.38	369.89	1.36	PASS	
9125.00†	7175.80	-1171.47	-1340.40	7157.80	7175.80	-1072.49	-1735.47	90.61	407.28	372.31	1.09	PASS	
9225.00†	7175.51	-1173.86	-1440.37	7157.51	7175.51	-1072.49	-1735.47	90.45	312.03	377.11	0.83	FAIL	
9325.00†	7175.21	-1176.25	-1540.34	7157.21	7175.21	-1072.49	-1735.47	90.30	221.00	387.72	0.57	FAIL	
9425.00†	7174.92	-1178.64	-1640.32	7156.92	7174.92	-1072.49	-1735.47	90.14	142.56	412.30	0.34	FAIL	
9517.57†	7174.65	-1180.86	-1732.85	7156.57	7174.57	-1072.49	-1735.47	89.96	108.40	438.36	0.25	FAIL	
9518.48†	7174.65	-1180.88	-1733.76	7156.65	7174.65	-1072.49	-1735.47	90.00	108.40	438.40	0.25	FAIL	
9525.00†	7174.63	-1181.03	-1740.29	7156.63	7174.63	-1072.49	-1735.47	89.99	108.65	438.43	0.25	FAIL	
9625.00†	7174.34	-1183.42	-1840.26	7156.34	7174.34	-1072.49	-1735.47	89.84	152.60	413.23	0.37	FAIL	
9725.00†	7174.05	-1185.82	-1940.23	7156.05	7174.05	-1072.49	-1735.47	89.68	234.02	391.85	0.60	FAIL	
9825.00†	7173.76	-1188.21	-2040.20	7155.76	7173.76	-1072.49	-1735.47	89.53	325.96	381.82	0.85	FAIL	
9925.00†	7173.47	-1190.60	-2140.17	7155.47	7173.47	-1072.49	-1735.47	89.37	421.58	376.77	1.12	PASS	
10025.00†	7173.17	-1192.99	-2240.14	7155.17	7173.17	-1072.49	-1735.47	89.22	518.85	373.93	1.39	PASS	
10125.00†	7172.88	-1195.38	-2340.11	7154.88	7172.88	-1072.49	-1735.47	89.06	617.00	372.18	1.66	PASS	
10225.00†	7172.59	-1197.77	-2440.08	7154.59	7172.59	-1072.49	-1735.47	88.91	715.66	371.04	1.93	PASS	
10325.00†	7172.30	-1200.16	-2540.05	7154.30	7172.30	-1072.49	-1735.47	88.76	814.65	370.25	2.20	PASS	
10425.00†	7172.01	-1202.55	-2640.03	7154.01	7172.01	-1072.49	-1735.47	88.60	913.85	369.68	2.47	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: **EX. LEFFLER FARM #2-21 AWB** Offset Wellpath: **EX. LEFFLER FARM #2-21 AWP**

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

WELLPATH COMPOSITION - Offset Wellbore: **EX. LEFFLER FARM #2-21 AWB** Offset Wellpath: **EX. LEFFLER FARM #2-21 AWP**

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
0.00	7325.00	Drift Indicator - Inclination Only (Actual Survey)	ASSUMED VERTICAL TO TD FROM COGCC <7325>	EX. LEFFLER FARM #2-21 AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: **EX. LEFFLER FARM #2-21 AWB** Offset Wellpath: **EX. LEFFLER FARM #2-21 AWP**

MD Reference: Rig on LEFFLER FARNS #2-21 (1980'FNL & 1980'FEL, PA-CODL) (RT)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	0.00ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 13 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DONN 5N-20C-L PWB Offset Wellpath: DONN 5N-20C-L PWP (REV-B.0)

Facility: SEC.21-T06N-R66W Slot: SLOT#22 DONN 5N-20C-L (918'FNL & 252'FEL, SEC.21) Well: DONN 5N-20C-L Threshold Value=1.00 † = Interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	26.00	25.00	20.04	0.00	0.00	20.04	1.57	31.70	PASS	
125.00†	125.00	0.00	0.00	126.00	125.00	20.04	0.00	0.00	20.04	1.89	20.55	PASS	
225.00†	225.00	0.00	0.00	226.00	225.00	20.04	0.00	0.00	20.04	2.46	12.71	PASS	
300.00	300.00	0.00	0.00	301.01	300.01	20.04	0.00	0.00	20.04	2.91	9.79	PASS	
325.00†	325.00	-0.09	0.06	326.14	325.14	19.95	0.08	-143.76	20.04	3.06	9.08	PASS	
425.00†	424.96	-2.20	1.61	426.66	425.62	17.93	1.85	-143.15	20.14	4.03	6.26	PASS	
525.00†	524.77	-7.13	5.22	527.19	525.95	13.27	5.93	-141.85	20.44	5.46	4.33	PASS	
625.00†	624.30	-14.86	10.88	627.71	625.99	5.96	12.34	-139.93	20.94	6.54	3.58	PASS	
725.00†	723.44	-25.39	18.59	728.21	725.62	-3.99	21.05	-137.49	21.66	7.43	3.20	PASS	
825.00†	822.07	-38.71	28.34	828.71	824.72	-16.55	32.07	-134.64	22.63	8.18	3.00	PASS	
895.18	890.91	-49.71	36.39	898.95	893.70	-26.47	40.76	-133.54	23.81	8.60	2.99	PASS	
925.00†	920.09	-54.67	40.02	928.76	922.98	-30.70	44.46	-133.70	24.56	8.78	3.02	PASS	
1025.00†	1017.94	-71.32	52.20	1028.73	1021.16	-44.85	56.87	-134.20	27.06	9.37	3.11	PASS	
1125.00†	1115.79	-87.96	64.39	1128.70	1119.34	-59.01	69.28	-134.61	29.57	9.98	3.17	PASS	
1225.00†	1213.64	-104.60	76.57	1228.67	1217.52	-73.17	81.69	-134.95	32.08	10.61	3.22	PASS	
1325.00†	1311.48	-121.25	88.76	1328.64	1315.70	-87.33	94.10	-135.25	34.59	11.26	3.27	PASS	
1425.00†	1409.33	-137.89	100.94	1428.60	1413.88	-101.49	106.51	-135.50	37.10	11.92	3.30	PASS	
1525.00†	1507.18	-154.53	113.12	1528.57	1512.06	-115.65	118.92	-135.73	39.61	12.58	3.33	PASS	
1625.00†	1605.03	-171.18	125.31	1628.54	1610.24	-129.81	131.33	-135.92	42.13	13.27	3.34	PASS	
1725.00†	1702.88	-187.82	137.49	1728.51	1708.42	-143.97	143.74	-136.10	44.64	13.95	3.36	PASS	
1825.00†	1800.73	-204.47	149.67	1828.48	1806.60	-158.13	156.15	-136.25	47.15	14.10	3.47	PASS	
1925.00†	1898.58	-221.11	161.86	1928.45	1904.78	-172.29	168.56	-136.38	49.67	14.31	3.60	PASS	
2025.00†	1996.43	-237.75	174.04	2028.41	2002.96	-186.45	180.97	-136.52	52.18	14.60	3.70	PASS	
2125.00†	2094.28	-254.40	186.22	2128.38	2101.13	-200.61	193.38	-136.63	54.69	14.98	3.78	PASS	
2225.00†	2192.13	-271.04	198.41	2228.35	2199.31	-214.77	205.79	-136.74	57.21	15.45	3.83	PASS	
2325.00†	2289.98	-287.68	210.59	2328.32	2297.49	-228.93	218.20	-136.83	59.72	15.98	3.86	PASS	
2425.00†	2387.83	-304.33	222.77	2428.29	2395.67	-243.09	230.61	-136.92	62.24	16.58	3.88	PASS	
2525.00†	2485.68	-320.97	234.96	2528.26	2493.85	-257.25	243.02	-137.00	64.75	17.24	3.87	PASS	
2625.00†	2583.53	-337.62	247.14	2628.22	2592.03	-271.41	255.43	-137.08	67.27	17.95	3.86	PASS	
2725.00†	2681.38	-354.26	259.33	2728.19	2690.21	-285.56	267.84	-137.15	69.78	18.71	3.84	PASS	
2825.00†	2779.23	-370.90	271.51	2828.16	2788.39	-299.72	280.25	-137.21	72.30	19.51	3.81	PASS	
2925.00†	2877.08	-387.55	283.69	2928.13	2886.57	-313.88	292.66	-137.27	74.81	20.34	3.77	PASS	
3025.00†	2974.93	-404.19	295.88	3028.10	2984.75	-328.04	305.07	-137.33	77.33	21.21	3.74	PASS	
3125.00†	3072.78	-420.83	308.06	3128.07	3082.93	-342.20	317.47	-137.38	79.84	22.10	3.70	PASS	
3225.00†	3170.63	-437.48	320.24	3228.03	3181.11	-356.36	329.88	-137.43	82.36	23.01	3.66	PASS	
3325.00†	3268.48	-454.12	332.43	3328.00	3279.29	-370.52	342.29	-137.48	84.87	23.95	3.62	PASS	
3425.00†	3366.33	-470.77	344.61	3427.97	3377.47	-384.68	354.70	-137.52	87.39	24.90	3.58	PASS	
3525.00†	3464.18	-487.41	356.79	3527.94	3475.65	-398.84	367.11	-137.57	89.90	25.88	3.54	PASS	
3625.00†	3562.03	-504.05	368.98	3627.91	3573.82	-413.00	379.52	-137.60	92.42	26.86	3.51	PASS	
3725.00†	3659.88	-520.70	381.16	3727.88	3672.00	-427.16	391.93	-137.64	94.93	27.86	3.47	PASS	
3825.00†	3757.73	-537.34	393.34	3827.84	3770.18	-441.32	404.34	-137.68	97.45	28.87	3.43	PASS	
3925.00†	3855.57	-553.98	405.53	3927.81	3868.36	-455.48	416.75	-137.71	99.97	29.90	3.40	PASS	
4025.00†	3953.42	-570.63	417.71	4027.78	3966.54	-469.64	429.16	-137.74	102.48	30.93	3.37	PASS	
4125.00†	4051.27	-587.27	429.90	4127.75	4064.72	-483.80	441.57	-137.77	105.00	31.97	3.34	PASS	
4225.00†	4149.12	-603.92	442.08	4227.72	4162.90	-497.96	453.98	-137.80	107.51	33.02	3.31	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 14 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DONN 5N-20C-L PWB Offset Wellpath: DONN 5N-20C-L PWP (REV-B.0)

Facility: SEC.21-T06N-R66W Slot: SLOT#22 DONN 5N-20C-L (918'FNL & 252'FEL, SEC.21) Well: DONN 5N-20C-L Threshold Value=1.00 † = Interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
4325.00†	4246.97	-620.56	454.26	4327.69	4261.08	-512.12	466.39	-137.83	110.03	34.07	3.28	PASS	
4425.00†	4344.82	-637.20	466.45	4427.65	4359.26	-526.27	478.80	-137.86	112.54	35.13	3.25	PASS	
4525.00†	4442.67	-653.85	478.63	4527.62	4457.44	-540.43	491.21	-137.88	115.06	36.20	3.22	PASS	
4625.00†	4540.52	-670.49	490.81	4627.59	4555.62	-554.59	503.62	-137.91	117.58	37.27	3.20	PASS	
4725.00†	4638.37	-687.13	503.00	4727.56	4653.80	-568.75	516.03	-137.93	120.09	38.35	3.17	PASS	
4825.00†	4736.22	-703.78	515.18	4827.53	4751.98	-582.91	528.44	-137.95	122.61	39.43	3.15	PASS	
4925.00†	4834.07	-720.42	527.36	4927.50	4850.16	-597.07	540.85	-137.97	125.12	40.52	3.13	PASS	
5025.00†	4931.92	-737.07	539.55	5027.46	4948.34	-611.23	553.26	-137.99	127.64	41.61	3.10	PASS	
5125.00†	5029.77	-753.71	551.73	5127.43	5046.51	-625.39	565.67	-138.01	130.15	42.70	3.08	PASS	
5225.00†	5127.62	-770.35	563.91	5227.40	5144.69	-639.55	578.08	-138.03	132.67	43.80	3.06	PASS	
5325.00†	5225.47	-787.00	576.10	5327.37	5242.87	-653.71	590.49	-138.05	135.19	44.90	3.04	PASS	
5425.00†	5323.32	-803.64	588.28	5427.34	5341.06	-667.87	602.90	-138.07	137.70	46.00	3.02	PASS	
5525.00†	5421.17	-820.28	600.47	5527.31	5439.23	-682.03	615.31	-138.09	140.22	47.10	3.01	PASS	
5625.00†	5519.02	-836.93	612.65	5627.28	5537.41	-696.19	627.72	-138.10	142.73	48.21	2.99	PASS	
5725.00†	5616.87	-853.57	624.83	5727.24	5635.59	-710.35	640.13	-138.12	145.25	49.32	2.97	PASS	
5825.00†	5714.72	-870.22	637.02	5827.21	5733.77	-724.51	652.53	-138.13	147.77	50.43	2.96	PASS	
5925.00†	5812.57	-886.86	649.20	5927.18	5831.95	-738.67	664.94	-138.15	150.28	51.54	2.94	PASS	
6025.00†	5910.42	-903.50	661.38	6027.15	5930.13	-752.83	677.35	-138.16	152.80	52.66	2.93	PASS	
6125.00†	6008.27	-920.15	673.57	6127.12	6028.31	-766.99	689.76	-138.18	155.31	53.78	2.91	PASS	
6225.00†	6106.12	-936.79	685.75	6227.09	6126.49	-781.14	702.17	-138.19	157.83	54.89	2.90	PASS	
6325.00†	6203.97	-953.43	697.93	6327.05	6224.67	-795.30	714.58	-138.20	160.35	56.01	2.89	PASS	
6425.00†	6301.82	-970.08	710.12	6427.02	6322.85	-809.46	726.99	-138.22	162.86	57.14	2.87	PASS	
6525.00†	6399.66	-986.72	722.30	6527.00	6422.92	-823.96	737.43	-138.98	165.11	58.21	2.86	PASS	
6605.93	6478.85	-1000.19	732.16	6610.67	6503.90	-836.01	735.56	-143.10	166.12	58.85	2.84	PASS	
6625.00†	6497.54	-1003.38	734.20	6629.51	6522.43	-838.81	733.64	-151.77	166.44	58.99	2.84	PASS	
6725.00†	6595.97	-1020.39	735.57	6726.48	6616.41	-853.29	715.07	152.53	169.58	59.99	2.85	PASS	
6825.00†	6693.34	-1037.59	721.30	6820.64	6703.90	-867.20	683.44	115.42	174.86	61.24	2.88	PASS	
6925.00†	6787.24	-1054.57	691.74	6912.34	6783.72	-880.33	640.41	96.80	181.68	62.41	2.93	PASS	
7025.00†	6875.37	-1070.91	647.62	7001.92	6854.96	-892.48	587.59	85.57	189.36	63.33	3.01	PASS	
7125.00†	6955.55	-1086.20	590.03	7089.72	6916.95	-903.51	526.50	77.89	197.23	64.05	3.10	PASS	
7225.00†	7025.81	-1100.06	520.38	7176.04	6969.18	-913.30	458.57	72.35	204.71	65.00	3.17	PASS	
7325.00†	7084.42	-1112.16	440.40	7261.15	7011.29	-921.77	385.16	68.30	211.30	66.12	3.22	PASS	
7425.00†	7129.94	-1122.20	352.04	7345.34	7043.02	-928.82	307.57	65.41	216.63	68.41	3.19	PASS	
7525.00†	7161.25	-1129.93	257.49	7428.85	7064.20	-934.40	227.05	63.48	220.40	71.18	3.12	PASS	
7625.00†	7177.57	-1135.16	159.08	7511.92	7074.74	-938.46	144.81	62.41	222.42	74.68	3.00	PASS	
7682.94	7180.00	-1136.99	101.24	7560.91	7075.97	-940.13	95.87	62.16	222.73	76.93	2.91	PASS	
7725.00†	7179.88	-1138.00	59.19	7602.97	7075.78	-941.37	53.83	62.11	222.54	78.83	2.84	PASS	
7825.00†	7179.59	-1140.39	-40.78	7702.97	7075.33	-944.34	-46.12	62.01	222.11	83.69	2.67	PASS	
7925.00†	7179.29	-1142.78	-140.75	7802.97	7074.87	-947.31	-146.08	61.90	221.68	89.03	2.50	PASS	
8025.00†	7179.00	-1145.17	-240.72	7902.96	7074.42	-950.27	-246.03	61.79	221.25	94.76	2.34	PASS	
8125.00†	7178.71	-1147.56	-340.69	8002.96	7073.96	-953.24	-345.98	61.68	220.82	100.83	2.20	PASS	
8225.00†	7178.42	-1149.95	-440.66	8102.96	7073.50	-956.21	-445.94	61.57	220.39	107.16	2.06	PASS	
8325.00†	7178.13	-1152.34	-540.63	8202.96	7073.05	-959.17	-545.89	61.46	219.96	113.71	1.94	PASS	
8425.00†	7177.84	-1154.73	-640.61	8302.96	7072.59	-962.14	-645.84	61.36	219.54	120.43	1.83	PASS	
8525.00†	7177.55	-1157.12	-740.58	8402.96	7072.14	-965.11	-745.80	61.25	219.11	127.31	1.73	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 15 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DONN 5N-20C-L PWB Offset Wellpath: DONN 5N-20C-L PWP (REV-B.0)

Facility: SEC.21-T06N-R66W Slot: SLOT#22 DONN 5N-20C-L (918'FNL & 252'FEL, SEC.21) Well: DONN 5N-20C-L Threshold Value=1.00 † = Interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
8625.00†	7177.25	-1159.52	-840.55	8502.95	7071.68	-968.07	-845.75	61.14	218.68	134.31	1.63	PASS	
8725.00†	7176.96	-1161.91	-940.52	8602.95	7071.23	-971.04	-945.70	61.02	218.26	141.40	1.55	PASS	
8825.00†	7176.67	-1164.30	-1040.49	8702.95	7070.77	-974.01	-1045.65	60.91	217.84	148.58	1.47	PASS	
8925.00†	7176.38	-1166.69	-1140.46	8802.95	7070.32	-976.97	-1145.61	60.80	217.41	155.83	1.40	PASS	
9025.00†	7176.09	-1169.08	-1240.43	8902.95	7069.86	-979.94	-1245.56	60.69	216.99	163.14	1.33	PASS	
9125.00†	7175.80	-1171.47	-1340.40	9002.94	7069.41	-982.91	-1345.51	60.58	216.57	170.49	1.27	PASS	
9225.00†	7175.51	-1173.86	-1440.37	9102.94	7068.95	-985.87	-1445.47	60.46	216.15	177.89	1.22	PASS	
9325.00†	7175.21	-1176.25	-1540.34	9202.94	7068.49	-988.84	-1545.42	60.35	215.73	185.30	1.16	PASS	
9425.00†	7174.92	-1178.64	-1640.32	9302.94	7068.04	-991.81	-1645.37	60.24	215.31	192.75	1.12	PASS	
9525.00†	7174.63	-1181.03	-1740.29	9402.94	7067.58	-994.77	-1745.33	60.12	214.89	200.22	1.07	PASS	
9625.00†	7174.34	-1183.42	-1840.26	9502.94	7067.13	-997.74	-1845.28	60.01	214.47	207.70	1.03	PASS	
9725.00†	7174.05	-1185.82	-1940.23	9602.93	7066.67	-1000.70	-1945.23	59.89	214.06	215.20	0.99	FAIL	
9825.00†	7173.76	-1188.21	-2040.20	9702.93	7066.22	-1003.67	-2045.19	59.78	213.64	222.70	0.96	FAIL	
9925.00†	7173.47	-1190.60	-2140.17	9802.93	7065.76	-1006.64	-2145.14	59.66	213.23	230.21	0.93	FAIL	
10025.00†	7173.17	-1192.99	-2240.14	9902.93	7065.31	-1009.60	-2245.09	59.55	212.81	237.72	0.89	FAIL	
10125.00†	7172.88	-1195.38	-2340.11	10002.93	7064.85	-1012.57	-2345.05	59.43	212.40	245.24	0.87	FAIL	
10225.00†	7172.59	-1197.77	-2440.08	10102.93	7064.39	-1015.54	-2445.00	59.31	211.99	252.75	0.84	FAIL	
10325.00†	7172.30	-1200.16	-2540.05	10202.92	7063.94	-1018.50	-2544.95	59.19	211.58	260.26	0.81	FAIL	
10425.00†	7172.01	-1202.55	-2640.03	10302.92	7063.48	-1021.47	-2644.91	59.08	211.17	267.76	0.79	FAIL	
10525.00†	7171.72	-1204.94	-2740.00	10402.92	7063.03	-1024.44	-2744.86	58.96	210.76	275.26	0.77	FAIL	
10625.00†	7171.42	-1207.33	-2839.97	10502.92	7062.57	-1027.40	-2844.81	58.84	210.35	282.75	0.74	FAIL	
10725.00†	7171.13	-1209.72	-2939.94	10602.92	7062.12	-1030.37	-2944.76	58.72	209.94	290.23	0.72	FAIL	
10825.00†	7170.84	-1212.11	-3039.91	10702.91	7061.66	-1033.34	-3044.72	58.60	209.54	297.71	0.70	FAIL	
10925.00†	7170.55	-1214.51	-3139.88	10802.91	7061.21	-1036.30	-3144.67	58.48	209.13	305.17	0.68	FAIL	
11025.00†	7170.26	-1216.90	-3239.85	10902.91	7060.75	-1039.27	-3244.62	58.36	208.73	312.62	0.67	FAIL	
11125.00†	7169.97	-1219.29	-3339.82	11002.91	7060.29	-1042.24	-3344.58	58.23	208.32	320.05	0.65	FAIL	
11225.00†	7169.68	-1221.68	-3439.79	11102.91	7059.84	-1045.20	-3444.53	58.11	207.92	327.47	0.63	FAIL	
11325.00†	7169.38	-1224.07	-3539.76	11202.91	7059.38	-1048.17	-3544.48	57.99	207.52	334.88	0.62	FAIL	
11425.00†	7169.09	-1226.46	-3639.74	11302.90	7058.93	-1051.14	-3644.44	57.87	207.12	342.27	0.60	FAIL	
11525.00†	7168.80	-1228.85	-3739.71	11402.90	7058.47	-1054.10	-3744.39	57.74	206.72	349.65	0.59	FAIL	
11625.00†	7168.51	-1231.24	-3839.68	11502.90	7058.02	-1057.07	-3844.34	57.62	206.32	357.01	0.58	FAIL	
11725.00†	7168.22	-1233.63	-3939.65	11602.90	7057.56	-1060.04	-3944.30	57.50	205.92	364.35	0.56	FAIL	
11825.00†	7167.93	-1236.02	-4039.62	11702.90	7057.11	-1063.00	-4044.25	57.37	205.52	371.68	0.55	FAIL	
11925.00†	7167.64	-1238.41	-4139.59	11802.89	7056.65	-1065.97	-4144.20	57.25	205.13	378.98	0.54	FAIL	
12025.00†	7167.34	-1240.81	-4239.56	11902.89	7056.20	-1068.94	-4244.16	57.12	204.73	386.27	0.53	FAIL	
12125.00†	7167.05	-1243.20	-4339.53	12002.89	7055.74	-1071.90	-4344.11	56.99	204.34	393.54	0.52	FAIL	
12225.00†	7166.76	-1245.59	-4439.50	12102.89	7055.28	-1074.87	-4444.06	56.87	203.94	400.79	0.51	FAIL	
12325.00†	7166.47	-1247.98	-4539.47	12202.89	7054.83	-1077.83	-4544.02	56.74	203.55	408.02	0.50	FAIL	
12425.00†	7166.18	-1250.37	-4639.45	12302.89	7054.37	-1080.80	-4643.97	56.61	203.16	415.22	0.49	FAIL	
12525.00†	7165.89	-1252.76	-4739.42	12402.88	7053.92	-1083.77	-4743.92	56.48	202.77	422.41	0.48	FAIL	
12625.00†	7165.60	-1255.15	-4839.39	12502.88	7053.46	-1086.73	-4843.87	56.35	202.38	429.58	0.47	FAIL	
12725.00†	7165.30	-1257.54	-4939.36	12602.88	7053.01	-1089.70	-4943.83	56.22	201.99	436.72	0.46	FAIL	
12825.00†	7165.01	-1259.93	-5039.33	12702.88	7052.55	-1092.67	-5043.78	56.10	201.61	443.84	0.45	FAIL	
12925.00†	7164.72	-1262.32	-5139.30	12802.88	7052.10	-1095.63	-5143.73	55.96	201.22	450.94	0.45	FAIL	
13025.00†	7164.43	-1264.71	-5239.27	12899.05	7051.66	-1097.98	-5239.88	55.92	201.29	458.22	0.44	FAIL	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 16 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DONN 5N-20C-L PWB Offset Wellpath: DONN 5N-20C-L PWP (REV-B.0)

Facility: SEC.21-T06N-R66W Slot: SLOT#22 DONN 5N-20C-L (918'FNL & 252'FEL, SEC.21) Well: DONN 5N-20C-L Threshold Value=1.00 † = Interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
13125.00†	7164.14	-1267.10	-5339.24	12990.86	7051.24	-1096.40	-5331.67	56.48	204.81	467.71	0.44	FAIL	
13225.00†	7163.85	-1269.50	-5439.21	13082.10	7050.82	-1090.45	-5422.69	57.66	212.38	479.44	0.44	FAIL	
13325.00†	7163.56	-1271.89	-5539.18	13172.36	7050.41	-1080.30	-5512.37	59.32	224.12	492.44	0.45	FAIL	
13425.00†	7163.26	-1274.28	-5639.16	13263.03	7049.99	-1065.92	-5601.89	61.33	240.06	506.40	0.47	FAIL	
13525.00†	7162.97	-1276.67	-5739.13	13361.07	7049.55	-1048.90	-5698.44	63.40	257.68	523.07	0.49	FAIL	
13625.00†	7162.68	-1279.06	-5839.10	13461.21	7049.09	-1031.58	-5797.07	65.22	275.53	539.31	0.51	FAIL	
13725.00†	7162.39	-1281.45	-5939.07	13575.43	7048.57	-1016.06	-5910.21	66.71	290.20	558.26	0.52	FAIL	
13825.00†	7162.10	-1283.84	-6039.04	13691.47	7048.04	-1007.25	-6025.90	67.55	299.47	573.39	0.52	FAIL	
13925.00†	7161.81	-1286.23	-6139.01	13808.49	7047.50	-1005.50	-6142.89	67.85	303.13	584.78	0.52	FAIL	
14025.00†	7161.51	-1288.62	-6238.98	13908.99	7047.05	-1007.26	-6243.37	67.86	303.79	593.43	0.51	FAIL	
14032.94	7161.49	-1288.81	-6246.92	13916.93	7047.01	-1007.39	-6251.31	67.86	303.85	594.11	0.51	FAIL	
14125.00†	7161.22	-1288.79	-6338.97	14008.97	7046.59	-1009.00	-6343.33	67.71	302.40	601.44	0.50	FAIL	
14211.94	7160.97	-1284.71	-6425.81	14095.72	7046.19	-1010.51	-6430.07	67.23	297.28	607.14	0.49	FAIL	
14225.00†	7160.93	-1283.79	-6438.83	14108.73	7046.14	-1010.74	-6443.08	67.14	296.23	607.89	0.49	FAIL	
14325.00†	7160.64	-1276.82	-6538.59	14208.35	7045.68	-1012.48	-6542.68	66.44	288.28	613.46	0.47	FAIL	
14411.94	7160.39	-1270.75	-6625.32	14294.96	7045.29	-1013.99	-6629.28	65.79	281.41	618.03	0.45	FAIL	
14425.00†	7160.35	-1269.89	-6638.35	14307.97	7045.23	-1014.22	-6642.29	65.71	280.42	618.71	0.45	FAIL	
14525.00†	7160.06	-1266.21	-6738.27	14407.81	7044.77	-1015.96	-6742.11	65.27	275.55	624.91	0.44	FAIL	
14625.00†	7159.76	-1267.77	-6838.25	14507.80	7044.32	-1017.71	-6842.08	65.21	275.45	633.12	0.43	FAIL	
14725.00†	7159.47	-1274.55	-6938.00	14607.66	7043.86	-1019.45	-6941.93	65.55	280.10	643.40	0.43	FAIL	
14825.00†	7159.17	-1286.55	-7037.27	14707.12	7043.41	-1021.18	-7041.37	66.23	289.55	655.50	0.44	FAIL	
14925.00†	7158.88	-1303.73	-7135.77	14805.91	7042.96	-1022.91	-7140.14	67.20	303.84	668.94	0.45	FAIL	
14937.60	7158.84	-1306.26	-7148.12	14818.30	7042.90	-1023.12	-7152.53	67.34	305.98	670.69	0.46	FAIL	
15025.00†	7158.59	-1324.09	-7233.68	14904.16	7042.51	-1024.62	-7238.37	68.44	321.21	682.62	0.47	FAIL	
15037.60	7158.55	-1326.66	-7246.02	14916.54	7042.46	-1024.84	-7250.75	68.58	323.41	684.29	0.47	FAIL	
15125.00†	7158.30	-1342.52	-7331.95	15002.74	7042.06	-1026.34	-7336.94	69.60	336.90	695.20	0.48	FAIL	
15225.00†	7158.01	-1355.83	-7431.05	15102.05	7041.61	-1028.08	-7436.24	70.36	347.84	706.34	0.49	FAIL	
15325.00†	7157.72	-1363.93	-7530.71	15201.84	7041.16	-1029.82	-7536.01	70.75	353.90	716.30	0.49	FAIL	
15417.62	7157.45	-1366.77	-7623.28	15294.44	7040.73	-1031.43	-7628.60	70.81	355.11	724.56	0.49	FAIL	
15425.00†	7157.43	-1366.82	-7630.66	15301.82	7040.70	-1031.56	-7635.98	70.81	355.04	725.18	0.49	FAIL	
15525.00†	7157.14	-1367.46	-7730.65	15401.82	7040.25	-1033.31	-7735.95	70.72	354.05	733.57	0.48	FAIL	
15625.00†	7156.85	-1368.11	-7830.65	15501.81	7039.79	-1035.05	-7835.93	70.64	353.07	741.96	0.48	FAIL	
15725.00†	7156.56	-1368.75	-7930.65	15601.80	7039.33	-1036.80	-7935.91	70.55	352.09	750.33	0.47	FAIL	
15825.00†	7156.27	-1369.40	-8030.65	15701.80	7038.88	-1038.54	-8035.89	70.47	351.10	758.69	0.46	FAIL	
15925.00†	7155.98	-1370.04	-8130.64	15801.79	7038.42	-1040.29	-8135.86	70.38	350.12	767.04	0.46	FAIL	
16025.00†	7155.70	-1370.69	-8230.64	15901.78	7037.97	-1042.03	-8235.84	70.30	349.14	775.38	0.45	FAIL	
16125.00†	7155.41	-1371.33	-8330.64	16001.78	7037.51	-1043.78	-8335.82	70.21	348.16	783.71	0.44	FAIL	
16225.00†	7155.12	-1371.98	-8430.64	16101.77	7037.06	-1045.52	-8435.80	70.12	347.19	792.02	0.44	FAIL	
16325.00†	7154.83	-1372.62	-8530.63	16202.11	7036.52	-1050.65	-8554.00	69.84	343.82	799.27	0.43	FAIL	
16425.00†	7154.54	-1373.27	-8630.63	16321.41	7036.06	-1058.62	-8654.98	69.39	337.10	805.60	0.42	FAIL	
16525.00†	7154.25	-1373.91	-8730.63	16421.14	7035.61	-1066.49	-8754.41	68.92	330.39	811.89	0.41	FAIL	
16625.00†	7153.97	-1374.56	-8830.63	16520.88	7035.15	-1074.35	-8853.83	68.43	323.70	817.98	0.40	FAIL	
16725.00†	7153.68	-1375.20	-8930.62	16620.62	7034.70	-1082.22	-8953.26	67.92	317.03	823.85	0.38	FAIL	
16825.00†	7153.39	-1375.85	-9030.62	16720.35	7034.25	-1090.08	-9052.69	67.39	310.39	829.49	0.37	FAIL	
16925.00†	7153.10	-1376.49	-9130.62	16820.09	7033.79	-1097.95	-9152.11	66.83	303.78	834.88	0.36	FAIL	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 17 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DONN 5N-20C-L PWB Offset Wellpath: DONN 5N-20C-L PWP (REV-B.0)

Facility: SEC.21-T06N-R66W Slot: SLOT#22 DONN 5N-20C-L (918'FNL & 252'FEL, SEC.21) Well: DONN 5N-20C-L Threshold Value=1.00 † = Interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
17025.00†	7152.81	-1377.14	-9230.62	16919.83	7033.34	-1105.82	-9251.54	66.26	297.20	839.98	0.35	FAIL	
17125.00†	7152.52	-1377.78	-9330.61	17019.57	7032.89	-1113.68	-9350.96	65.65	290.65	844.79	0.34	FAIL	
17225.00†	7152.24	-1378.43	-9430.61	17119.30	7032.44	-1121.55	-9450.39	65.02	284.13	849.26	0.33	FAIL	
17325.00†	7151.95	-1379.07	-9530.61	17219.04	7031.98	-1129.41	-9549.81	64.36	277.65	853.37	0.32	FAIL	
17425.00†	7151.66	-1379.72	-9630.61	17318.78	7031.53	-1137.28	-9649.24	63.66	271.21	857.08	0.32	FAIL	
17525.00†	7151.37	-1380.36	-9730.60	17418.51	7031.08	-1145.15	-9748.66	62.94	264.81	860.36	0.31	FAIL	
17625.00†	7151.08	-1381.01	-9830.60	17518.25	7030.62	-1153.01	-9848.09	62.17	258.45	863.15	0.30	FAIL	
17725.00†	7150.79	-1381.65	-9930.60	17617.99	7030.17	-1160.88	-9947.51	61.37	252.15	865.43	0.29	FAIL	
17825.00†	7150.51	-1382.30	-10030.60	17717.73	7029.72	-1168.74	-10046.94	60.53	245.89	867.12	0.28	FAIL	
17925.00†	7150.22	-1382.94	-10130.59	17817.46	7029.27	-1176.61	-10146.37	59.64	239.69	868.18	0.28	FAIL	
17997.36†	7150.01	-1383.41	-10202.95	17876.07	7029.00	-1181.23	-10204.79	59.10	235.63	869.72	0.27	FAIL	
18000.13	7150.00	-1383.43	-10205.72	17876.07	7029.00	-1181.23	-10204.79	59.10	235.64	869.26	0.27	FAIL	

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: DONN 5N-20C-L PWB Offset Wellpath: DONN 5N-20C-L PWP (REV-B.0)

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: DONN 5N-20C-L PWB Offset Wellpath: DONN 5N-20C-L PWP (REV-B.0)

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
13.5in Open Hole	25.00	1750.00	1725.00	24.00	1729.52	12.21	0.00	-38.70	44.63
9.625in Casing Surface	25.00	1750.00	1725.00	24.00	1729.52	12.21	0.00	-38.70	44.63
8.5in Open Hole	1750.00	17876.07	16126.07	1729.52	N/A	-38.70	44.63	N/A	N/A

SURVEY PROGRAM - Offset Wellbore: DONN 5N-20C-L PWB Offset Wellpath: DONN 5N-20C-L PWP (REV-B.0)

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
25.00	1750.00	Custom BHI NaviTrak (IFR1, Standard Rotating+Axial Corr) (Rockies 0.03Gt model)		DONN 5N-20C-L PWB
1750.00	17876.07	Custom BHI AutoTrak Curve (IFR1, Short) (Rockies 0.03Gt model)		DONN 5N-20C-L PWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: DONN 5N-20C-L PWB Offset Wellpath: DONN 5N-20C-L PWP (REV-B.0)

MD Reference: PRECISION DRILLING (25') (RKB)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	25.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 18 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. LINDBLAD 20-23 AWB Offset Wellpath: EX. LINDBLAD 20-23 AWP

Facility: SEC.20-T06N-R66W		Slot: SLOT#05 EX. LINDBLAD 20-23 (1984'FNL & 664'FWL, PR, NB/CD)		Well: EX. LINDBLAD 20-23		Threshold Value=1.00		† = interpolated/extrapolated station					
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	14.00	25.00	-1211.70	-9516.23	-97.26	9593.06	25.57	389.89	PASS	
125.00†	125.00	0.00	0.00	114.00	125.00	-1211.70	-9516.23	-97.26	9593.06	25.57	389.85	PASS	
225.00†	225.00	0.00	0.00	214.00	225.00	-1211.70	-9516.23	-97.26	9593.06	25.57	389.74	PASS	
300.00	300.00	0.00	0.00	289.00	300.00	-1211.70	-9516.23	-97.26	9593.06	25.58	389.62	PASS	
325.00†	325.00	-0.09	0.06	314.00	325.00	-1211.70	-9516.23	118.95	9593.11	25.59	389.58	PASS	
425.00†	424.96	-2.20	1.61	413.96	424.96	-1211.70	-9516.23	118.94	9594.38	25.60	389.33	PASS	
525.00†	524.77	-7.13	5.22	513.77	524.77	-1211.70	-9516.23	118.92	9597.34	25.64	388.91	PASS	
625.00†	624.30	-14.86	10.88	613.30	624.30	-1211.70	-9516.23	118.89	9601.99	25.68	388.49	PASS	
725.00†	723.44	-25.39	18.59	712.44	723.44	-1211.70	-9516.23	118.84	9608.33	25.72	388.06	PASS	
825.00†	822.07	-38.71	28.34	811.07	822.07	-1211.70	-9516.23	118.79	9616.37	25.77	387.60	PASS	
895.18	890.91	-49.71	36.39	879.91	890.91	-1211.70	-9516.23	118.74	9623.03	25.81	387.30	PASS	
925.00†	920.09	-54.67	40.02	909.09	920.09	-1211.70	-9516.23	118.77	9626.04	25.82	387.20	PASS	
1025.00†	1017.94	-71.32	52.20	1006.94	1017.94	-1211.70	-9516.23	118.88	9636.15	25.87	386.87	PASS	
1125.00†	1115.79	-87.96	64.39	1104.79	1115.79	-1211.70	-9516.23	118.98	9646.29	25.92	386.44	PASS	
1225.00†	1213.64	-104.60	76.57	1202.64	1213.64	-1211.70	-9516.23	119.09	9656.47	25.98	385.92	PASS	
1325.00†	1311.48	-121.25	88.76	1300.48	1311.48	-1211.70	-9516.23	119.19	9666.68	26.05	385.32	PASS	
1425.00†	1409.33	-137.89	100.94	1398.33	1409.33	-1211.70	-9516.23	119.30	9676.93	26.12	384.63	PASS	
1525.00†	1507.18	-154.53	113.12	1496.18	1507.18	-1211.70	-9516.23	119.40	9687.21	26.20	383.86	PASS	
1625.00†	1605.03	-171.18	125.31	1594.03	1605.03	-1211.70	-9516.23	119.51	9697.52	26.28	383.01	PASS	
1725.00†	1702.88	-187.82	137.49	1691.88	1702.88	-1211.70	-9516.23	119.61	9707.86	26.37	382.09	PASS	
1825.00†	1800.73	-204.47	149.67	1789.73	1800.73	-1211.70	-9516.23	119.72	9718.24	26.17	381.61	PASS	
1925.00†	1898.58	-221.11	161.86	1887.58	1898.58	-1211.70	-9516.23	119.82	9728.65	26.21	381.50	PASS	
2025.00†	1996.43	-237.75	174.04	1985.43	1996.43	-1211.70	-9516.23	119.92	9739.09	26.26	381.19	PASS	
2125.00†	2094.28	-254.40	186.22	2083.28	2094.28	-1211.70	-9516.23	120.03	9749.56	26.32	380.68	PASS	
2225.00†	2192.13	-271.04	198.41	2181.13	2192.13	-1211.70	-9516.23	120.13	9760.07	26.39	379.97	PASS	
2325.00†	2289.98	-287.68	210.59	2278.98	2289.98	-1211.70	-9516.23	120.23	9770.61	26.48	379.08	PASS	
2425.00†	2387.83	-304.33	222.77	2376.83	2387.83	-1211.70	-9516.23	120.34	9781.18	26.58	378.01	PASS	
2525.00†	2485.68	-320.97	234.96	2474.68	2485.68	-1211.70	-9516.23	120.44	9791.78	26.70	376.76	PASS	
2625.00†	2583.53	-337.62	247.14	2572.53	2583.53	-1211.70	-9516.23	120.54	9802.42	26.82	375.33	PASS	
2725.00†	2681.38	-354.26	259.33	2670.38	2681.38	-1211.70	-9516.23	120.64	9813.09	26.96	373.75	PASS	
2825.00†	2779.23	-370.90	271.51	2768.23	2779.23	-1211.70	-9516.23	120.75	9823.78	27.11	372.01	PASS	
2925.00†	2877.08	-387.55	283.69	2866.08	2877.08	-1211.70	-9516.23	120.85	9834.51	27.28	370.12	PASS	
3025.00†	2974.93	-404.19	295.88	2963.93	2974.93	-1211.70	-9516.23	120.95	9845.28	27.45	368.09	PASS	
3125.00†	3072.78	-420.83	308.06	3061.78	3072.78	-1211.70	-9516.23	121.05	9856.07	27.64	365.94	PASS	
3225.00†	3170.63	-437.48	320.24	3159.63	3170.63	-1211.70	-9516.23	121.15	9866.89	27.84	363.66	PASS	
3325.00†	3268.48	-454.12	332.43	3257.48	3268.48	-1211.70	-9516.23	121.25	9877.75	28.05	361.26	PASS	
3425.00†	3366.33	-470.77	344.61	3355.33	3366.33	-1211.70	-9516.23	121.35	9888.64	28.27	358.77	PASS	
3525.00†	3464.18	-487.41	356.79	3453.18	3464.18	-1211.70	-9516.23	121.45	9899.55	28.50	356.18	PASS	
3625.00†	3562.03	-504.05	368.98	3551.03	3562.03	-1211.70	-9516.23	121.55	9910.50	28.74	353.50	PASS	
3725.00†	3659.88	-520.70	381.16	3648.88	3659.88	-1211.70	-9516.23	121.65	9921.48	28.99	350.75	PASS	
3825.00†	3757.73	-537.34	393.34	3746.73	3757.73	-1211.70	-9516.23	121.75	9932.49	29.25	347.92	PASS	
3925.00†	3855.57	-553.98	405.53	3844.57	3855.57	-1211.70	-9516.23	121.85	9943.53	29.53	345.03	PASS	
4025.00†	3953.42	-570.63	417.71	3942.42	3953.42	-1211.70	-9516.23	121.95	9954.60	29.81	342.09	PASS	
4125.00†	4051.27	-587.27	429.90	4040.27	4051.27	-1211.70	-9516.23	122.05	9965.70	30.09	339.11	PASS	
4225.00†	4149.12	-603.92	442.08	4138.12	4149.12	-1211.70	-9516.23	122.15	9976.84	30.39	336.08	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 19 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. LINDBLAD 20-23 AWB Offset Wellpath: EX. LINDBLAD 20-23 AWP

Facility: SEC.20-T06N-R66W		Slot: SLOT#05 EX. LINDBLAD 20-23 (1984'FNL & 664'FWL, PR, NB/CD)		Well: EX. LINDBLAD 20-23		Threshold Value=1.00		† = interpolated/extrapolated station					
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
4325.00†	4246.97	-620.56	454.26	4235.97	4246.97	-1211.70	-9516.23	122.25	9988.00	30.70	333.02	PASS	
4425.00†	4344.82	-637.20	466.45	4333.82	4344.82	-1211.70	-9516.23	122.35	9999.19	31.01	329.94	PASS	
4525.00†	4442.67	-653.85	478.63	4431.67	4442.67	-1211.70	-9516.23	122.44	10010.41	31.33	326.83	PASS	
4625.00†	4540.52	-670.49	490.81	4529.52	4540.52	-1211.70	-9516.23	122.54	10021.67	31.66	323.71	PASS	
4725.00†	4638.37	-687.13	503.00	4627.37	4638.37	-1211.70	-9516.23	122.64	10032.95	32.00	320.58	PASS	
4825.00†	4736.22	-703.78	515.18	4725.22	4736.22	-1211.70	-9516.23	122.74	10044.26	32.35	317.45	PASS	
4925.00†	4834.07	-720.42	527.36	4823.07	4834.07	-1211.70	-9516.23	122.84	10055.60	57.44	177.24	PASS	
5025.00†	4931.92	-737.07	539.55	4920.92	4931.92	-1211.70	-9516.23	122.93	10066.97	58.49	174.20	PASS	
5125.00†	5029.77	-753.71	551.73	5018.77	5029.77	-1211.70	-9516.23	123.03	10078.37	60.26	169.22	PASS	
5225.00†	5127.62	-770.35	563.91	5116.62	5127.62	-1211.70	-9516.23	123.13	10089.80	62.65	162.88	PASS	
5325.00†	5225.47	-787.00	576.10	5214.47	5225.47	-1211.70	-9516.23	123.22	10101.26	65.53	155.81	PASS	
5425.00†	5323.32	-803.64	588.28	5312.32	5323.32	-1211.70	-9516.23	123.32	10112.76	68.81	148.49	PASS	
5525.00†	5421.17	-820.28	600.47	5410.17	5421.17	-1211.70	-9516.23	123.41	10124.26	72.38	141.24	PASS	
5625.00†	5519.02	-836.93	612.65	5508.02	5519.02	-1211.70	-9516.23	123.51	10135.81	76.19	134.27	PASS	
5725.00†	5616.87	-853.57	624.83	5605.87	5616.87	-1211.70	-9516.23	123.61	10147.38	80.18	127.68	PASS	
5825.00†	5714.72	-870.22	637.02	5703.72	5714.72	-1211.70	-9516.23	123.70	10158.98	84.30	121.52	PASS	
5925.00†	5812.57	-886.86	649.20	5801.57	5812.57	-1211.70	-9516.23	123.80	10170.62	88.54	115.79	PASS	
6025.00†	5910.42	-903.50	661.38	5899.42	5910.42	-1211.70	-9516.23	123.89	10182.28	92.87	110.48	PASS	
6125.00†	6008.27	-920.15	673.57	5997.27	6008.27	-1211.70	-9516.23	123.99	10193.96	97.27	105.56	PASS	
6225.00†	6106.12	-936.79	685.75	6095.12	6106.12	-1211.70	-9516.23	124.08	10205.68	101.73	101.02	PASS	
6325.00†	6203.97	-953.43	697.93	6192.97	6203.97	-1211.70	-9516.23	124.18	10217.43	106.23	96.82	PASS	
6425.00†	6301.82	-970.08	710.12	6290.82	6301.82	-1211.70	-9516.23	124.27	10229.20	110.78	92.92	PASS	
6525.00†	6399.66	-986.72	722.30	6388.66	6399.66	-1211.70	-9516.23	124.36	10241.00	115.37	89.31	PASS	
6605.93	6478.85	-1000.19	732.16	6467.85	6478.85	-1211.70	-9516.23	124.44	10250.57	119.10	86.58	PASS	
6625.00†	6497.54	-1003.38	734.20	6486.54	6497.54	-1211.70	-9516.23	117.17	10252.54	119.98	85.95	PASS	
6725.00†	6595.97	-1020.39	735.57	6584.97	6595.97	-1211.70	-9516.23	68.60	10253.58	124.77	82.64	PASS	
6825.00†	6693.34	-1037.59	721.30	6682.34	6693.34	-1211.70	-9516.23	38.10	10239.00	130.01	79.18	PASS	
6925.00†	6787.24	-1054.57	691.74	6776.24	6787.24	-1211.70	-9516.23	25.39	10209.17	135.14	75.94	PASS	
7025.00†	6875.37	-1070.91	647.62	6864.37	6875.37	-1211.70	-9516.23	19.29	10164.82	139.81	73.07	PASS	
7125.00†	6955.55	-1086.20	590.03	6944.55	6955.55	-1211.70	-9516.23	15.97	10107.03	143.95	70.55	PASS	
7225.00†	7025.81	-1100.06	520.38	7014.81	7025.81	-1211.70	-9516.23	14.07	10037.23	147.50	68.37	PASS	
7325.00†	7084.42	-1112.16	440.40	7073.42	7084.42	-1211.70	-9516.23	13.07	9957.12	150.40	66.51	PASS	
7425.00†	7129.94	-1122.20	352.04	7118.94	7129.94	-1211.70	-9516.23	12.85	9868.68	152.59	64.97	PASS	
7525.00†	7161.25	-1129.93	257.49	7150.25	7161.25	-1211.70	-9516.23	13.80	9774.06	154.07	63.73	PASS	
7625.00†	7177.57	-1135.16	159.08	7166.57	7177.57	-1211.70	-9516.23	20.02	9675.61	154.82	62.78	PASS	
7682.94	7180.00	-1136.99	101.24	7169.00	7180.00	-1211.70	-9516.23	100.23	9617.76	154.93	62.36	PASS	
7725.00†	7179.88	-1138.00	59.19	7168.88	7179.88	-1211.70	-9516.23	100.19	9575.70	154.93	62.09	PASS	
7825.00†	7179.59	-1140.39	-40.78	7168.59	7179.59	-1211.70	-9516.23	100.09	9475.72	154.92	61.44	PASS	
7925.00†	7179.29	-1142.78	-140.75	7168.29	7179.29	-1211.70	-9516.23	99.98	9375.73	154.91	60.80	PASS	
8025.00†	7179.00	-1145.17	-240.72	7168.00	7179.00	-1211.70	-9516.23	99.88	9275.74	154.91	60.15	PASS	
8125.00†	7178.71	-1147.56	-340.69	7167.71	7178.71	-1211.70	-9516.23	99.77	9175.76	154.90	59.50	PASS	
8225.00†	7178.42	-1149.95	-440.66	7167.42	7178.42	-1211.70	-9516.23	99.67	9075.77	154.90	58.86	PASS	
8325.00†	7178.13	-1152.34	-540.63	7167.13	7178.13	-1211.70	-9516.23	99.56	8975.79	154.90	58.21	PASS	
8425.00†	7177.84	-1154.73	-640.61	7166.84	7177.84	-1211.70	-9516.23	99.46	8875.80	154.89	57.56	PASS	
8525.00†	7177.55	-1157.12	-740.58	7166.55	7177.55	-1211.70	-9516.23	99.35	8775.82	154.90	56.91	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 20 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. LINDBLAD 20-23 AWB Offset Wellpath: EX. LINDBLAD 20-23 AWP

Facility: SEC.20-T06N-R66W				Slot: SLOT#05 EX. LINDBLAD 20-23		1984'FNL & 664'FWL, PR, NB/CD		Well: EX. LINDBLAD 20-23		Threshold Value=1.00		† = interpolated/extrapolated station	
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
8625.00†	7177.25	-1159.52	-840.55	7166.25	7177.25	-1211.70	-9516.23	99.25	8675.84	154.90	56.26	PASS	
8725.00†	7176.96	-1161.91	-940.52	7165.96	7176.96	-1211.70	-9516.23	99.15	8575.85	154.90	55.61	PASS	
8825.00†	7176.67	-1164.30	-1040.49	7165.67	7176.67	-1211.70	-9516.23	99.04	8475.87	154.91	54.96	PASS	
8925.00†	7176.38	-1166.69	-1140.46	7165.38	7176.38	-1211.70	-9516.23	98.94	8375.89	154.91	54.31	PASS	
9025.00†	7176.09	-1169.08	-1240.43	7165.09	7176.09	-1211.70	-9516.23	98.83	8275.91	154.92	53.66	PASS	
9125.00†	7175.80	-1171.47	-1340.40	7164.80	7175.80	-1211.70	-9516.23	98.73	8175.92	154.93	53.01	PASS	
9225.00†	7175.51	-1173.86	-1440.37	7164.51	7175.51	-1211.70	-9516.23	98.62	8075.94	154.94	52.36	PASS	
9325.00†	7175.21	-1176.25	-1540.34	7164.21	7175.21	-1211.70	-9516.23	98.52	7975.96	154.96	51.70	PASS	
9425.00†	7174.92	-1178.64	-1640.32	7163.92	7174.92	-1211.70	-9516.23	98.41	7875.98	154.97	51.05	PASS	
9525.00†	7174.63	-1181.03	-1740.29	7163.63	7174.63	-1211.70	-9516.23	98.30	7776.00	154.99	50.40	PASS	
9625.00†	7174.34	-1183.42	-1840.26	7163.34	7174.34	-1211.70	-9516.23	98.20	7676.02	155.01	49.74	PASS	
9725.00†	7174.05	-1185.82	-1940.23	7163.05	7174.05	-1211.70	-9516.23	98.09	7576.04	155.03	49.09	PASS	
9825.00†	7173.76	-1188.21	-2040.20	7162.76	7173.76	-1211.70	-9516.23	97.99	7476.06	155.05	48.43	PASS	
9925.00†	7173.47	-1190.60	-2140.17	7162.47	7173.47	-1211.70	-9516.23	97.88	7376.09	155.07	47.78	PASS	
10025.00†	7173.17	-1192.99	-2240.14	7162.17	7173.17	-1211.70	-9516.23	97.78	7276.11	155.10	47.12	PASS	
10125.00†	7172.88	-1195.38	-2340.11	7161.88	7172.88	-1211.70	-9516.23	97.67	7176.13	155.12	46.47	PASS	
10225.00†	7172.59	-1197.77	-2440.08	7161.59	7172.59	-1211.70	-9516.23	97.57	7076.16	155.15	45.81	PASS	
10325.00†	7172.30	-1200.16	-2540.05	7161.30	7172.30	-1211.70	-9516.23	97.46	6976.18	155.18	45.16	PASS	
10425.00†	7172.01	-1202.55	-2640.03	7161.01	7172.01	-1211.70	-9516.23	97.35	6876.21	155.22	44.50	PASS	
10525.00†	7171.72	-1204.94	-2740.00	7160.72	7171.72	-1211.70	-9516.23	97.25	6776.23	155.25	43.84	PASS	
10625.00†	7171.42	-1207.33	-2839.97	7160.42	7171.42	-1211.70	-9516.23	97.14	6676.26	155.29	43.18	PASS	
10725.00†	7171.13	-1209.72	-2939.94	7160.13	7171.13	-1211.70	-9516.23	97.04	6576.29	155.33	42.53	PASS	
10825.00†	7170.84	-1212.11	-3039.91	7159.84	7170.84	-1211.70	-9516.23	96.93	6476.32	155.37	41.87	PASS	
10925.00†	7170.55	-1214.51	-3139.88	7159.55	7170.55	-1211.70	-9516.23	96.82	6376.35	155.42	41.21	PASS	
11025.00†	7170.26	-1216.90	-3239.85	7159.26	7170.26	-1211.70	-9516.23	96.72	6276.38	155.46	40.55	PASS	
11125.00†	7169.97	-1219.29	-3339.82	7158.97	7169.97	-1211.70	-9516.23	96.61	6176.41	155.51	39.89	PASS	
11225.00†	7169.68	-1221.68	-3439.79	7158.68	7169.68	-1211.70	-9516.23	96.51	6076.44	155.56	39.24	PASS	
11325.00†	7169.38	-1224.07	-3539.76	7158.38	7169.38	-1211.70	-9516.23	96.40	5976.48	155.62	38.58	PASS	
11425.00†	7169.09	-1226.46	-3639.74	7158.09	7169.09	-1211.70	-9516.23	96.29	5876.51	155.67	37.92	PASS	
11525.00†	7168.80	-1228.85	-3739.71	7157.80	7168.80	-1211.70	-9516.23	96.19	5776.55	155.73	37.26	PASS	
11625.00†	7168.51	-1231.24	-3839.68	7157.51	7168.51	-1211.70	-9516.23	96.08	5676.58	155.80	36.60	PASS	
11725.00†	7168.22	-1233.63	-3939.65	7157.22	7168.22	-1211.70	-9516.23	95.98	5576.62	155.86	35.94	PASS	
11825.00†	7167.93	-1236.02	-4039.62	7156.93	7167.93	-1211.70	-9516.23	95.87	5476.66	155.93	35.28	PASS	
11925.00†	7167.64	-1238.41	-4139.59	7156.64	7167.64	-1211.70	-9516.23	95.76	5376.70	156.01	34.62	PASS	
12025.00†	7167.34	-1240.81	-4239.56	7156.34	7167.34	-1211.70	-9516.23	95.66	5276.75	156.08	33.96	PASS	
12125.00†	7167.05	-1243.20	-4339.53	7156.05	7167.05	-1211.70	-9516.23	95.55	5176.79	156.16	33.30	PASS	
12225.00†	7166.76	-1245.59	-4439.50	7155.76	7166.76	-1211.70	-9516.23	95.44	5076.84	156.25	32.64	PASS	
12325.00†	7166.47	-1247.98	-4539.47	7155.47	7166.47	-1211.70	-9516.23	95.34	4976.89	156.34	31.97	PASS	
12425.00†	7166.18	-1250.37	-4639.45	7155.18	7166.18	-1211.70	-9516.23	95.23	4876.94	156.43	31.31	PASS	
12525.00†	7165.89	-1252.76	-4739.42	7154.89	7165.89	-1211.70	-9516.23	95.12	4776.99	156.53	30.65	PASS	
12625.00†	7165.60	-1255.15	-4839.39	7154.60	7165.60	-1211.70	-9516.23	95.02	4677.04	156.64	29.99	PASS	
12725.00†	7165.30	-1257.54	-4939.36	7154.30	7165.30	-1211.70	-9516.23	94.91	4577.10	156.75	29.33	PASS	
12825.00†	7165.01	-1259.93	-5039.33	7154.01	7165.01	-1211.70	-9516.23	94.80	4477.16	156.87	28.67	PASS	
12925.00†	7164.72	-1262.32	-5139.30	7153.72	7164.72	-1211.70	-9516.23	94.70	4377.22	156.99	28.00	PASS	
13025.00†	7164.43	-1264.71	-5239.27	7153.43	7164.43	-1211.70	-9516.23	94.59	4277.28	157.12	27.34	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 21 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. LINDBLAD 20-23 AWB Offset Wellpath: EX. LINDBLAD 20-23 AWP

Facility: SEC.20-T06N-R66W Slot: SLOT#05 EX. LINDBLAD 20-23 (1984'FNL & 664'FWL, PR, NB/CD) Well: EX. LINDBLAD 20-23 Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
13125.00†	7164.14	-1267.10	-5339.24	7153.14	7164.14	-1211.70	-9516.23	94.48	4177.35	157.26	26.68	PASS	
13225.00†	7163.85	-1269.50	-5439.21	7152.85	7163.85	-1211.70	-9516.23	94.37	4077.42	157.41	26.02	PASS	
13325.00†	7163.56	-1271.89	-5539.18	7152.56	7163.56	-1211.70	-9516.23	94.27	3977.50	157.57	25.35	PASS	
13425.00†	7163.26	-1274.28	-5639.16	7152.26	7163.26	-1211.70	-9516.23	94.16	3877.58	157.73	24.69	PASS	
13525.00†	7162.97	-1276.67	-5739.13	7151.97	7162.97	-1211.70	-9516.23	94.05	3777.66	157.91	24.03	PASS	
13625.00†	7162.68	-1279.06	-5839.10	7151.68	7162.68	-1211.70	-9516.23	93.95	3677.75	158.10	23.36	PASS	
13725.00†	7162.39	-1281.45	-5939.07	7151.39	7162.39	-1211.70	-9516.23	93.84	3577.84	158.31	22.70	PASS	
13825.00†	7162.10	-1283.84	-6039.04	7151.10	7162.10	-1211.70	-9516.23	93.73	3477.94	158.53	22.03	PASS	
13925.00†	7161.81	-1286.23	-6139.01	7150.81	7161.81	-1211.70	-9516.23	93.63	3378.04	158.77	21.37	PASS	
14025.00†	7161.51	-1288.62	-6238.98	7150.51	7161.51	-1211.70	-9516.23	93.52	3278.15	159.03	20.70	PASS	
14032.94	7161.49	-1288.81	-6246.92	7150.49	7161.49	-1211.70	-9516.23	93.51	3270.22	159.05	20.65	PASS	
14125.00†	7161.22	-1288.79	-6338.97	7150.22	7161.22	-1211.70	-9516.23	-179.36	3178.19	159.20	20.05	PASS	
14211.94	7160.97	-1284.71	-6425.81	7149.97	7160.97	-1211.70	-9516.23	-93.61	3091.28	159.16	19.50	PASS	
14225.00†	7160.93	-1283.79	-6438.83	7149.93	7160.93	-1211.70	-9516.23	-93.59	3078.24	159.14	19.42	PASS	
14325.00†	7160.64	-1276.82	-6538.59	7149.64	7160.64	-1211.70	-9516.23	-93.48	2978.35	158.98	18.81	PASS	
14411.94	7160.39	-1270.75	-6625.32	7149.39	7160.39	-1211.70	-9516.23	-93.38	2891.51	158.84	18.28	PASS	
14425.00†	7160.35	-1269.89	-6638.35	7149.35	7160.35	-1211.70	-9516.23	-93.90	2878.47	158.82	18.20	PASS	
14525.00†	7160.06	-1266.21	-6738.27	7149.06	7160.06	-1211.70	-9516.23	108.05	2778.49	158.81	17.57	PASS	
14625.00†	7159.76	-1267.77	-6838.25	7148.76	7159.76	-1211.70	-9516.23	92.68	2678.57	159.04	16.91	PASS	
14725.00†	7159.47	-1274.55	-6938.00	7148.47	7159.47	-1211.70	-9516.23	91.42	2578.99	159.58	16.23	PASS	
14825.00†	7159.17	-1286.55	-7037.27	7148.17	7159.17	-1211.70	-9516.23	90.94	2480.09	160.57	15.51	PASS	
14925.00†	7158.88	-1303.73	-7135.77	7147.88	7158.88	-1211.70	-9516.23	90.69	2382.24	162.19	14.75	PASS	
14937.60	7158.84	-1306.26	-7148.12	7147.84	7158.84	-1211.70	-9516.23	90.67	2370.00	162.45	14.65	PASS	
15025.00†	7158.59	-1324.09	-7233.68	7147.59	7158.59	-1211.70	-9516.23	90.64	2285.32	164.51	13.95	PASS	
15037.60	7158.55	-1326.66	-7246.02	7147.55	7158.55	-1211.70	-9516.23	90.64	2273.12	164.85	13.84	PASS	
15125.00†	7158.30	-1342.52	-7331.95	7147.30	7158.30	-1211.70	-9516.23	90.75	2188.19	167.18	13.14	PASS	
15225.00†	7158.01	-1355.83	-7431.05	7147.01	7158.01	-1211.70	-9516.23	90.94	2090.15	169.73	12.36	PASS	
15325.00†	7157.72	-1363.93	-7530.71	7146.72	7157.72	-1211.70	-9516.23	91.26	1991.35	171.96	11.62	PASS	
15417.62	7157.45	-1366.77	-7623.28	7146.45	7157.45	-1211.70	-9516.23	91.87	1899.29	173.59	10.98	PASS	
15425.00†	7157.43	-1366.82	-7630.66	7146.43	7157.43	-1211.70	-9516.23	91.86	1891.94	173.70	10.93	PASS	
15525.00†	7157.14	-1367.46	-7730.65	7146.14	7157.14	-1211.70	-9516.23	91.76	1792.36	175.30	10.26	PASS	
15625.00†	7156.85	-1368.11	-7830.65	7145.85	7156.85	-1211.70	-9516.23	91.66	1692.82	177.12	9.59	PASS	
15725.00†	7156.56	-1368.75	-7930.65	7145.56	7156.56	-1211.70	-9516.23	91.57	1593.34	179.22	8.92	PASS	
15825.00†	7156.27	-1369.40	-8030.65	7145.27	7156.27	-1211.70	-9516.23	91.47	1493.93	181.66	8.25	PASS	
15925.00†	7155.98	-1370.04	-8130.64	7144.98	7155.98	-1211.70	-9516.23	91.37	1394.60	184.51	7.58	PASS	
16025.00†	7155.70	-1370.69	-8230.64	7144.70	7155.70	-1211.70	-9516.23	91.27	1295.38	187.87	6.92	PASS	
16125.00†	7155.41	-1371.33	-8330.64	7144.41	7155.41	-1211.70	-9516.23	91.17	1196.29	191.89	6.25	PASS	
16225.00†	7155.12	-1371.98	-8430.64	7144.12	7155.12	-1211.70	-9516.23	91.07	1097.36	196.75	5.59	PASS	
16325.00†	7154.83	-1372.62	-8530.63	7143.83	7154.83	-1211.70	-9516.23	90.97	998.64	202.70	4.94	PASS	
16425.00†	7154.54	-1373.27	-8630.63	7143.54	7154.54	-1211.70	-9516.23	90.87	900.21	210.11	4.30	PASS	
16525.00†	7154.25	-1373.91	-8730.63	7143.25	7154.25	-1211.70	-9516.23	90.78	802.17	219.52	3.66	PASS	
16625.00†	7153.97	-1374.56	-8830.63	7142.97	7153.97	-1211.70	-9516.23	90.68	704.68	231.74	3.05	PASS	
16725.00†	7153.68	-1375.20	-8930.62	7142.68	7153.68	-1211.70	-9516.23	90.58	608.00	248.07	2.46	PASS	
16825.00†	7153.39	-1375.85	-9030.62	7142.39	7153.39	-1211.70	-9516.23	90.48	512.60	270.63	1.90	PASS	
16925.00†	7153.10	-1376.49	-9130.62	7142.10	7153.10	-1211.70	-9516.23	90.38	419.34	303.12	1.38	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 22 of 202

**BAKER
HUGHES**
a GE company



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. LINDBLAD 20-23 AWB Offset Wellpath: EX. LINDBLAD 20-23 AWP

Facility: SEC.20-T06N-R66W Slot: SLOT#05 EX. LINDBLAD 20-23 (1984'FNL & 664'FWL, PR, NB/CD) Well: EX. LINDBLAD 20-23 Threshold Value=1.00 † = interpolated/extrapolated station												
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status
17025.00†	7152.81	-1377.14	-9230.62	7141.81	7152.81	-1211.70	-9516.23	90.28	330.06	352.08	0.94	FAIL
17125.00†	7152.52	-1377.78	-9330.61	7141.52	7152.52	-1211.70	-9516.23	90.18	249.07	427.61	0.58	FAIL
17225.00†	7152.24	-1378.43	-9430.61	7141.24	7152.24	-1211.70	-9516.23	90.08	187.42	529.38	0.35	FAIL
17309.36†	7151.99	-1378.97	-9514.96	7140.99	7151.99	-1211.70	-9516.23	90.00	167.27	578.70	0.29	FAIL
17309.72†	7151.99	-1378.97	-9515.33	7140.79	7151.79	-1211.70	-9516.23	89.92	167.27	578.69	0.29	FAIL
17325.00†	7151.95	-1379.07	-9530.61	7140.95	7151.95	-1211.70	-9516.23	89.99	167.99	576.63	0.29	FAIL
17425.00†	7151.66	-1379.72	-9630.61	7140.66	7151.66	-1211.70	-9516.23	89.89	203.25	496.03	0.41	FAIL
17525.00†	7151.37	-1380.36	-9730.60	7140.37	7151.37	-1211.70	-9516.23	89.79	272.77	399.02	0.68	FAIL
17625.00†	7151.08	-1381.01	-9830.60	7140.08	7151.08	-1211.70	-9516.23	89.69	357.06	332.70	1.07	PASS
17725.00†	7150.79	-1381.65	-9930.60	7139.79	7150.79	-1211.70	-9516.23	89.59	447.87	289.76	1.55	PASS
17825.00†	7150.51	-1382.30	-10030.60	7139.51	7150.51	-1211.70	-9516.23	89.49	541.92	260.95	2.08	PASS
17925.00†	7150.22	-1382.94	-10130.59	7139.22	7150.22	-1211.70	-9516.23	89.39	637.78	240.74	2.65	PASS
18000.13	7150.00	-1383.43	-10205.72	7139.00	7150.00	-1211.70	-9516.23	89.32	710.56	228.57	3.11	PASS

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: EX. LINDBLAD 20-23 AWB Offset Wellpath: EX. LINDBLAD 20-23 AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

WELLPATH COMPOSITION - Offset Wellbore: EX. LINDBLAD 20-23 AWB Offset Wellpath: EX. LINDBLAD 20-23 AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
0.00	7305.00	Drift Indicator - Inclination Only (Actual Survey)	ASSUMED VERTICAL TO TD FROM COGCC <7305>	EX. LINDBLAD 20-23 AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: EX. LINDBLAD 20-23 AWB Offset Wellpath: EX. LINDBLAD 20-23 AWP

MD Reference: Rig on SLOT#05 LINDBLAD 20-23 (1984'FNL & 664'FWL, PR, NB/CD) (RT)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	4765.00ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 23 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DONN 32C-20-L PWB Offset Wellpath: DONN 32C-20-L PWP (REV-B.0)

Facility: SEC.21-T06N-R66W Slot: SLOT#25 DONN 32C-20-L (978'FNL & 252'FEL, SEC.21) Well: DONN 32C-20-L Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	25.00	25.00	-40.07	-0.28	-179.60	40.08	1.56	65.19	PASS	
125.00†	125.00	0.00	0.00	125.00	125.00	-40.07	-0.28	-179.60	40.08	1.89	42.20	PASS	
225.00†	225.00	0.00	0.00	224.70	224.70	-40.17	-0.23	-179.68	40.17	2.46	26.23	PASS	
300.00	300.00	0.00	0.00	298.76	298.74	-41.57	0.54	179.25	41.59	3.12	18.86	PASS	
325.00†	325.00	-0.09	0.06	323.42	323.38	-42.40	1.01	34.92	42.36	3.34	17.40	PASS	
425.00†	424.96	-2.20	1.61	422.01	421.79	-47.60	3.87	33.28	45.57	4.76	11.76	PASS	
525.00†	524.77	-7.13	5.22	520.48	519.81	-55.75	8.37	32.33	48.98	6.25	9.08	PASS	
625.00†	624.30	-14.86	10.88	618.84	617.35	-66.84	14.48	31.94	52.56	7.48	7.91	PASS	
725.00†	723.44	-25.39	18.59	717.07	714.27	-80.82	22.20	32.02	56.30	8.58	7.27	PASS	
825.00†	822.07	-38.71	28.34	815.19	810.47	-97.69	31.50	32.46	60.19	9.62	6.84	PASS	
895.18	890.91	-49.71	36.39	883.97	877.49	-111.23	38.97	32.96	63.02	10.22	6.71	PASS	
925.00†	920.09	-54.67	40.02	913.18	905.83	-117.40	42.38	33.14	64.37	10.44	6.69	PASS	
1025.00†	1017.94	-71.32	52.20	1012.95	1002.50	-139.06	54.32	33.49	69.51	11.01	6.82	PASS	
1125.00†	1115.79	-87.96	64.39	1112.82	1099.25	-160.73	66.28	33.78	74.65	11.61	6.92	PASS	
1225.00†	1213.64	-104.60	76.57	1212.69	1196.00	-182.41	78.24	34.04	79.80	12.22	7.00	PASS	
1325.00†	1311.48	-121.25	88.76	1312.56	1292.75	-204.08	90.20	34.27	84.94	12.96	7.00	PASS	
1425.00†	1409.33	-137.89	100.94	1412.42	1389.50	-225.76	102.15	34.47	90.09	13.68	7.01	PASS	
1525.00†	1507.18	-154.53	113.12	1512.29	1486.25	-247.43	114.11	34.65	95.23	14.43	7.00	PASS	
1625.00†	1605.03	-171.18	125.31	1612.16	1583.00	-269.11	126.07	34.81	100.38	15.20	6.98	PASS	
1725.00†	1702.88	-187.82	137.49	1712.02	1679.75	-290.79	138.02	34.96	105.53	16.00	6.96	PASS	
1825.00†	1800.73	-204.47	149.67	1811.89	1776.50	-312.46	149.98	35.09	110.68	16.28	7.06	PASS	
1925.00†	1898.58	-221.11	161.86	1911.76	1873.25	-334.14	161.94	35.21	115.83	16.62	7.23	PASS	
2025.00†	1996.43	-237.75	174.04	2011.62	1970.00	-355.81	173.89	35.32	120.98	17.04	7.37	PASS	
2125.00†	2094.28	-254.40	186.22	2111.49	2066.75	-377.49	185.85	35.42	126.13	17.54	7.45	PASS	
2225.00†	2192.13	-271.04	198.41	2211.36	2163.50	-399.16	197.81	35.51	131.28	18.12	7.50	PASS	
2325.00†	2289.98	-287.68	210.59	2311.23	2260.25	-420.84	209.77	35.60	136.43	18.78	7.51	PASS	
2425.00†	2387.83	-304.33	222.77	2411.09	2357.00	-442.51	221.72	35.68	141.59	19.50	7.50	PASS	
2525.00†	2485.68	-320.97	234.96	2510.96	2453.75	-464.19	233.68	35.75	146.74	20.28	7.46	PASS	
2625.00†	2583.53	-337.62	247.14	2610.83	2550.50	-485.87	245.64	35.82	151.89	21.11	7.41	PASS	
2725.00†	2681.38	-354.26	259.33	2710.69	2647.25	-507.54	257.59	35.88	157.04	21.98	7.35	PASS	
2825.00†	2779.23	-370.90	271.51	2810.56	2744.00	-529.22	269.55	35.95	162.20	22.90	7.28	PASS	
2925.00†	2877.08	-387.55	283.69	2910.43	2840.75	-550.89	281.51	36.01	167.35	23.85	7.20	PASS	
3025.00†	2974.93	-404.19	295.88	3010.29	2937.50	-572.57	293.47	36.06	172.50	24.83	7.12	PASS	
3125.00†	3072.78	-420.83	308.06	3110.16	3034.25	-594.24	305.42	36.11	177.66	25.84	7.04	PASS	
3225.00†	3170.63	-437.48	320.24	3210.03	3131.00	-615.92	317.38	36.16	182.81	26.87	6.96	PASS	
3325.00†	3268.48	-454.12	332.43	3309.90	3227.75	-637.59	329.34	36.20	187.96	27.93	6.88	PASS	
3425.00†	3366.33	-470.77	344.61	3409.76	3324.50	-659.27	341.29	36.24	193.12	29.00	6.80	PASS	
3525.00†	3464.18	-487.41	356.79	3509.63	3421.26	-680.95	353.25	36.28	198.27	30.09	6.72	PASS	
3625.00†	3562.03	-504.05	368.98	3609.50	3518.01	-702.62	365.21	36.32	203.42	31.20	6.65	PASS	
3725.00†	3659.88	-520.70	381.16	3709.36	3614.76	-724.30	377.17	36.36	208.58	32.31	6.58	PASS	
3825.00†	3757.73	-537.34	393.34	3809.23	3711.51	-745.97	389.12	36.39	213.73	33.45	6.51	PASS	
3925.00†	3855.57	-553.98	405.53	3909.10	3808.26	-767.65	401.08	36.42	218.88	34.59	6.44	PASS	
4025.00†	3953.42	-570.63	417.71	4008.97	3905.01	-789.32	413.04	36.46	224.04	35.74	6.38	PASS	
4125.00†	4051.27	-587.27	429.90	4108.83	4001.76	-811.00	424.99	36.49	229.19	36.90	6.31	PASS	
4225.00†	4149.12	-603.92	442.08	4208.70	4098.51	-832.67	436.95	36.52	234.35	38.07	6.25	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 24 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DONN 32C-20-L PWB Offset Wellpath: DONN 32C-20-L PWP (REV-B.0)

Facility: SEC.21-T06N-R66W Slot: SLOT#25 DONN 32C-20-L (978'FNL & 252'FEL, SEC.21) Well: DONN 32C-20-L Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
4325.00†	4246.97	-620.56	454.26	4308.57	4195.26	-854.35	448.91	36.54	239.50	39.24	6.20	PASS	
4425.00†	4344.82	-637.20	466.45	4408.43	4292.01	-876.03	460.86	36.57	244.66	40.43	6.14	PASS	
4525.00†	4442.67	-653.85	478.63	4508.30	4388.76	-897.70	472.82	36.59	249.81	41.62	6.09	PASS	
4625.00†	4540.52	-670.49	490.81	4608.17	4485.51	-919.38	484.78	36.62	254.96	42.81	6.04	PASS	
4725.00†	4638.37	-687.13	503.00	4708.03	4582.26	-941.05	496.74	36.64	260.12	44.01	5.99	PASS	
4825.00†	4736.22	-703.78	515.18	4807.90	4679.01	-962.73	508.69	36.66	265.27	45.21	5.94	PASS	
4925.00†	4834.07	-720.42	527.36	4907.77	4775.76	-984.40	520.65	36.69	270.43	46.42	5.90	PASS	
5025.00†	4931.92	-737.07	539.55	5007.64	4872.51	-1006.08	532.61	36.71	275.58	47.63	5.86	PASS	
5125.00†	5029.77	-753.71	551.73	5107.50	4969.26	-1027.75	544.56	36.73	280.74	48.85	5.82	PASS	
5225.00†	5127.62	-770.35	563.91	5207.37	5066.01	-1049.43	556.52	36.74	285.89	50.07	5.78	PASS	
5325.00†	5225.47	-787.00	576.10	5307.24	5162.76	-1071.11	568.48	36.76	291.05	51.29	5.74	PASS	
5425.00†	5323.32	-803.64	588.28	5407.10	5259.51	-1092.78	580.44	36.78	296.20	52.52	5.70	PASS	
5525.00†	5421.17	-820.28	600.47	5506.97	5356.26	-1114.46	592.39	36.80	301.36	53.74	5.67	PASS	
5625.00†	5519.02	-836.93	612.65	5606.84	5453.01	-1136.13	604.35	36.82	306.51	54.98	5.64	PASS	
5725.00†	5616.87	-853.57	624.83	5706.70	5549.76	-1157.81	616.31	36.83	311.66	56.21	5.60	PASS	
5825.00†	5714.72	-870.22	637.02	5806.57	5646.51	-1179.48	628.26	36.85	316.82	57.44	5.57	PASS	
5925.00†	5812.57	-886.86	649.20	5906.44	5743.26	-1201.16	640.22	36.86	321.97	58.68	5.54	PASS	
6025.00†	5910.42	-903.50	661.38	6006.31	5840.01	-1222.83	652.18	36.88	327.13	59.92	5.51	PASS	
6125.00†	6008.27	-920.15	673.57	6106.17	5936.76	-1244.51	664.14	36.89	332.28	61.16	5.48	PASS	
6225.00†	6106.12	-936.79	685.75	6206.04	6033.51	-1266.19	676.09	36.91	337.44	62.40	5.46	PASS	
6325.00†	6203.97	-953.43	697.93	6305.91	6130.26	-1287.86	688.05	36.92	342.59	63.65	5.43	PASS	
6425.00†	6301.82	-970.08	710.12	6405.77	6227.01	-1309.54	700.01	36.93	347.75	64.90	5.41	PASS	
6525.00†	6399.66	-986.72	722.30	6505.64	6323.76	-1331.21	711.96	36.94	352.90	66.14	5.38	PASS	
6605.93	6478.85	-1000.19	732.16	6586.46	6402.06	-1348.75	721.64	36.95	357.08	67.15	5.36	PASS	
6625.00†	6497.54	-1003.38	734.20	6605.51	6420.51	-1352.89	723.92	29.71	358.04	67.37	5.36	PASS	
6725.00†	6595.97	-1020.39	735.57	6704.20	6516.22	-1374.35	734.72	-20.03	362.84	67.86	5.39	PASS	
6825.00†	6693.34	-1037.59	721.30	6802.77	6612.23	-1396.19	733.33	-52.17	367.85	68.06	5.45	PASS	
6925.00†	6787.24	-1054.57	691.74	6903.36	6708.72	-1418.51	716.28	-66.52	373.12	68.25	5.51	PASS	
7025.00†	6875.37	-1070.91	647.62	7006.10	6803.21	-1440.77	683.02	-74.22	378.49	68.19	5.60	PASS	
7125.00†	6955.55	-1086.20	590.03	7111.05	6892.99	-1462.36	633.39	-79.09	383.79	68.99	5.61	PASS	
7225.00†	7025.81	-1100.06	520.38	7218.20	6975.10	-1482.60	567.80	-82.49	388.79	70.01	5.60	PASS	
7325.00†	7084.42	-1112.16	440.40	7327.47	7046.51	-1500.77	487.29	-84.96	393.26	71.82	5.52	PASS	
7425.00†	7129.94	-1122.20	352.04	7438.65	7104.25	-1516.15	393.70	-86.76	396.98	74.66	5.36	PASS	
7525.00†	7161.25	-1129.93	257.49	7551.45	7145.66	-1528.09	289.62	-88.01	399.75	78.53	5.13	PASS	
7625.00†	7177.57	-1135.16	159.08	7665.45	7168.63	-1536.01	178.39	-88.77	401.41	83.27	4.85	PASS	
7682.94	7180.00	-1136.99	101.24	7731.87	7172.94	-1538.59	112.19	-88.99	401.81	86.30	4.69	PASS	
7725.00†	7179.88	-1138.00	59.19	7775.34	7172.91	-1539.65	68.74	-89.01	401.82	88.50	4.57	PASS	
7825.00†	7179.59	-1140.39	-40.78	7875.34	7172.65	-1542.02	-31.23	-89.01	401.80	94.15	4.29	PASS	
7925.00†	7179.29	-1142.78	-140.75	7975.34	7172.39	-1544.39	-131.21	-89.02	401.78	100.52	4.02	PASS	
8025.00†	7179.00	-1145.17	-240.72	8075.34	7172.13	-1546.76	-231.18	-89.02	401.76	112.41	3.59	PASS	
8125.00†	7178.71	-1147.56	-340.69	8175.34	7171.87	-1549.13	-331.15	-89.02	401.74	114.79	3.52	PASS	
8225.00†	7178.42	-1149.95	-440.66	8275.34	7171.61	-1551.50	-431.12	-89.03	401.72	122.61	3.29	PASS	
8325.00†	7178.13	-1152.34	-540.63	8375.34	7171.34	-1553.88	-531.09	-89.03	401.70	130.77	3.08	PASS	
8425.00†	7177.84	-1154.73	-640.61	8475.34	7171.08	-1556.25	-631.06	-89.04	401.68	139.17	2.90	PASS	
8525.00†	7177.55	-1157.12	-740.58	8575.34	7170.82	-1558.62	-731.03	-89.04	401.66	147.78	2.73	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 25 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DONN 32C-20-L PWB Offset Wellpath: DONN 32C-20-L PWP (REV-B.0)

Facility: SEC.21-T06N-R66W Slot: SLOT#25 DONN 32C-20-L (978'FNL & 252'FEL, SEC.21) Well: DONN 32C-20-L Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
8625.00†	7177.25	-1159.52	-840.55	8675.34	7170.56	-1560.99	-831.01	-89.05	401.64	156.56	2.57	PASS	
8725.00†	7176.96	-1161.91	-940.52	8775.34	7170.30	-1563.36	-930.98	-89.05	401.62	165.48	2.43	PASS	
8825.00†	7176.67	-1164.30	-1040.49	8875.34	7170.04	-1565.73	-1030.95	-89.05	401.61	174.54	2.31	PASS	
8925.00†	7176.38	-1166.69	-1140.46	8975.34	7169.77	-1568.11	-1130.92	-89.06	401.59	183.70	2.19	PASS	
9025.00†	7176.09	-1169.08	-1240.43	9075.34	7169.51	-1570.48	-1230.89	-89.06	401.57	192.95	2.09	PASS	
9125.00†	7175.80	-1171.47	-1340.40	9175.34	7169.25	-1572.85	-1330.86	-89.07	401.55	202.29	1.99	PASS	
9225.00†	7175.51	-1173.86	-1440.37	9275.34	7168.99	-1575.22	-1430.84	-89.07	401.53	211.69	1.90	PASS	
9325.00†	7175.21	-1176.25	-1540.34	9375.34	7168.73	-1577.59	-1530.81	-89.07	401.51	221.15	1.82	PASS	
9425.00†	7174.92	-1178.64	-1640.32	9475.34	7168.46	-1579.96	-1630.78	-89.08	401.49	230.67	1.74	PASS	
9525.00†	7174.63	-1181.03	-1740.29	9575.34	7168.20	-1582.34	-1730.75	-89.08	401.47	240.23	1.67	PASS	
9625.00†	7174.34	-1183.42	-1840.26	9675.34	7167.94	-1584.71	-1830.72	-89.09	401.45	249.83	1.61	PASS	
9725.00†	7174.05	-1185.82	-1940.23	9775.34	7167.68	-1587.08	-1930.69	-89.09	401.43	259.47	1.55	PASS	
9825.00†	7173.76	-1188.21	-2040.20	9875.34	7167.42	-1589.45	-2030.66	-89.10	401.41	269.14	1.49	PASS	
9925.00†	7173.47	-1190.60	-2140.17	9975.34	7167.16	-1591.82	-2130.64	-89.10	401.39	278.84	1.44	PASS	
10025.00†	7173.17	-1192.99	-2240.14	10075.34	7166.89	-1594.19	-2230.61	-89.10	401.37	288.57	1.39	PASS	
10125.00†	7172.88	-1195.38	-2340.11	10175.34	7166.63	-1596.57	-2330.58	-89.11	401.35	298.32	1.35	PASS	
10225.00†	7172.59	-1197.77	-2440.08	10275.34	7166.37	-1598.94	-2430.55	-89.11	401.33	308.09	1.30	PASS	
10325.00†	7172.30	-1200.16	-2540.05	10375.34	7166.11	-1601.31	-2530.52	-89.12	401.31	317.88	1.26	PASS	
10425.00†	7172.01	-1202.55	-2640.03	10475.34	7165.85	-1603.68	-2630.49	-89.12	401.29	327.69	1.23	PASS	
10525.00†	7171.72	-1204.94	-2740.00	10575.34	7165.58	-1606.05	-2730.46	-89.12	401.27	337.51	1.19	PASS	
10625.00†	7171.42	-1207.33	-2839.97	10675.34	7165.32	-1608.42	-2830.44	-89.13	401.25	347.35	1.16	PASS	
10725.00†	7171.13	-1209.72	-2939.94	10775.34	7165.06	-1610.80	-2930.41	-89.13	401.23	357.21	1.12	PASS	
10825.00†	7170.84	-1212.11	-3039.91	10875.34	7164.80	-1613.17	-3030.38	-89.14	401.21	367.07	1.09	PASS	
10925.00†	7170.55	-1214.51	-3139.88	10975.34	7164.54	-1615.54	-3130.35	-89.14	401.19	376.95	1.06	PASS	
11025.00†	7170.26	-1216.90	-3239.85	11075.34	7164.28	-1617.91	-3230.32	-89.15	401.17	386.84	1.04	PASS	
11125.00†	7169.97	-1219.29	-3339.82	11175.34	7164.01	-1620.28	-3330.29	-89.15	401.15	396.73	1.01	PASS	
11225.00†	7169.68	-1221.68	-3439.79	11275.34	7163.75	-1622.65	-3430.27	-89.15	401.13	406.64	0.99	FAIL	
11325.00†	7169.38	-1224.07	-3539.76	11375.34	7163.49	-1625.03	-3530.24	-89.16	401.11	416.55	0.96	FAIL	
11425.00†	7169.09	-1226.46	-3639.74	11475.34	7163.23	-1627.40	-3630.21	-89.16	401.09	426.48	0.94	FAIL	
11525.00†	7168.80	-1228.85	-3739.71	11575.34	7162.97	-1629.77	-3730.18	-89.17	401.07	436.41	0.92	FAIL	
11625.00†	7168.51	-1231.24	-3839.68	11675.34	7162.70	-1632.14	-3830.15	-89.17	401.05	446.34	0.90	FAIL	
11725.00†	7168.22	-1233.63	-3939.65	11775.34	7162.44	-1634.51	-3930.12	-89.18	401.04	456.29	0.88	FAIL	
11825.00†	7167.93	-1236.02	-4039.62	11875.34	7162.18	-1636.88	-4030.09	-89.18	401.02	466.24	0.86	FAIL	
11925.00†	7167.64	-1238.41	-4139.59	11975.34	7161.92	-1639.26	-4130.07	-89.18	401.00	476.19	0.84	FAIL	
12025.00†	7167.34	-1240.81	-4239.56	12083.98	7161.63	-1641.39	-4238.68	-89.19	400.63	486.05	0.82	FAIL	
12125.00†	7167.05	-1243.20	-4339.53	12210.13	7161.30	-1637.50	-4364.75	-89.18	395.15	494.33	0.80	FAIL	
12225.00†	7166.76	-1245.59	-4439.50	12334.82	7160.98	-1625.48	-4488.84	-89.15	383.13	500.51	0.77	FAIL	
12325.00†	7166.47	-1247.98	-4539.47	12450.25	7160.67	-1607.37	-4602.83	-89.11	364.98	506.47	0.72	FAIL	
12425.00†	7166.18	-1250.37	-4639.45	12548.29	7160.42	-1590.35	-4699.38	-89.06	345.27	516.28	0.67	FAIL	
12525.00†	7165.89	-1252.76	-4739.42	12642.70	7160.17	-1574.07	-4792.37	-89.01	325.70	527.20	0.62	FAIL	
12625.00†	7165.60	-1255.15	-4839.39	12727.29	7159.95	-1562.16	-4876.11	-88.97	309.25	540.88	0.57	FAIL	
12725.00†	7165.30	-1257.54	-4939.36	12812.97	7159.72	-1553.89	-4961.39	-88.94	297.22	553.71	0.54	FAIL	
12825.00†	7165.01	-1259.93	-5039.33	12899.41	7159.49	-1549.44	-5047.71	-88.92	289.68	565.55	0.51	FAIL	
12925.00†	7164.72	-1262.32	-5139.30	12986.27	7159.26	-1548.89	-5134.55	-88.91	286.66	576.31	0.50	FAIL	
13025.00†	7164.43	-1264.71	-5239.27	13073.19	7159.03	-1552.31	-5221.40	-88.92	288.20	585.91	0.49	FAIL	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 26 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DONN 32C-20-L PWB Offset Wellpath: DONN 32C-20-L PWP (REV-B.0)

Facility: SEC.21-T06N-R66W Slot: SLOT#25 DONN 32C-20-L (978'FNL & 252'FEL, SEC.21) Well: DONN 32C-20-L Threshold Values=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
13125.00†	7164.14	-1267.10	-5339.24	13159.81	7158.80	-1559.63	-5307.70	-88.94	294.27	594.28	0.49	FAIL	
13225.00†	7163.85	-1269.50	-5439.21	13245.78	7158.57	-1570.76	-5392.93	-88.98	304.85	601.38	0.51	FAIL	
13325.00†	7163.56	-1271.89	-5539.18	13332.32	7158.34	-1585.80	-5478.15	-89.03	319.84	607.70	0.53	FAIL	
13425.00†	7163.26	-1274.28	-5639.16	13432.93	7158.08	-1604.97	-5576.93	-89.08	336.53	618.03	0.54	FAIL	
13525.00†	7162.97	-1276.67	-5739.13	13553.81	7157.76	-1623.54	-5696.35	-89.13	349.54	632.88	0.55	FAIL	
13625.00†	7162.68	-1279.06	-5839.10	13676.22	7157.44	-1634.62	-5818.23	-89.15	356.21	645.48	0.55	FAIL	
13725.00†	7162.39	-1281.45	-5939.07	13785.06	7157.16	-1638.88	-5926.99	-89.16	357.67	655.83	0.54	FAIL	
13825.00†	7162.10	-1283.84	-6039.04	13885.06	7156.90	-1642.25	-6026.92	-89.17	358.66	665.84	0.54	FAIL	
13925.00†	7161.81	-1286.23	-6139.01	13985.05	7156.64	-1645.63	-6126.86	-89.18	359.64	675.85	0.53	FAIL	
14025.00†	7161.51	-1288.62	-6238.98	14085.05	7156.38	-1649.00	-6226.80	-89.18	360.62	685.86	0.53	FAIL	
14032.94	7161.49	-1288.81	-6246.92	14092.99	7156.36	-1649.27	-6234.74	-89.18	360.70	686.66	0.52	FAIL	
14125.00†	7161.22	-1288.79	-6338.97	14184.98	7156.12	-1652.37	-6326.68	-89.19	363.82	695.89	0.52	FAIL	
14211.94	7160.97	-1284.71	-6425.81	14271.63	7155.89	-1655.30	-6413.28	-89.19	370.84	704.60	0.53	FAIL	
14225.00†	7160.93	-1283.79	-6438.83	14284.62	7155.86	-1655.74	-6426.26	-89.20	372.19	705.91	0.53	FAIL	
14325.00†	7160.64	-1276.82	-6538.59	14384.09	7155.60	-1659.09	-6525.67	-89.22	382.53	715.92	0.53	FAIL	
14411.94	7160.39	-1270.75	-6625.32	14470.56	7155.37	-1662.01	-6612.09	-89.25	391.51	724.62	0.54	FAIL	
14425.00†	7160.35	-1269.89	-6638.35	14483.56	7155.34	-1662.45	-6625.08	-89.25	392.82	725.93	0.54	FAIL	
14525.00†	7160.06	-1266.21	-6738.27	14583.30	7155.08	-1665.82	-6724.76	-89.28	399.87	735.96	0.54	FAIL	
14625.00†	7159.76	-1267.77	-6838.25	14683.27	7154.82	-1669.19	-6824.68	-89.30	401.68	745.99	0.54	FAIL	
14725.00†	7159.47	-1274.55	-6938.00	14783.20	7154.56	-1672.56	-6924.55	-89.30	398.27	755.98	0.53	FAIL	
14825.00†	7159.17	-1286.55	-7037.27	14882.81	7154.30	-1675.92	-7024.11	-89.30	389.63	765.89	0.51	FAIL	
14925.00†	7158.88	-1303.73	-7135.77	14981.84	7154.04	-1679.27	-7123.08	-89.28	375.78	775.68	0.48	FAIL	
14937.60	7158.84	-1306.26	-7148.12	14994.26	7154.01	-1679.69	-7135.50	-89.28	373.67	776.91	0.48	FAIL	
15025.00†	7158.59	-1324.09	-7233.68	15080.37	7153.78	-1682.59	-7221.56	-89.25	358.74	785.38	0.46	FAIL	
15037.60	7158.55	-1326.66	-7246.02	15092.79	7153.75	-1683.01	-7233.97	-89.25	356.59	786.60	0.45	FAIL	
15125.00†	7158.30	-1342.52	-7331.95	15179.22	7153.53	-1685.93	-7320.34	-89.22	343.64	795.13	0.43	FAIL	
15225.00†	7158.01	-1355.83	-7431.05	15278.71	7153.27	-1689.28	-7419.78	-89.20	333.68	805.01	0.41	FAIL	
15325.00†	7157.72	-1363.93	-7530.71	15378.58	7153.01	-1692.65	-7519.60	-89.18	328.95	815.00	0.40	FAIL	
15417.62	7157.45	-1366.77	-7623.28	15471.19	7152.77	-1695.78	-7612.15	-89.18	329.23	824.29	0.40	FAIL	
15425.00†	7157.43	-1366.82	-7630.66	15478.57	7152.75	-1696.03	-7619.53	-89.18	329.43	825.03	0.40	FAIL	
15525.00†	7157.14	-1367.46	-7730.65	15578.53	7152.49	-1699.40	-7719.43	-89.19	332.16	835.07	0.40	FAIL	
15625.00†	7156.85	-1368.11	-7830.65	15678.50	7152.23	-1702.78	-7819.34	-89.20	334.89	845.11	0.40	FAIL	
15725.00†	7156.56	-1368.75	-7930.65	15778.46	7151.96	-1706.15	-7919.24	-89.22	337.62	855.16	0.39	FAIL	
15825.00†	7156.27	-1369.40	-8030.65	15878.42	7151.70	-1709.52	-8019.15	-89.23	340.35	865.20	0.39	FAIL	
15925.00†	7155.98	-1370.04	-8130.64	15978.39	7151.44	-1712.90	-8119.05	-89.24	343.08	875.25	0.39	FAIL	
16025.00†	7155.70	-1370.69	-8230.64	16078.35	7151.18	-1716.27	-8218.96	-89.25	345.81	885.29	0.39	FAIL	
16125.00†	7155.41	-1371.33	-8330.64	16178.31	7150.92	-1719.64	-8318.87	-89.26	348.54	895.34	0.39	FAIL	
16225.00†	7155.12	-1371.98	-8430.64	16278.27	7150.66	-1723.02	-8418.77	-89.27	351.27	905.39	0.39	FAIL	
16325.00†	7154.83	-1372.62	-8530.63	16378.24	7150.40	-1726.39	-8518.68	-89.28	353.99	915.44	0.39	FAIL	
16425.00†	7154.54	-1373.27	-8630.63	16478.20	7150.14	-1729.76	-8618.58	-89.29	356.72	925.49	0.38	FAIL	
16525.00†	7154.25	-1373.91	-8730.63	16578.16	7149.88	-1733.14	-8718.49	-89.30	359.45	935.54	0.38	FAIL	
16625.00†	7153.97	-1374.56	-8830.63	16678.12	7149.62	-1736.51	-8818.39	-89.31	362.18	945.59	0.38	FAIL	
16725.00†	7153.68	-1375.20	-8930.62	16778.09	7149.36	-1739.88	-8918.30	-89.32	364.91	955.64	0.38	FAIL	
16825.00†	7153.39	-1375.85	-9030.62	16878.05	7149.10	-1743.26	-9018.20	-89.33	367.64	965.69	0.38	FAIL	
16925.00†	7153.10	-1376.49	-9130.62	16978.01	7148.84	-1746.63	-9118.11	-89.34	370.37	975.75	0.38	FAIL	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 27 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DONN 32C-20-L PWB Offset Wellpath: DONN 32C-20-L PWP (REV-B.0)

Facility: SEC.21-T06N-R66W Slot: SLOT#25 DONN 32C-20-L (978'FNL & 252'FEL, SEC.21) Well: DONN 32C-20-L Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
17025.00†	7152.81	-1377.14	-9230.62	17077.98	7148.58	-1750.00	-9218.01	-89.35	373.10	985.80	0.38	FAIL	
17125.00†	7152.52	-1377.78	-9330.61	17177.94	7148.32	-1753.38	-9317.92	-89.35	375.83	995.85	0.38	FAIL	
17225.00†	7152.24	-1378.43	-9430.61	17277.90	7148.06	-1756.75	-9417.83	-89.36	378.56	1005.91	0.38	FAIL	
17325.00†	7151.95	-1379.07	-9530.61	17377.86	7147.80	-1760.12	-9517.73	-89.37	381.29	1015.96	0.37	FAIL	
17425.00†	7151.66	-1379.72	-9630.61	17477.83	7147.54	-1763.50	-9617.64	-89.38	384.02	1026.02	0.37	FAIL	
17525.00†	7151.37	-1380.36	-9730.60	17577.79	7147.28	-1766.87	-9717.54	-89.39	386.75	1036.08	0.37	FAIL	
17625.00†	7151.08	-1381.01	-9830.60	17677.75	7147.02	-1770.24	-9817.45	-89.40	389.48	1046.13	0.37	FAIL	
17725.00†	7150.79	-1381.65	-9930.60	17777.71	7146.76	-1773.62	-9917.35	-89.41	392.21	1056.19	0.37	FAIL	
17825.00†	7150.51	-1382.30	-10030.60	17877.68	7146.50	-1776.99	-10017.26	-89.41	394.94	1066.25	0.37	FAIL	
17925.00†	7150.22	-1382.94	-10130.59	17977.64	7146.23	-1780.36	-10117.16	-89.42	397.67	1076.31	0.37	FAIL	
18000.13†	7150.00	-1383.43	-10205.72	18052.74	7146.04	-1782.90	-10192.22	-89.43	399.72	1083.86	0.37	FAIL	

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: DONN 32C-20-L PWB Offset Wellpath: DONN 32C-20-L PWP (REV-B.0)

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: DONN 32C-20-L PWB Offset Wellpath: DONN 32C-20-L PWP (REV-B.0)

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
13.5in Open Hole	25.00	1750.00	1725.00	25.00	1716.54	-24.43	-0.17	-103.36	43.37
9.625in Casing Surface	25.00	1750.00	1725.00	25.00	1716.54	-24.43	-0.17	-103.36	43.37
8.5in Open Hole	1750.00	18067.79	16317.79	1716.54	7146.00	-103.36	43.37	-555.80	-3111.26

SURVEY PROGRAM - Offset Wellbore: DONN 32C-20-L PWB Offset Wellpath: DONN 32C-20-L PWP (REV-B.0)

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
25.00	1750.00	Custom BHI NaviTrak (Standard Rotating+Axial Corr) (Rockies 0.03Gt model)		DONN 32C-20-L PWB
1750.00	18067.79	Custom BHI AutoTrak Curve (Short) (Rockies 0.03Gt model)		DONN 32C-20-L PWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: DONN 32C-20-L PWB Offset Wellpath: DONN 32C-20-L PWP (REV-B.0)

MD Reference: PRECISION DRILLING (25') (RKB)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	25.00ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 28 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DONN 32N-20B-L PWB Offset Wellpath: DONN 32N-20B-L PWP (REV-A.0)

Facility: SEC.21-T06N-R66W Slot: SLOT#24 DONN 32N-20B-L (958'FNL & 252'FEL, SEC.21) Well: DONN 32N-20B-L Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	25.00	25.00	-20.04	-0.28	-179.21	20.04	1.56	31.79	PASS	
125.00†	125.00	0.00	0.00	125.00	125.00	-20.04	-0.28	-179.21	20.04	1.89	20.59	PASS	
225.00†	225.00	0.00	0.00	225.00	225.00	-20.04	-0.28	-179.21	20.04	2.46	12.72	PASS	
300.00	300.00	0.00	0.00	300.00	300.00	-20.04	-0.28	-179.21	20.04	2.91	9.80	PASS	
325.00†	325.00	-0.09	0.06	324.85	324.85	-20.13	-0.22	37.02	20.04	3.06	9.10	PASS	
425.00†	424.96	-2.20	1.61	424.27	424.23	-22.31	1.17	37.45	20.13	4.05	6.20	PASS	
525.00†	524.77	-7.13	5.22	523.69	523.46	-27.41	4.40	38.42	20.34	5.57	4.20	PASS	
625.00†	624.30	-14.86	10.88	623.11	622.42	-35.41	9.47	39.92	20.68	6.74	3.42	PASS	
725.00†	723.44	-25.39	18.59	722.52	720.99	-46.30	16.38	41.88	21.17	7.72	2.99	PASS	
825.00†	822.07	-38.71	28.34	821.94	819.06	-60.08	25.12	44.23	21.82	8.60	2.73	PASS	
895.18	890.91	-49.71	36.39	891.71	887.51	-71.46	32.34	46.06	22.38	9.20	2.60	PASS	
925.00†	920.09	-54.67	40.02	921.36	916.50	-76.72	35.67	46.60	22.76	9.39	2.59	PASS	
1025.00†	1017.94	-71.32	52.20	1020.98	1013.47	-95.99	47.89	45.23	25.44	10.20	2.65	PASS	
1125.00†	1115.79	-87.96	64.39	1120.92	1110.63	-115.78	60.45	43.38	28.57	11.00	2.75	PASS	
1225.00†	1213.64	-104.60	76.57	1220.87	1207.78	-135.58	73.01	41.90	31.72	11.78	2.84	PASS	
1325.00†	1311.48	-121.25	88.76	1320.82	1304.94	-155.38	85.56	40.68	34.90	12.56	2.93	PASS	
1425.00†	1409.33	-137.89	100.94	1420.77	1402.10	-175.17	98.12	39.67	38.08	13.37	2.99	PASS	
1525.00†	1507.18	-154.53	113.12	1520.71	1499.26	-194.97	110.68	38.81	41.28	14.17	3.05	PASS	
1625.00†	1605.03	-171.18	125.31	1620.66	1596.42	-214.77	123.23	38.08	44.48	14.97	3.11	PASS	
1725.00†	1702.88	-187.82	137.49	1720.61	1693.58	-234.56	135.79	37.45	47.69	15.78	3.15	PASS	
1825.00†	1800.73	-204.47	149.67	1820.55	1790.74	-254.36	148.34	36.90	50.90	15.97	3.29	PASS	
1925.00†	1898.58	-221.11	161.86	1920.50	1887.90	-274.16	160.90	36.41	54.12	16.10	3.47	PASS	
2025.00†	1996.43	-237.75	174.04	2020.45	1985.06	-293.95	173.46	35.97	57.34	16.31	3.63	PASS	
2125.00†	2094.28	-254.40	186.22	2120.40	2082.22	-313.75	186.01	35.59	60.57	16.60	3.77	PASS	
2225.00†	2192.13	-271.04	198.41	2220.34	2179.37	-333.55	198.57	35.24	63.79	16.97	3.88	PASS	
2325.00†	2289.98	-287.68	210.59	2320.29	2276.53	-353.34	211.13	34.92	67.02	17.41	3.97	PASS	
2425.00†	2387.83	-304.33	222.77	2420.24	2373.69	-373.14	223.68	34.64	70.25	17.92	4.04	PASS	
2525.00†	2485.68	-320.97	234.96	2520.19	2470.85	-392.94	236.24	34.38	73.49	18.49	4.09	PASS	
2625.00†	2583.53	-337.62	247.14	2620.13	2568.01	-412.73	248.80	34.14	76.72	19.12	4.13	PASS	
2725.00†	2681.38	-354.26	259.33	2720.08	2665.17	-432.53	261.35	33.92	79.96	19.80	4.15	PASS	
2825.00†	2779.23	-370.90	271.51	2820.03	2762.33	-452.33	273.91	33.72	83.19	20.53	4.16	PASS	
2925.00†	2877.08	-387.55	283.69	2919.97	2859.49	-472.12	286.46	33.53	86.43	21.29	4.16	PASS	
3025.00†	2974.93	-404.19	295.88	3019.92	2956.65	-491.92	299.02	33.36	89.67	22.09	4.16	PASS	
3125.00†	3072.78	-420.83	308.06	3119.87	3053.81	-511.71	311.58	33.20	92.91	22.92	4.15	PASS	
3225.00†	3170.63	-437.48	320.24	3219.82	3150.96	-531.51	324.13	33.05	96.15	23.79	4.14	PASS	
3325.00†	3268.48	-454.12	332.43	3319.76	3248.12	-551.31	336.69	32.91	99.39	24.67	4.12	PASS	
3425.00†	3366.33	-470.77	344.61	3419.71	3345.28	-571.10	349.25	32.78	102.63	25.58	4.10	PASS	
3525.00†	3464.18	-487.41	356.79	3519.66	3442.44	-590.90	361.80	32.65	105.87	26.52	4.07	PASS	
3625.00†	3562.03	-504.05	368.98	3619.60	3539.60	-610.70	374.36	32.53	109.11	27.46	4.05	PASS	
3725.00†	3659.88	-520.70	381.16	3719.55	3636.76	-630.49	386.92	32.42	112.35	28.43	4.03	PASS	
3825.00†	3757.73	-537.34	393.34	3819.50	3733.92	-650.29	399.47	32.32	115.59	29.41	4.00	PASS	
3925.00†	3855.57	-553.98	405.53	3919.45	3831.08	-670.09	412.03	32.22	118.84	30.41	3.98	PASS	
4025.00†	3953.42	-570.63	417.71	4019.39	3928.24	-689.88	424.59	32.13	122.08	31.41	3.95	PASS	
4125.00†	4051.27	-587.27	429.90	4119.34	4025.40	-709.68	437.14	32.04	125.32	32.43	3.93	PASS	
4225.00†	4149.12	-603.92	442.08	4219.29	4122.55	-729.48	449.70	31.96	128.57	33.46	3.90	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 29 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DONN 32N-20B-L PWB Offset Wellpath: DONN 32N-20B-L PWP (REV-A.0)

Facility: SEC.21-T06N-R66W Slot: SLOT#24 DONN 32N-20B-L (958'FNL & 252'FEL, SEC.21) Well: DONN 32N-20B-L Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
4325.00†	4246.97	-620.56	454.26	4319.23	4219.71	-749.27	462.25	31.88	131.81	34.49	3.88	PASS	
4425.00†	4344.82	-637.20	466.45	4419.18	4316.87	-769.07	474.81	31.81	135.06	35.54	3.86	PASS	
4525.00†	4442.67	-653.85	478.63	4519.13	4414.03	-788.87	487.37	31.73	138.30	36.59	3.83	PASS	
4625.00†	4540.52	-670.49	490.81	4619.08	4511.19	-808.66	499.92	31.66	141.55	37.65	3.81	PASS	
4725.00†	4638.37	-687.13	503.00	4719.02	4608.35	-828.46	512.48	31.60	144.79	38.71	3.79	PASS	
4825.00†	4736.22	-703.78	515.18	4818.97	4705.51	-848.26	525.04	31.54	148.04	39.78	3.77	PASS	
4925.00†	4834.07	-720.42	527.36	4918.92	4802.67	-868.05	537.59	31.48	151.28	40.86	3.75	PASS	
5025.00†	4931.92	-737.07	539.55	5018.87	4899.83	-887.85	550.15	31.42	154.53	41.94	3.73	PASS	
5125.00†	5029.77	-753.71	551.73	5118.81	4996.99	-907.65	562.71	31.36	157.77	43.02	3.71	PASS	
5225.00†	5127.62	-770.35	563.91	5218.76	5094.15	-927.44	575.26	31.31	161.02	44.11	3.69	PASS	
5325.00†	5225.47	-787.00	576.10	5318.71	5191.30	-947.24	587.82	31.26	164.26	45.20	3.68	PASS	
5425.00†	5323.32	-803.64	588.28	5418.65	5288.46	-967.04	600.37	31.21	167.51	46.30	3.66	PASS	
5525.00†	5421.17	-820.28	600.47	5518.60	5385.62	-986.83	612.93	31.16	170.76	47.40	3.64	PASS	
5625.00†	5519.02	-836.93	612.65	5618.55	5482.78	-1006.63	625.49	31.12	174.00	48.50	3.63	PASS	
5725.00†	5616.87	-853.57	624.83	5718.50	5579.94	-1026.43	638.04	31.08	177.25	49.61	3.61	PASS	
5825.00†	5714.72	-870.22	637.02	5818.44	5677.10	-1046.22	650.60	31.03	180.50	50.72	3.60	PASS	
5925.00†	5812.57	-886.86	649.20	5918.39	5774.26	-1066.02	663.16	30.99	183.74	51.83	3.58	PASS	
6025.00†	5910.42	-903.50	661.38	6018.34	5871.42	-1085.82	675.71	30.95	186.99	52.94	3.57	PASS	
6125.00†	6008.27	-920.15	673.57	6118.28	5968.58	-1105.61	688.27	30.92	190.24	54.06	3.55	PASS	
6225.00†	6106.12	-936.79	685.75	6218.23	6065.74	-1125.41	700.83	30.88	193.48	55.18	3.54	PASS	
6325.00†	6203.97	-953.43	697.93	6318.18	6162.89	-1145.21	713.38	30.84	196.73	56.30	3.53	PASS	
6425.00†	6301.82	-970.08	710.12	6418.13	6260.05	-1165.00	725.94	30.81	199.98	57.42	3.51	PASS	
6525.00†	6399.66	-986.72	722.30	6518.08	6358.01	-1185.00	737.23	31.16	203.15	58.57	3.50	PASS	
6605.93	6478.85	-1000.19	732.16	6599.68	6437.20	-1201.39	736.98	34.03	205.53	59.67	3.47	PASS	
6625.00†	6497.54	-1003.38	734.20	6618.34	6455.40	-1205.20	735.47	27.77	206.18	59.94	3.47	PASS	
6725.00†	6595.97	-1020.39	735.57	6714.59	6548.10	-1224.79	719.07	-15.64	210.59	61.31	3.46	PASS	
6825.00†	6693.34	-1037.59	721.30	6808.35	6635.01	-1243.52	689.55	-41.42	216.37	62.42	3.49	PASS	
6925.00†	6787.24	-1054.57	691.74	6899.95	6714.86	-1261.07	648.42	-49.94	223.06	63.27	3.55	PASS	
7025.00†	6875.37	-1070.91	647.62	6989.70	6786.65	-1277.21	597.16	-52.45	230.17	64.29	3.61	PASS	
7125.00†	6955.55	-1086.20	590.03	7077.87	6849.57	-1291.73	537.22	-52.82	237.20	65.00	3.68	PASS	
7225.00†	7025.81	-1100.06	520.38	7164.76	6903.02	-1304.46	470.00	-52.42	243.72	66.19	3.71	PASS	
7325.00†	7084.42	-1112.16	440.40	7250.62	6946.51	-1315.29	396.84	-51.80	249.36	67.70	3.71	PASS	
7425.00†	7129.94	-1122.20	352.04	7335.70	6979.69	-1324.10	319.06	-51.23	253.82	69.67	3.67	PASS	
7525.00†	7161.25	-1129.93	257.49	7420.24	7002.28	-1330.80	237.93	-50.83	256.91	72.22	3.58	PASS	
7625.00†	7177.57	-1135.16	159.08	7504.47	7014.12	-1335.32	154.73	-50.64	258.46	75.34	3.45	PASS	
7682.94	7180.00	-1136.99	101.24	7553.22	7016.01	-1336.93	106.06	-50.65	258.63	77.35	3.37	PASS	
7725.00†	7179.88	-1138.00	59.19	7594.37	7015.78	-1337.90	64.91	-50.63	258.69	79.04	3.29	PASS	
7825.00†	7179.59	-1140.39	-40.78	7694.37	7015.18	-1340.27	-35.06	-50.57	258.87	83.38	3.12	PASS	
7925.00†	7179.29	-1142.78	-140.75	7794.37	7014.58	-1342.64	-135.03	-50.52	259.05	88.09	2.96	PASS	
8025.00†	7179.00	-1145.17	-240.72	7894.37	7013.98	-1345.01	-235.00	-50.46	259.23	93.12	2.80	PASS	
8125.00†	7178.71	-1147.56	-340.69	7994.37	7013.38	-1347.38	-334.97	-50.41	259.41	98.42	2.65	PASS	
8225.00†	7178.42	-1149.95	-440.66	8094.37	7012.77	-1349.74	-434.93	-50.35	259.59	103.94	2.51	PASS	
8325.00†	7178.13	-1152.34	-540.63	8194.37	7012.17	-1352.11	-534.90	-50.29	259.77	109.65	2.38	PASS	
8425.00†	7177.84	-1154.73	-640.61	8294.37	7011.57	-1354.48	-634.87	-50.24	259.95	115.52	2.26	PASS	
8525.00†	7177.55	-1157.12	-740.58	8394.37	7010.97	-1356.85	-734.84	-50.18	260.13	121.52	2.15	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 30 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DONN 32N-20B-L PWB Offset Wellpath: DONN 32N-20B-L PWP (REV-A.0)

Facility: SEC.21-T06N-R66W Slot: SLOT#24 DONN 32N-20B-L (958'FNL & 252'FEL, SEC.21) Well: DONN 32N-20B-L Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
8625.00†	7177.25	-1159.52	-840.55	8494.37	7010.37	-1359.22	-834.81	-50.13	260.31	127.63	2.05	PASS	
8725.00†	7176.96	-1161.91	-940.52	8594.37	7009.77	-1361.58	-934.78	-50.07	260.50	133.84	1.95	PASS	
8825.00†	7176.67	-1164.30	-1040.49	8694.37	7009.17	-1363.95	-1034.75	-50.02	260.68	140.12	1.86	PASS	
8925.00†	7176.38	-1166.69	-1140.46	8794.37	7008.57	-1366.32	-1134.72	-49.96	260.86	146.48	1.78	PASS	
9025.00†	7176.09	-1169.08	-1240.43	8894.37	7007.96	-1368.69	-1234.69	-49.91	261.04	152.89	1.71	PASS	
9125.00†	7175.80	-1171.47	-1340.40	8994.37	7007.36	-1371.06	-1334.66	-49.85	261.22	159.36	1.64	PASS	
9225.00†	7175.51	-1173.86	-1440.37	9094.36	7006.76	-1373.43	-1434.63	-49.79	261.41	165.87	1.58	PASS	
9325.00†	7175.21	-1176.25	-1540.34	9194.36	7006.16	-1375.79	-1534.60	-49.74	261.59	172.41	1.52	PASS	
9425.00†	7174.92	-1178.64	-1640.32	9294.36	7005.56	-1378.16	-1634.57	-49.68	261.77	178.99	1.46	PASS	
9525.00†	7174.63	-1181.03	-1740.29	9394.36	7004.96	-1380.53	-1734.54	-49.63	261.96	185.59	1.41	PASS	
9625.00†	7174.34	-1183.42	-1840.26	9494.36	7004.36	-1382.90	-1834.51	-49.58	262.14	192.22	1.37	PASS	
9725.00†	7174.05	-1185.82	-1940.23	9594.36	7003.76	-1385.27	-1934.48	-49.52	262.32	198.86	1.32	PASS	
9825.00†	7173.76	-1188.21	-2040.20	9694.36	7003.15	-1387.63	-2034.45	-49.47	262.51	205.52	1.28	PASS	
9925.00†	7173.47	-1190.60	-2140.17	9794.36	7002.55	-1390.00	-2134.42	-49.41	262.69	212.20	1.24	PASS	
10025.00†	7173.17	-1192.99	-2240.14	9894.36	7001.95	-1392.37	-2234.39	-49.36	262.88	218.89	1.20	PASS	
10125.00†	7172.88	-1195.38	-2340.11	9994.36	7001.35	-1394.74	-2334.36	-49.30	263.06	225.58	1.17	PASS	
10225.00†	7172.59	-1197.77	-2440.08	10094.36	7000.75	-1397.11	-2434.33	-49.25	263.25	232.29	1.13	PASS	
10325.00†	7172.30	-1200.16	-2540.05	10194.36	7000.15	-1399.47	-2534.30	-49.19	263.43	239.00	1.10	PASS	
10425.00†	7172.01	-1202.55	-2640.03	10294.36	6999.55	-1401.84	-2634.27	-49.14	263.62	245.71	1.07	PASS	
10525.00†	7171.72	-1204.94	-2740.00	10394.36	6998.94	-1404.21	-2734.24	-49.09	263.80	252.43	1.05	PASS	
10625.00†	7171.42	-1207.33	-2839.97	10494.36	6998.34	-1406.58	-2834.21	-49.03	263.99	259.16	1.02	PASS	
10725.00†	7171.13	-1209.72	-2939.94	10594.36	6997.74	-1408.95	-2934.18	-48.98	264.17	265.88	0.99	FAIL	
10825.00†	7170.84	-1212.11	-3039.91	10694.36	6997.14	-1411.31	-3034.15	-48.92	264.36	272.60	0.97	FAIL	
10925.00†	7170.55	-1214.51	-3139.88	10794.36	6996.54	-1413.68	-3134.12	-48.87	264.55	279.33	0.95	FAIL	
11025.00†	7170.26	-1216.90	-3239.85	10894.36	6995.94	-1416.05	-3234.09	-48.82	264.73	286.05	0.93	FAIL	
11125.00†	7169.97	-1219.29	-3339.82	10994.36	6995.34	-1418.42	-3334.06	-48.76	264.92	292.77	0.90	FAIL	
11225.00†	7169.68	-1221.68	-3439.79	11094.36	6994.74	-1420.79	-3434.02	-48.71	265.11	299.49	0.88	FAIL	
11325.00†	7169.38	-1224.07	-3539.76	11194.35	6994.13	-1423.16	-3533.99	-48.66	265.29	306.21	0.87	FAIL	
11425.00†	7169.09	-1226.46	-3639.74	11294.35	6993.53	-1425.52	-3633.96	-48.60	265.48	312.92	0.85	FAIL	
11525.00†	7168.80	-1228.85	-3739.71	11394.35	6992.93	-1427.89	-3733.93	-48.55	265.67	319.63	0.83	FAIL	
11625.00†	7168.51	-1231.24	-3839.68	11494.35	6992.33	-1430.26	-3833.90	-48.49	265.86	326.34	0.81	FAIL	
11725.00†	7168.22	-1233.63	-3939.65	11594.35	6991.73	-1432.63	-3933.87	-48.44	266.05	333.04	0.80	FAIL	
11825.00†	7167.93	-1236.02	-4039.62	11694.35	6991.13	-1435.00	-4033.84	-48.39	266.24	339.74	0.78	FAIL	
11925.00†	7167.64	-1238.41	-4139.59	11794.35	6990.53	-1437.36	-4133.81	-48.34	266.42	346.43	0.77	FAIL	
12025.00†	7167.34	-1240.81	-4239.56	11894.35	6989.92	-1439.73	-4233.78	-48.28	266.61	353.12	0.75	FAIL	
12125.00†	7167.05	-1243.20	-4339.53	11994.35	6989.32	-1442.10	-4333.75	-48.23	266.80	359.80	0.74	FAIL	
12225.00†	7166.76	-1245.59	-4439.50	12094.35	6988.72	-1444.47	-4433.72	-48.18	266.99	366.47	0.73	FAIL	
12325.00†	7166.47	-1247.98	-4539.47	12194.35	6988.12	-1446.84	-4533.69	-48.12	267.18	373.14	0.72	FAIL	
12425.00†	7166.18	-1250.37	-4639.45	12294.35	6987.52	-1449.20	-4633.66	-48.07	267.37	379.80	0.70	FAIL	
12525.00†	7165.89	-1252.76	-4739.42	12394.35	6986.92	-1451.57	-4733.63	-48.02	267.56	386.45	0.69	FAIL	
12625.00†	7165.60	-1255.15	-4839.39	12494.35	6986.32	-1453.94	-4833.60	-47.97	267.75	393.10	0.68	FAIL	
12725.00†	7165.30	-1257.54	-4939.36	12594.35	6985.72	-1456.31	-4933.57	-47.91	267.94	399.74	0.67	FAIL	
12825.00†	7165.01	-1259.93	-5039.33	12694.35	6985.11	-1458.68	-5033.54	-47.86	268.13	406.38	0.66	FAIL	
12925.00†	7164.72	-1262.32	-5139.30	12794.35	6984.51	-1461.04	-5133.51	-47.81	268.33	413.00	0.65	FAIL	
13025.00†	7164.43	-1264.71	-5239.27	12894.35	6983.91	-1463.41	-5233.48	-47.76	268.52	419.62	0.64	FAIL	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 31 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DONN 32N-20B-L PWB Offset Wellpath: DONN 32N-20B-L PWP (REV-A.0)

Facility: SEC.21-T06N-R66W Slot: SLOT#24 DONN 32N-20B-L (958'FNL & 252'FEL, SEC.21) Well: DONN 32N-20B-L Threshold Value=1.00 † = Interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
13125.00†	7164.14	-1267.10	-5339.24	12994.35	6983.31	-1465.78	-5333.45	-47.70	268.71	426.24	0.63	FAIL	
13225.00†	7163.85	-1269.50	-5439.21	13094.35	6982.71	-1468.15	-5433.42	-47.65	268.90	432.84	0.62	FAIL	
13325.00†	7163.56	-1271.89	-5539.18	13194.35	6982.11	-1470.52	-5533.39	-47.60	269.09	439.44	0.61	FAIL	
13425.00†	7163.26	-1274.28	-5639.16	13294.34	6981.51	-1472.88	-5633.36	-47.55	269.28	446.03	0.60	FAIL	
13525.00†	7162.97	-1276.67	-5739.13	13394.34	6980.91	-1475.25	-5733.33	-47.50	269.48	452.61	0.59	FAIL	
13625.00†	7162.68	-1279.06	-5839.10	13494.34	6980.30	-1477.62	-5833.30	-47.44	269.67	459.18	0.59	FAIL	
13725.00†	7162.39	-1281.45	-5939.07	13594.34	6979.70	-1479.99	-5933.27	-47.39	269.86	465.74	0.58	FAIL	
13825.00†	7162.10	-1283.84	-6039.04	13694.34	6979.10	-1482.36	-6033.24	-47.34	270.06	472.30	0.57	FAIL	
13925.00†	7161.81	-1286.23	-6139.01	13794.34	6978.50	-1484.73	-6133.21	-47.29	270.25	478.85	0.56	FAIL	
14025.00†	7161.51	-1288.62	-6238.98	13894.34	6977.90	-1487.09	-6233.18	-47.24	270.44	485.39	0.56	FAIL	
14032.94	7161.49	-1288.81	-6246.92	13902.28	6977.85	-1487.28	-6241.11	-47.23	270.46	485.91	0.56	FAIL	
14125.00†	7161.22	-1288.79	-6338.97	13994.31	6977.30	-1489.46	-6333.11	-47.46	272.27	494.09	0.55	FAIL	
14211.94	7160.97	-1284.71	-6425.81	14081.02	6976.78	-1491.51	-6419.80	-48.17	277.01	505.69	0.55	FAIL	
14225.00†	7160.93	-1283.79	-6438.83	14094.02	6976.70	-1491.82	-6432.80	-48.34	277.95	507.69	0.55	FAIL	
14325.00†	7160.64	-1276.82	-6538.59	14193.59	6976.10	-1494.18	-6532.33	-49.53	285.20	522.84	0.54	FAIL	
14411.94	7160.39	-1270.75	-6625.32	14280.15	6975.58	-1496.23	-6618.87	-50.53	291.61	535.72	0.54	FAIL	
14425.00†	7160.35	-1269.89	-6638.35	14293.15	6975.50	-1496.54	-6631.87	-50.69	292.54	537.59	0.54	FAIL	
14525.00†	7160.06	-1266.21	-6738.27	14392.96	6974.90	-1498.90	-6731.64	-51.48	297.44	549.47	0.54	FAIL	
14625.00†	7159.76	-1267.77	-6838.25	14492.94	6974.30	-1501.27	-6831.60	-51.55	298.27	557.12	0.53	FAIL	
14725.00†	7159.47	-1274.55	-6938.00	14592.83	6973.70	-1503.63	-6931.46	-50.92	295.01	560.40	0.53	FAIL	
14825.00†	7159.17	-1286.55	-7037.27	14692.36	6973.10	-1505.99	-7030.95	-49.53	287.78	558.64	0.51	FAIL	
14925.00†	7158.88	-1303.73	-7135.77	14791.24	6972.51	-1508.33	-7129.80	-47.28	276.83	550.49	0.50	FAIL	
14937.60	7158.84	-1306.26	-7148.12	14803.64	6972.43	-1508.63	-7142.20	-46.93	275.21	548.91	0.50	FAIL	
15025.00†	7158.59	-1324.09	-7233.68	14889.60	6971.91	-1510.66	-7228.13	-44.57	263.99	536.18	0.49	FAIL	
15037.60	7158.55	-1326.66	-7246.02	14901.99	6971.84	-1510.96	-7240.53	-44.21	262.41	534.12	0.49	FAIL	
15125.00†	7158.30	-1342.52	-7331.95	14988.28	6971.32	-1513.00	-7326.79	-42.14	253.08	520.97	0.49	FAIL	
15225.00†	7158.01	-1355.83	-7431.05	15087.67	6970.72	-1515.35	-7426.14	-40.36	246.06	510.61	0.48	FAIL	
15325.00†	7157.72	-1363.93	-7530.71	15187.49	6970.12	-1517.72	-7525.94	-39.35	242.62	507.17	0.48	FAIL	
15417.62	7157.45	-1366.77	-7623.28	15280.10	6969.57	-1519.91	-7618.52	-39.19	242.43	511.32	0.47	FAIL	
15425.00†	7157.43	-1366.82	-7630.66	15287.48	6969.52	-1520.08	-7625.89	-39.21	242.53	511.95	0.47	FAIL	
15525.00†	7157.14	-1367.46	-7730.65	15387.46	6968.92	-1522.45	-7725.85	-39.47	243.86	520.45	0.47	FAIL	
15625.00†	7156.85	-1368.11	-7830.65	15487.45	6968.32	-1524.82	-7825.80	-39.74	245.20	528.98	0.46	FAIL	
15725.00†	7156.56	-1368.75	-7930.65	15587.43	6967.72	-1527.19	-7925.76	-40.00	246.55	537.53	0.46	FAIL	
15825.00†	7156.27	-1369.40	-8030.65	15687.42	6967.12	-1529.56	-8025.71	-40.26	247.90	546.11	0.45	FAIL	
15925.00†	7155.98	-1370.04	-8130.64	15787.40	6966.52	-1531.92	-8125.67	-40.51	249.25	554.71	0.45	FAIL	
16025.00†	7155.70	-1370.69	-8230.64	15887.38	6965.91	-1534.29	-8225.62	-40.77	250.61	563.34	0.44	FAIL	
16125.00†	7155.41	-1371.33	-8330.64	15987.37	6965.31	-1536.66	-8325.58	-41.02	251.98	571.98	0.44	FAIL	
16225.00†	7155.12	-1371.98	-8430.64	16087.35	6964.71	-1539.03	-8425.53	-41.26	253.35	580.65	0.44	FAIL	
16325.00†	7154.83	-1372.62	-8530.63	16187.34	6964.11	-1541.39	-8525.49	-41.51	254.72	589.35	0.43	FAIL	
16425.00†	7154.54	-1373.27	-8630.63	16287.32	6963.51	-1543.76	-8625.44	-41.75	256.10	598.06	0.43	FAIL	
16525.00†	7154.25	-1373.91	-8730.63	16387.31	6962.91	-1546.13	-8725.40	-41.99	257.49	606.79	0.42	FAIL	
16625.00†	7153.97	-1374.56	-8830.63	16487.29	6962.31	-1548.50	-8825.35	-42.23	258.87	615.54	0.42	FAIL	
16725.00†	7153.68	-1375.20	-8930.62	16587.28	6961.71	-1550.86	-8925.31	-42.46	260.27	624.31	0.42	FAIL	
16825.00†	7153.39	-1375.85	-9030.62	16687.26	6961.10	-1553.23	-9025.26	-42.70	261.66	633.10	0.41	FAIL	
16925.00†	7153.10	-1376.49	-9130.62	16787.25	6960.50	-1555.60	-9125.22	-42.93	263.06	641.91	0.41	FAIL	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 32 of 202

**BAKER
HUGHES**
a GE company



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DONN 32N-20B-L PWB Offset Wellpath: DONN 32N-20B-L PWP (REV-A.0)

Facility: SEC.21-T06N-R66W Slot: SLOT#24 DONN 32N-20B-L (958'FNL & 252'FEL, SEC.21) Well: DONN 32N-20B-L Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
17025.00†	7152.81	-1377.14	-9230.62	16887.23	6959.90	-1557.97	-9225.17	-43.15	264.47	650.73	0.41	FAIL	
17125.00†	7152.52	-1377.78	-9330.61	16987.22	6959.30	-1560.34	-9325.13	-43.38	265.88	659.57	0.40	FAIL	
17225.00†	7152.24	-1378.43	-9430.61	17087.20	6958.70	-1562.70	-9425.08	-43.60	267.29	668.43	0.40	FAIL	
17325.00†	7151.95	-1379.07	-9530.61	17187.19	6958.10	-1565.07	-9525.04	-43.82	268.71	677.30	0.40	FAIL	
17425.00†	7151.66	-1379.72	-9630.61	17287.17	6957.50	-1567.44	-9624.99	-44.04	270.13	686.18	0.39	FAIL	
17525.00†	7151.37	-1380.36	-9730.60	17387.15	6956.90	-1569.81	-9724.95	-44.25	271.55	695.09	0.39	FAIL	
17625.00†	7151.08	-1381.01	-9830.60	17487.14	6956.29	-1572.17	-9824.90	-44.47	272.98	704.00	0.39	FAIL	
17725.00†	7150.79	-1381.65	-9930.60	17587.12	6955.69	-1574.54	-9924.86	-44.68	274.41	712.93	0.38	FAIL	
17825.00†	7150.51	-1382.30	-10030.60	17687.11	6955.09	-1576.91	-10024.81	-44.89	275.85	721.87	0.38	FAIL	
17925.00†	7150.22	-1382.94	-10130.59	17787.09	6954.49	-1579.28	-10124.76	-45.09	277.29	730.83	0.38	FAIL	
18000.13†	7150.00	-1383.43	-10205.72	17862.21	6954.04	-1581.06	-10199.86	-45.25	278.37	737.56	0.38	FAIL	

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: DONN 32N-20B-L PWB Offset Wellpath: DONN 32N-20B-L PWP (REV-A.0)

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: DONN 32N-20B-L PWB Offset Wellpath: DONN 32N-20B-L PWP (REV-A.0)

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
13.5in Open Hole	25.00	1750.00	1725.00	25.00	1722.15	-12.21	-0.17	-79.38	42.43
9.625in Casing Surface	25.00	1750.00	1725.00	25.00	1722.15	-12.21	-0.17	-79.38	42.43
8.5in Open Hole	1750.00	17868.70	16118.70	1722.15	N/A	-79.38	42.43	N/A	N/A

SURVEY PROGRAM - Offset Wellbore: DONN 32N-20B-L PWB Offset Wellpath: DONN 32N-20B-L PWP (REV-A.0)

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
25.00	1750.00	Custom BHI NaviTrak (Standard Rotating+Axial Corr) (Rockies 0.03Gt model)		DONN 32N-20B-L PWB
1750.00	17868.70	Custom BHI AutoTrak Curve (IFR1, Short) (Rockies 0.03Gt model)		DONN 32N-20B-L PWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: DONN 32N-20B-L PWB Offset Wellpath: DONN 32N-20B-L PWP (REV-A.0)

MD Reference: PRECISION DRILLING (25') (RKB)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	25.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 33 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. LINDBLAD 22-20AWB Offset Wellpath: EX. LINDBLAD 22-20AWP

Facility: SEC.20-T06N-R66W Slot: SLOT#02 EX. LINDBLAD 22-20 (1915'FNL & 2267'FWL, PR, CODL) Well: EX. LINDBLAD 22-20 Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	-8.00	25.00	-1126.24	-8069.22	-97.95	8147.44	25.57	331.13	PASS	
125.00†	125.00	0.00	0.00	92.00	125.00	-1126.24	-8069.22	-97.95	8147.44	25.57	331.10	PASS	
225.00†	225.00	0.00	0.00	192.00	225.00	-1126.24	-8069.22	-97.95	8147.44	25.57	331.01	PASS	
300.00	300.00	0.00	0.00	267.00	300.00	-1126.24	-8069.22	-97.95	8147.44	25.58	330.90	PASS	
325.00†	325.00	-0.09	0.06	292.00	325.00	-1126.24	-8069.22	118.26	8147.49	25.59	330.86	PASS	
425.00†	424.96	-2.20	1.61	391.96	424.96	-1126.24	-8069.22	118.25	8148.73	25.60	330.67	PASS	
525.00†	524.77	-7.13	5.22	491.77	524.77	-1126.24	-8069.22	118.24	8151.62	25.64	330.33	PASS	
625.00†	624.30	-14.86	10.88	591.30	624.30	-1126.24	-8069.22	118.22	8156.17	25.68	330.01	PASS	
725.00†	723.44	-25.39	18.59	690.44	723.44	-1126.24	-8069.22	118.19	8162.38	25.72	329.68	PASS	
825.00†	822.07	-38.71	28.34	789.07	822.07	-1126.24	-8069.22	118.15	8170.26	25.77	329.34	PASS	
895.18	890.91	-49.71	36.39	857.91	890.91	-1126.24	-8069.22	118.12	8176.79	25.80	329.12	PASS	
925.00†	920.09	-54.67	40.02	887.09	920.09	-1126.24	-8069.22	118.16	8179.74	25.82	329.05	PASS	
1025.00†	1017.94	-71.32	52.20	984.94	1017.94	-1126.24	-8069.22	118.28	8189.65	25.87	328.83	PASS	
1125.00†	1115.79	-87.96	64.39	1082.79	1115.79	-1126.24	-8069.22	118.41	8199.61	25.92	328.52	PASS	
1225.00†	1213.64	-104.60	76.57	1180.64	1213.64	-1126.24	-8069.22	118.53	8209.61	25.98	328.13	PASS	
1325.00†	1311.48	-121.25	88.76	1278.48	1311.48	-1126.24	-8069.22	118.66	8219.65	26.05	327.67	PASS	
1425.00†	1409.33	-137.89	100.94	1376.33	1409.33	-1126.24	-8069.22	118.78	8229.72	26.12	327.13	PASS	
1525.00†	1507.18	-154.53	113.12	1474.18	1507.18	-1126.24	-8069.22	118.90	8239.84	26.19	326.53	PASS	
1625.00†	1605.03	-171.18	125.31	1572.03	1605.03	-1126.24	-8069.22	119.03	8249.99	26.28	325.86	PASS	
1725.00†	1702.88	-187.82	137.49	1669.88	1702.88	-1126.24	-8069.22	119.15	8260.19	26.37	325.13	PASS	
1825.00†	1800.73	-204.47	149.67	1767.73	1800.73	-1126.24	-8069.22	119.27	8270.42	26.47	324.78	PASS	
1925.00†	1898.58	-221.11	161.86	1865.58	1898.58	-1126.24	-8069.22	119.39	8280.69	26.21	324.74	PASS	
2025.00†	1996.43	-237.75	174.04	1963.43	1996.43	-1126.24	-8069.22	119.52	8291.01	26.25	324.52	PASS	
2125.00†	2094.28	-254.40	186.22	2061.28	2094.28	-1126.24	-8069.22	119.64	8301.35	26.32	324.14	PASS	
2225.00†	2192.13	-271.04	198.41	2159.13	2192.13	-1126.24	-8069.22	119.76	8311.74	26.39	323.60	PASS	
2325.00†	2289.98	-287.68	210.59	2256.98	2289.98	-1126.24	-8069.22	119.88	8322.17	26.48	322.89	PASS	
2425.00†	2387.83	-304.33	222.77	2354.83	2387.83	-1126.24	-8069.22	120.00	8332.63	26.58	322.03	PASS	
2525.00†	2485.68	-320.97	234.96	2452.68	2485.68	-1126.24	-8069.22	120.12	8343.13	26.70	321.02	PASS	
2625.00†	2583.53	-337.62	247.14	2550.53	2583.53	-1126.24	-8069.22	120.24	8353.67	26.82	319.86	PASS	
2725.00†	2681.38	-354.26	259.33	2648.38	2681.38	-1126.24	-8069.22	120.36	8364.25	26.96	318.56	PASS	
2825.00†	2779.23	-370.90	271.51	2746.23	2779.23	-1126.24	-8069.22	120.48	8374.86	27.11	317.13	PASS	
2925.00†	2877.08	-387.55	283.69	2844.08	2877.08	-1126.24	-8069.22	120.60	8385.51	27.28	315.58	PASS	
3025.00†	2974.93	-404.19	295.88	2941.93	2974.93	-1126.24	-8069.22	120.72	8396.20	27.45	313.91	PASS	
3125.00†	3072.78	-420.83	308.06	3039.78	3072.78	-1126.24	-8069.22	120.84	8406.93	27.64	312.12	PASS	
3225.00†	3170.63	-437.48	320.24	3137.63	3170.63	-1126.24	-8069.22	120.96	8417.69	27.84	310.23	PASS	
3325.00†	3268.48	-454.12	332.43	3235.48	3268.48	-1126.24	-8069.22	121.08	8428.49	28.05	308.25	PASS	
3425.00†	3366.33	-470.77	344.61	3333.33	3366.33	-1126.24	-8069.22	121.20	8439.32	28.27	306.17	PASS	
3525.00†	3464.18	-487.41	356.79	3431.18	3464.18	-1126.24	-8069.22	121.31	8450.20	28.50	304.02	PASS	
3625.00†	3562.03	-504.05	368.98	3529.03	3562.03	-1126.24	-8069.22	121.43	8461.11	28.74	301.79	PASS	
3725.00†	3659.88	-520.70	381.16	3626.88	3659.88	-1126.24	-8069.22	121.55	8472.05	28.99	299.49	PASS	
3825.00†	3757.73	-537.34	393.34	3724.73	3757.73	-1126.24	-8069.22	121.67	8483.03	29.26	297.14	PASS	
3925.00†	3855.57	-553.98	405.53	3822.57	3855.57	-1126.24	-8069.22	121.78	8494.05	29.53	294.73	PASS	
4025.00†	3953.42	-570.63	417.71	3920.42	3953.42	-1126.24	-8069.22	121.90	8505.10	29.81	292.27	PASS	
4125.00†	4051.27	-587.27	429.90	4018.27	4051.27	-1126.24	-8069.22	122.01	8516.19	30.09	289.78	PASS	
4225.00†	4149.12	-603.92	442.08	4116.12	4149.12	-1126.24	-8069.22	122.13	8527.31	30.39	287.25	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 34 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. LINDBLAD 22-20AWB Offset Wellpath: EX. LINDBLAD 22-20AWP

Facility: SEC.20-T06N-R66W Slot: SLOT#02 EX. LINDBLAD 22-20 (1915'FNL & 2267'FWL, PR, COOL) Well: EX. LINDBLAD 22-20 Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
4325.00†	4246.97	-620.56	454.26	4213.97	4246.97	-1126.24	-8069.22	122.25	8538.47	30.70	284.69	PASS	
4425.00†	4344.82	-637.20	466.45	4311.82	4344.82	-1126.24	-8069.22	122.36	8549.66	31.01	282.11	PASS	
4525.00†	4442.67	-653.85	478.63	4409.67	4442.67	-1126.24	-8069.22	122.48	8560.89	31.33	279.51	PASS	
4625.00†	4540.52	-670.49	490.81	4507.52	4540.52	-1126.24	-8069.22	122.59	8572.16	31.66	276.89	PASS	
4725.00†	4638.37	-687.13	503.00	4605.37	4638.37	-1126.24	-8069.22	122.70	8583.46	32.00	274.27	PASS	
4825.00†	4736.22	-703.78	515.18	4703.22	4736.22	-1126.24	-8069.22	122.82	8594.79	32.35	271.65	PASS	
4925.00†	4834.07	-720.42	527.36	4801.07	4834.07	-1126.24	-8069.22	122.93	8606.16	32.70	269.03	PASS	
5025.00†	4931.92	-737.07	539.55	4898.92	4931.92	-1126.24	-8069.22	123.05	8617.56	33.05	266.41	PASS	
5125.00†	5029.77	-753.71	551.73	4996.77	5029.77	-1126.24	-8069.22	123.16	8629.00	33.40	263.79	PASS	
5225.00†	5127.62	-770.35	563.91	5094.62	5127.62	-1126.24	-8069.22	123.27	8640.47	33.75	261.17	PASS	
5325.00†	5225.47	-787.00	576.10	5192.47	5225.47	-1126.24	-8069.22	123.38	8651.97	34.10	258.55	PASS	
5425.00†	5323.32	-803.64	588.28	5290.32	5323.32	-1126.24	-8069.22	123.50	8663.51	34.45	255.93	PASS	
5525.00†	5421.17	-820.28	600.47	5388.17	5421.17	-1126.24	-8069.22	123.61	8675.08	34.80	253.31	PASS	
5625.00†	5519.02	-836.93	612.65	5486.02	5519.02	-1126.24	-8069.22	123.72	8686.69	35.15	250.69	PASS	
5725.00†	5616.87	-853.57	624.83	5583.87	5616.87	-1126.24	-8069.22	123.83	8698.33	35.50	248.07	PASS	
5825.00†	5714.72	-870.22	637.02	5681.72	5714.72	-1126.24	-8069.22	123.94	8710.00	35.85	245.45	PASS	
5925.00†	5812.57	-886.86	649.20	5779.57	5812.57	-1126.24	-8069.22	124.05	8721.71	36.20	242.83	PASS	
6025.00†	5910.42	-903.50	661.38	5877.42	5910.42	-1126.24	-8069.22	124.16	8733.44	36.55	240.21	PASS	
6125.00†	6008.27	-920.15	673.57	5975.27	6008.27	-1126.24	-8069.22	124.27	8745.22	36.90	237.59	PASS	
6225.00†	6106.12	-936.79	685.75	6073.12	6106.12	-1126.24	-8069.22	124.38	8757.02	37.25	234.97	PASS	
6325.00†	6203.97	-953.43	697.93	6170.97	6203.97	-1126.24	-8069.22	124.49	8768.86	37.60	232.35	PASS	
6425.00†	6301.82	-970.08	710.12	6268.82	6301.82	-1126.24	-8069.22	124.60	8780.73	37.95	229.73	PASS	
6525.00†	6399.66	-986.72	722.30	6366.66	6399.66	-1126.24	-8069.22	124.71	8792.63	38.30	227.11	PASS	
6605.93	6478.85	-1000.19	732.16	6445.85	6478.85	-1126.24	-8069.22	124.80	8802.28	38.65	224.49	PASS	
6625.00†	6497.54	-1003.38	734.20	6464.54	6497.54	-1126.24	-8069.22	117.53	8804.28	119.50	74.11	PASS	
6725.00†	6595.97	-1020.39	735.57	6562.97	6595.97	-1126.24	-8069.22	68.97	8805.42	124.29	71.25	PASS	
6825.00†	6693.34	-1037.59	721.30	6660.34	6693.34	-1126.24	-8069.22	38.50	8790.96	129.53	68.24	PASS	
6925.00†	6787.24	-1054.57	691.74	6754.24	6787.24	-1126.24	-8069.22	25.83	8761.25	134.66	65.40	PASS	
7025.00†	6875.37	-1070.91	647.62	6842.37	6875.37	-1126.24	-8069.22	19.79	8717.02	139.33	62.88	PASS	
7125.00†	6955.55	-1086.20	590.03	6922.55	6955.55	-1126.24	-8069.22	16.54	8659.34	143.47	60.65	PASS	
7225.00†	7025.81	-1100.06	520.38	6992.81	7025.81	-1126.24	-8069.22	14.75	8589.64	147.02	58.70	PASS	
7325.00†	7084.42	-1112.16	440.40	7051.42	7084.42	-1126.24	-8069.22	13.95	8509.63	149.91	57.03	PASS	
7425.00†	7129.94	-1122.20	352.04	7096.94	7129.94	-1126.24	-8069.22	14.07	8421.27	152.11	55.62	PASS	
7525.00†	7161.25	-1129.93	257.49	7128.25	7161.25	-1126.24	-8069.22	15.79	8326.72	153.59	54.46	PASS	
7625.00†	7177.57	-1135.16	159.08	7144.57	7177.57	-1126.24	-8069.22	25.09	8228.30	154.34	53.55	PASS	
7682.94	7180.00	-1136.99	101.24	7147.00	7180.00	-1126.24	-8069.22	96.59	8170.47	154.45	53.14	PASS	
7725.00†	7179.88	-1138.00	59.19	7146.88	7179.88	-1126.24	-8069.22	96.56	8128.42	154.45	52.87	PASS	
7825.00†	7179.59	-1140.39	-40.78	7146.59	7179.59	-1126.24	-8069.22	96.48	8028.45	154.44	52.22	PASS	
7925.00†	7179.29	-1142.78	-140.75	7146.29	7179.29	-1126.24	-8069.22	96.40	7928.49	154.44	51.57	PASS	
8025.00†	7179.00	-1145.17	-240.72	7146.00	7179.00	-1126.24	-8069.22	96.32	7828.52	154.43	50.92	PASS	
8125.00†	7178.71	-1147.56	-340.69	7145.71	7178.71	-1126.24	-8069.22	96.24	7728.56	154.43	50.27	PASS	
8225.00†	7178.42	-1149.95	-440.66	7145.42	7178.42	-1126.24	-8069.22	96.16	7628.59	154.43	49.62	PASS	
8325.00†	7178.13	-1152.34	-540.63	7145.13	7178.13	-1126.24	-8069.22	96.08	7528.63	154.43	48.97	PASS	
8425.00†	7177.84	-1154.73	-640.61	7144.84	7177.84	-1126.24	-8069.22	96.00	7428.67	154.43	48.32	PASS	
8525.00†	7177.55	-1157.12	-740.58	7144.55	7177.55	-1126.24	-8069.22	95.92	7328.71	154.44	47.67	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 35 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. LINDBLAD 22-20AWB Offset Wellpath: EX. LINDBLAD 22-20AWP

Facility: SEC.20-T06N-R66W		Slot: SLOT#02 EX. LINDBLAD 22-20 (1915'FNL & 2267'FWL, PR, CODL)		Well: EX. LINDBLAD 22-20		Threshold Value=1.00		† = interpolated/extrapolated station					
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
8625.00†	7177.25	-1159.52	-840.55	7144.25	7177.25	-1126.24	-8069.22	95.84	7228.75	154.44	47.02	PASS	
8725.00†	7176.96	-1161.91	-940.52	7143.96	7176.96	-1126.24	-8069.22	95.76	7128.79	154.45	46.36	PASS	
8825.00†	7176.67	-1164.30	-1040.49	7143.67	7176.67	-1126.24	-8069.22	95.67	7028.83	154.46	45.71	PASS	
8925.00†	7176.38	-1166.69	-1140.46	7143.38	7176.38	-1126.24	-8069.22	95.59	6928.88	154.48	45.06	PASS	
9025.00†	7176.09	-1169.08	-1240.43	7143.09	7176.09	-1126.24	-8069.22	95.51	6828.92	154.49	44.40	PASS	
9125.00†	7175.80	-1171.47	-1340.40	7142.80	7175.80	-1126.24	-8069.22	95.43	6728.97	154.51	43.75	PASS	
9225.00†	7175.51	-1173.86	-1440.37	7142.51	7175.51	-1126.24	-8069.22	95.35	6629.02	154.53	43.09	PASS	
9325.00†	7175.21	-1176.25	-1540.34	7142.21	7175.21	-1126.24	-8069.22	95.27	6529.07	154.55	42.44	PASS	
9425.00†	7174.92	-1178.64	-1640.32	7141.92	7174.92	-1126.24	-8069.22	95.19	6429.12	154.57	41.78	PASS	
9525.00†	7174.63	-1181.03	-1740.29	7141.63	7174.63	-1126.24	-8069.22	95.11	6329.17	154.60	41.12	PASS	
9625.00†	7174.34	-1183.42	-1840.26	7141.34	7174.34	-1126.24	-8069.22	95.03	6229.23	154.63	40.47	PASS	
9725.00†	7174.05	-1185.82	-1940.23	7141.05	7174.05	-1126.24	-8069.22	94.95	6129.28	154.66	39.81	PASS	
9825.00†	7173.76	-1188.21	-2040.20	7140.76	7173.76	-1126.24	-8069.22	94.87	6029.34	154.70	39.15	PASS	
9925.00†	7173.47	-1190.60	-2140.17	7140.47	7173.47	-1126.24	-8069.22	94.79	5929.40	154.74	38.49	PASS	
10025.00†	7173.17	-1192.99	-2240.14	7140.17	7173.17	-1126.24	-8069.22	94.71	5829.46	154.78	37.83	PASS	
10125.00†	7172.88	-1195.38	-2340.11	7139.88	7172.88	-1126.24	-8069.22	94.63	5729.53	154.82	37.17	PASS	
10225.00†	7172.59	-1197.77	-2440.08	7139.59	7172.59	-1126.24	-8069.22	94.55	5629.59	154.87	36.51	PASS	
10325.00†	7172.30	-1200.16	-2540.05	7139.30	7172.30	-1126.24	-8069.22	94.47	5529.66	154.92	35.85	PASS	
10425.00†	7172.01	-1202.55	-2640.03	7139.01	7172.01	-1126.24	-8069.22	94.39	5429.73	154.98	35.19	PASS	
10525.00†	7171.72	-1204.94	-2740.00	7138.72	7171.72	-1126.24	-8069.22	94.31	5329.81	155.04	34.53	PASS	
10625.00†	7171.42	-1207.33	-2839.97	7138.42	7171.42	-1126.24	-8069.22	94.23	5229.88	155.11	33.87	PASS	
10725.00†	7171.13	-1209.72	-2939.94	7138.13	7171.13	-1126.24	-8069.22	94.15	5129.96	155.18	33.21	PASS	
10825.00†	7170.84	-1212.11	-3039.91	7137.84	7170.84	-1126.24	-8069.22	94.07	5030.04	155.25	32.54	PASS	
10925.00†	7170.55	-1214.51	-3139.88	7137.55	7170.55	-1126.24	-8069.22	93.99	4930.13	155.33	31.88	PASS	
11025.00†	7170.26	-1216.90	-3239.85	7137.26	7170.26	-1126.24	-8069.22	93.90	4830.22	155.42	31.22	PASS	
11125.00†	7169.97	-1219.29	-3339.82	7136.97	7169.97	-1126.24	-8069.22	93.82	4730.31	155.51	30.55	PASS	
11225.00†	7169.68	-1221.68	-3439.79	7136.68	7169.68	-1126.24	-8069.22	93.74	4630.41	155.61	29.89	PASS	
11325.00†	7169.38	-1224.07	-3539.76	7136.38	7169.38	-1126.24	-8069.22	93.66	4530.51	155.72	29.22	PASS	
11425.00†	7169.09	-1226.46	-3639.74	7136.09	7169.09	-1126.24	-8069.22	93.58	4430.62	155.83	28.56	PASS	
11525.00†	7168.80	-1228.85	-3739.71	7135.80	7168.80	-1126.24	-8069.22	93.50	4330.73	155.95	27.89	PASS	
11625.00†	7168.51	-1231.24	-3839.68	7135.51	7168.51	-1126.24	-8069.22	93.42	4230.85	156.09	27.22	PASS	
11725.00†	7168.22	-1233.63	-3939.65	7135.22	7168.22	-1126.24	-8069.22	93.34	4130.97	156.23	26.56	PASS	
11825.00†	7167.93	-1236.02	-4039.62	7134.93	7167.93	-1126.24	-8069.22	93.26	4031.10	156.38	25.89	PASS	
11925.00†	7167.64	-1238.41	-4139.59	7134.64	7167.64	-1126.24	-8069.22	93.18	3931.23	156.55	25.22	PASS	
12025.00†	7167.34	-1240.81	-4239.56	7134.34	7167.34	-1126.24	-8069.22	93.10	3831.37	156.73	24.55	PASS	
12125.00†	7167.05	-1243.20	-4339.53	7134.05	7167.05	-1126.24	-8069.22	93.02	3731.52	156.92	23.88	PASS	
12225.00†	7166.76	-1245.59	-4439.50	7133.76	7166.76	-1126.24	-8069.22	92.94	3631.68	157.13	23.21	PASS	
12325.00†	7166.47	-1247.98	-4539.47	7133.47	7166.47	-1126.24	-8069.22	92.86	3531.84	157.36	22.54	PASS	
12425.00†	7166.18	-1250.37	-4639.45	7133.18	7166.18	-1126.24	-8069.22	92.77	3432.02	157.60	21.87	PASS	
12525.00†	7165.89	-1252.76	-4739.42	7132.89	7165.89	-1126.24	-8069.22	92.69	3332.21	157.88	21.20	PASS	
12625.00†	7165.60	-1255.15	-4839.39	7132.60	7165.60	-1126.24	-8069.22	92.61	3232.40	158.17	20.52	PASS	
12725.00†	7165.30	-1257.54	-4939.36	7132.30	7165.30	-1126.24	-8069.22	92.53	3132.62	158.49	19.85	PASS	
12825.00†	7165.01	-1259.93	-5039.33	7132.01	7165.01	-1126.24	-8069.22	92.45	3032.84	158.85	19.17	PASS	
12925.00†	7164.72	-1262.32	-5139.30	7131.72	7164.72	-1126.24	-8069.22	92.37	2933.08	159.24	18.50	PASS	
13025.00†	7164.43	-1264.71	-5239.27	7131.43	7164.43	-1126.24	-8069.22	92.29	2833.34	159.67	17.82	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 36 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. LINDBLAD 22-20AWB Offset Wellpath: EX. LINDBLAD 22-20AWP

Facility: SEC.20-T06N-R66W		Slot: SLOT#02 EX. LINDBLAD 22-20		(1915'FNL & 2267'FWL, PR, CODL)		Well: EX. LINDBLAD 22-20		Threshold Value=1.00		† = interpolated/extrapolated station		
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status
13125.00†	7164.14	-1267.10	-5339.24	7131.14	7164.14	-1126.24	-8069.22	92.21	2733.61	160.15	17.14	PASS
13225.00†	7163.85	-1269.50	-5439.21	7130.85	7163.85	-1126.24	-8069.22	92.13	2633.91	160.68	16.46	PASS
13325.00†	7163.56	-1271.89	-5539.18	7130.56	7163.56	-1126.24	-8069.22	92.05	2534.23	161.28	15.78	PASS
13425.00†	7163.26	-1274.28	-5639.16	7130.26	7163.26	-1126.24	-8069.22	91.97	2434.57	161.94	15.10	PASS
13525.00†	7162.97	-1276.67	-5739.13	7129.97	7162.97	-1126.24	-8069.22	91.88	2334.95	162.69	14.41	PASS
13625.00†	7162.68	-1279.06	-5839.10	7129.68	7162.68	-1126.24	-8069.22	91.80	2235.35	163.53	13.72	PASS
13725.00†	7162.39	-1281.45	-5939.07	7129.39	7162.39	-1126.24	-8069.22	91.72	2135.80	164.48	13.04	PASS
13825.00†	7162.10	-1283.84	-6039.04	7129.10	7162.10	-1126.24	-8069.22	91.64	2036.29	165.56	12.35	PASS
13925.00†	7161.81	-1286.23	-6139.01	7128.81	7161.81	-1126.24	-8069.22	91.56	1936.83	166.80	11.66	PASS
14025.00†	7161.51	-1288.62	-6238.98	7128.51	7161.51	-1126.24	-8069.22	91.48	1837.43	168.22	10.96	PASS
14032.94	7161.49	-1288.81	-6246.92	7128.49	7161.49	-1126.24	-8069.22	91.47	1829.54	168.34	10.91	PASS
14125.00†	7161.22	-1288.79	-6338.97	7128.22	7161.22	-1126.24	-8069.22	92.40	1737.87	169.55	10.29	PASS
14211.94	7160.97	-1284.71	-6425.81	7127.97	7160.97	-1126.24	-8069.22	96.32	1651.04	170.21	9.74	PASS
14225.00†	7160.93	-1283.79	-6438.83	7127.93	7160.93	-1126.24	-8069.22	96.27	1637.98	170.27	9.66	PASS
14325.00†	7160.64	-1276.82	-6538.59	7127.64	7160.64	-1126.24	-8069.22	95.89	1538.02	170.75	9.04	PASS
14411.94	7160.39	-1270.75	-6625.32	7127.39	7160.39	-1126.24	-8069.22	95.56	1451.12	171.23	8.51	PASS
14425.00†	7160.35	-1269.89	-6638.35	7127.35	7160.35	-1126.24	-8069.22	94.50	1438.06	171.31	8.43	PASS
14525.00†	7160.06	-1266.21	-6738.27	7127.06	7160.06	-1126.24	-8069.22	91.78	1338.29	172.60	7.78	PASS
14625.00†	7159.76	-1267.77	-6838.25	7126.76	7159.76	-1126.24	-8069.22	91.07	1239.08	175.28	7.09	PASS
14725.00†	7159.47	-1274.55	-6938.00	7126.47	7159.47	-1126.24	-8069.22	90.74	1140.90	179.88	6.36	PASS
14825.00†	7159.17	-1286.55	-7037.27	7126.17	7159.17	-1126.24	-8069.22	90.54	1044.33	187.15	5.60	PASS
14925.00†	7158.88	-1303.73	-7135.77	7125.88	7158.88	-1126.24	-8069.22	90.41	950.17	198.10	4.81	PASS
14937.60	7158.84	-1306.26	-7148.12	7125.84	7158.84	-1126.24	-8069.22	90.40	938.53	199.79	4.71	PASS
15025.00†	7158.59	-1324.09	-7233.68	7125.59	7158.59	-1126.24	-8069.22	90.36	858.65	213.23	4.04	PASS
15037.60	7158.55	-1326.66	-7246.02	7125.55	7158.55	-1126.24	-8069.22	90.35	847.25	215.41	3.94	PASS
15125.00†	7158.30	-1342.52	-7331.95	7125.30	7158.30	-1126.24	-8069.22	90.35	768.34	231.71	3.32	PASS
15225.00†	7158.01	-1355.83	-7431.05	7125.01	7158.01	-1126.24	-8069.22	90.34	678.21	252.97	2.69	PASS
15325.00†	7157.72	-1363.93	-7530.71	7124.72	7157.72	-1126.24	-8069.22	90.33	588.64	277.79	2.12	PASS
15417.62	7157.45	-1366.77	-7623.28	7124.45	7157.45	-1126.24	-8069.22	90.30	506.68	305.14	1.66	PASS
15425.00†	7157.43	-1366.82	-7630.66	7124.43	7157.43	-1126.24	-8069.22	90.30	500.22	307.56	1.63	PASS
15525.00†	7157.14	-1367.46	-7730.65	7124.14	7157.14	-1126.24	-8069.22	90.23	415.71	346.26	1.20	PASS
15625.00†	7156.85	-1368.11	-7830.65	7123.85	7156.85	-1126.24	-8069.22	90.16	339.73	397.97	0.85	FAIL
15725.00†	7156.56	-1368.75	-7930.65	7123.56	7156.56	-1126.24	-8069.22	90.09	279.31	459.68	0.61	FAIL
15825.00†	7156.27	-1369.40	-8030.65	7123.27	7156.27	-1126.24	-8069.22	90.03	246.20	506.92	0.48	FAIL
15862.30†	7156.17	-1369.64	-8067.94	7123.58	7156.58	-1126.24	-8069.22	90.10	243.40	511.80	0.47	FAIL
15862.63†	7156.16	-1369.64	-8068.28	7123.16	7156.16	-1126.24	-8069.22	90.00	243.40	511.78	0.47	FAIL
15925.00†	7155.98	-1370.04	-8130.64	7122.98	7155.98	-1126.24	-8069.22	89.96	251.42	499.71	0.50	FAIL
16025.00†	7155.70	-1370.69	-8230.64	7122.70	7155.70	-1126.24	-8069.22	89.89	292.94	446.08	0.66	FAIL
16125.00†	7155.41	-1371.33	-8330.64	7122.41	7155.41	-1126.24	-8069.22	89.82	358.34	386.65	0.93	FAIL
16225.00†	7155.12	-1371.98	-8430.64	7122.12	7155.12	-1126.24	-8069.22	89.75	437.04	338.91	1.29	PASS
16325.00†	7154.83	-1372.62	-8530.63	7121.83	7154.83	-1126.24	-8069.22	89.69	523.07	303.42	1.73	PASS
16425.00†	7154.54	-1373.27	-8630.63	7121.54	7154.54	-1126.24	-8069.22	89.62	613.35	277.16	2.22	PASS
16525.00†	7154.25	-1373.91	-8730.63	7121.25	7154.25	-1126.24	-8069.22	89.55	706.26	257.38	2.75	PASS
16625.00†	7153.97	-1374.56	-8830.63	7120.97	7153.97	-1126.24	-8069.22	89.48	800.87	242.18	3.31	PASS
16725.00†	7153.68	-1375.20	-8930.62	7120.68	7153.68	-1126.24	-8069.22	89.41	896.66	230.27	3.90	PASS

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 37 of 202

**BAKER
HUGHES**
a GE company



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. LINDBLAD 22-20AWB Offset Wellpath: EX. LINDBLAD 22-20AWP

Facility: SEC.20-T06N-R66W				Slot: SLOT#02 EX. LINDBLAD 22-20 (1915'FNL & 2267'FWL, PR, CODL)				Well: EX. LINDBLAD 22-20		Threshold Value=1.00		† = interpolated/extrapolated station	
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
16825.00†	7153.39	-1375.85	-9030.62	7120.39	7153.39	-1126.24	-8069.22	89.35	993.27	220.75	4.51	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: EX. LINDBLAD 22-20AWB Offset Wellpath: EX. LINDBLAD 22-20AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

WELLPATH COMPOSITION - Offset Wellbore: EX. LINDBLAD 22-20AWB Offset Wellpath: EX. LINDBLAD 22-20AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
0.00	7780.00	Drift Indicator - Inclination Only (Actual Survey)	ASSUMED VERTICAL TO TD FROM COGCC <7780>	EX. LINDBLAD 22-20AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: EX. LINDBLAD 22-20AWB Offset Wellpath: EX. LINDBLAD 22-20AWP

MD Reference: Rig on SLOT#02 LINDBLAD 22-20 (1915'FNL & 2267'FWL, PR, CODL) (RT)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	4743.00ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 38 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DONN 5N-20B-L PWB Offset Wellpath: DONN 5N-20B-L PWP (REV-B.0)

Facility: SEC.21-T06N-R66W Slot: SLOT#21 DONN 5N-20B-L (898'FNL & 251'FEL, SEC.21) Well: DONN 5N-20B-L Threshold Value=1.00 † = Interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	26.00	25.00	40.07	0.28	0.40	40.08	1.57	65.01	PASS	
125.00†	125.00	0.00	0.00	126.00	125.00	40.07	0.28	0.40	40.08	1.89	42.18	PASS	
225.00†	225.00	0.00	0.00	226.00	225.00	40.07	0.28	0.40	40.08	2.46	26.09	PASS	
300.00	300.00	0.00	0.00	301.01	300.01	40.07	0.28	0.40	40.08	2.91	20.10	PASS	
325.00†	325.00	-0.09	0.06	326.25	325.25	39.99	0.37	-143.36	40.08	3.06	18.65	PASS	
425.00†	424.96	-2.20	1.61	427.19	426.15	38.16	2.35	-142.76	40.39	4.00	13.00	PASS	
525.00†	524.77	-7.13	5.22	528.13	526.89	33.92	6.96	-141.43	41.14	5.37	9.13	PASS	
625.00†	624.30	-14.86	10.88	629.04	627.32	27.29	14.16	-139.46	42.38	6.42	7.59	PASS	
725.00†	723.44	-25.39	18.59	729.93	727.32	18.26	23.96	-136.97	44.15	7.33	6.79	PASS	
825.00†	822.07	-38.71	28.34	830.43	826.45	7.08	36.10	-134.40	46.65	8.12	6.39	PASS	
895.18	890.91	-49.71	36.39	900.54	895.53	-1.02	44.90	-134.07	49.64	8.68	6.31	PASS	
925.00†	920.09	-54.67	40.02	930.32	924.88	-4.46	48.63	-134.25	51.17	8.91	6.32	PASS	
1025.00†	1017.94	-71.32	52.20	1030.19	1023.28	-16.01	61.16	-134.78	56.29	9.65	6.37	PASS	
1125.00†	1115.79	-87.96	64.39	1130.06	1121.69	-27.55	73.69	-135.23	61.41	10.35	6.44	PASS	
1225.00†	1213.64	-104.60	76.57	1229.92	1220.09	-39.09	86.22	-135.61	66.53	11.22	6.39	PASS	
1325.00†	1311.48	-121.25	88.76	1329.79	1318.49	-50.63	98.76	-135.93	71.66	12.04	6.38	PASS	
1425.00†	1409.33	-137.89	100.94	1429.66	1416.90	-62.17	111.29	-136.21	76.79	12.87	6.37	PASS	
1525.00†	1507.18	-154.53	113.12	1529.53	1515.30	-73.72	123.82	-136.46	81.93	13.71	6.35	PASS	
1625.00†	1605.03	-171.18	125.31	1629.39	1613.71	-85.26	136.35	-136.67	87.06	14.55	6.34	PASS	
1725.00†	1702.88	-187.82	137.49	1729.26	1712.11	-96.80	148.88	-136.86	92.19	15.40	6.32	PASS	
1825.00†	1800.73	-204.47	149.67	1829.13	1810.51	-108.34	161.41	-137.04	97.33	15.60	6.49	PASS	
1925.00†	1898.58	-221.11	161.86	1929.00	1908.92	-119.88	173.94	-137.19	102.47	15.75	6.77	PASS	
2025.00†	1996.43	-237.75	174.04	2028.87	2007.32	-131.43	186.47	-137.33	107.60	15.98	7.00	PASS	
2125.00†	2094.28	-254.40	186.22	2128.73	2105.72	-142.97	199.00	-137.46	112.74	16.29	7.19	PASS	
2225.00†	2192.13	-271.04	198.41	2228.60	2204.13	-154.51	211.53	-137.57	117.88	16.67	7.34	PASS	
2325.00†	2289.98	-287.68	210.59	2328.47	2302.53	-166.05	224.06	-137.68	123.02	17.13	7.45	PASS	
2425.00†	2387.83	-304.33	222.77	2428.34	2400.94	-177.60	236.59	-137.78	128.16	17.65	7.52	PASS	
2525.00†	2485.68	-320.97	234.96	2528.20	2499.34	-189.14	249.12	-137.87	133.30	18.24	7.56	PASS	
2625.00†	2583.53	-337.62	247.14	2628.07	2597.74	-200.68	261.66	-137.95	138.44	18.87	7.58	PASS	
2725.00†	2681.38	-354.26	259.33	2727.94	2696.15	-212.22	274.19	-138.03	143.58	19.56	7.58	PASS	
2825.00†	2779.23	-370.90	271.51	2827.81	2794.55	-223.76	286.72	-138.10	148.72	20.28	7.56	PASS	
2925.00†	2877.08	-387.55	283.69	2927.67	2892.95	-235.31	299.25	-138.17	153.86	21.05	7.53	PASS	
3025.00†	2974.93	-404.19	295.88	3027.54	2991.36	-246.85	311.78	-138.23	159.00	21.85	7.49	PASS	
3125.00†	3072.78	-420.83	308.06	3127.41	3089.76	-258.39	324.31	-138.29	164.14	22.68	7.44	PASS	
3225.00†	3170.63	-437.48	320.24	3227.28	3188.17	-269.93	336.84	-138.35	169.28	23.53	7.39	PASS	
3325.00†	3268.48	-454.12	332.43	3327.14	3286.57	-281.47	349.37	-138.40	174.42	24.41	7.33	PASS	
3425.00†	3366.33	-470.77	344.61	3427.01	3384.97	-293.02	361.90	-138.45	179.56	25.32	7.27	PASS	
3525.00†	3464.18	-487.41	356.79	3526.88	3483.38	-304.56	374.43	-138.48	184.70	26.24	7.21	PASS	
3625.00†	3562.03	-504.05	368.98	3626.75	3581.78	-316.10	386.96	-138.54	189.84	27.18	7.15	PASS	
3725.00†	3659.88	-520.70	381.16	3726.62	3680.19	-327.64	399.49	-138.58	194.98	28.13	7.08	PASS	
3825.00†	3757.73	-537.34	393.34	3826.48	3778.59	-339.18	412.02	-138.62	200.13	29.10	7.02	PASS	
3925.00†	3855.57	-553.98	405.53	3926.35	3876.99	-350.73	424.56	-138.66	205.27	30.08	6.96	PASS	
4025.00†	3953.42	-570.63	417.71	4026.22	3975.40	-362.27	437.09	-138.69	210.41	31.08	6.91	PASS	
4125.00†	4051.27	-587.27	429.90	4126.09	4073.80	-373.81	449.62	-138.73	215.55	32.08	6.85	PASS	
4225.00†	4149.12	-603.92	442.08	4225.95	4172.20	-385.35	462.15	-138.76	220.69	33.09	6.79	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 39 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DONN 5N-20B-L PWB Offset Wellpath: DONN 5N-20B-L PWP (REV-B.0)

Facility: SEC.21-T06N-R66W Slot: SLO#21 DONN 5N-20B-L (898'FNL & 251'FEL, SEC.21) Well: DONN 5N-20B-L Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
4325.00†	4246.97	-620.56	454.26	4325.82	4270.61	-396.89	474.68	-138.79	225.83	34.12	6.74	PASS	
4425.00†	4344.82	-637.20	466.45	4425.69	4369.01	-408.44	487.21	-138.82	230.98	35.15	6.69	PASS	
4525.00†	4442.67	-653.85	478.63	4525.56	4467.42	-419.98	499.74	-138.85	236.12	36.18	6.64	PASS	
4625.00†	4540.52	-670.49	490.81	4625.42	4565.82	-431.52	512.27	-138.88	241.26	37.23	6.59	PASS	
4725.00†	4638.37	-687.13	503.00	4725.29	4664.22	-443.06	524.80	-138.90	246.40	38.27	6.54	PASS	
4825.00†	4736.22	-703.78	515.18	4825.16	4762.63	-454.61	537.33	-138.93	251.55	39.33	6.49	PASS	
4925.00†	4834.07	-720.42	527.36	4925.03	4861.03	-466.15	549.86	-138.95	256.69	40.39	6.45	PASS	
5025.00†	4931.92	-737.07	539.55	5024.89	4959.43	-477.69	562.39	-138.97	261.83	41.45	6.41	PASS	
5125.00†	5029.77	-753.71	551.73	5124.76	5057.84	-489.23	574.92	-139.00	266.97	42.52	6.37	PASS	
5225.00†	5127.62	-770.35	563.91	5224.63	5156.24	-500.77	587.46	-139.02	272.12	43.59	6.33	PASS	
5325.00†	5225.47	-787.00	576.10	5324.50	5254.65	-512.32	599.99	-139.04	277.26	44.67	6.29	PASS	
5425.00†	5323.32	-803.64	588.28	5424.37	5353.05	-523.86	612.52	-139.06	282.40	45.75	6.25	PASS	
5525.00†	5421.17	-820.28	600.47	5524.23	5451.45	-535.40	625.05	-139.07	287.54	46.83	6.22	PASS	
5625.00†	5519.02	-836.93	612.65	5624.10	5549.86	-546.94	637.58	-139.09	292.69	47.92	6.18	PASS	
5725.00†	5616.87	-853.57	624.83	5723.97	5648.26	-558.48	650.11	-139.11	297.83	49.01	6.15	PASS	
5825.00†	5714.72	-870.22	637.02	5823.84	5746.66	-570.03	662.64	-139.13	302.97	50.10	6.12	PASS	
5925.00†	5812.57	-886.86	649.20	5923.70	5845.07	-581.57	675.17	-139.15	308.11	51.19	6.09	PASS	
6025.00†	5910.42	-903.50	661.38	6023.57	5943.47	-593.11	687.70	-139.16	313.26	52.29	6.06	PASS	
6125.00†	6008.27	-920.15	673.57	6123.44	6041.88	-604.65	700.23	-139.18	318.40	53.39	6.03	PASS	
6225.00†	6106.12	-936.79	685.75	6223.31	6140.28	-616.19	712.76	-139.19	323.54	54.49	6.00	PASS	
6325.00†	6203.97	-953.43	697.93	6323.17	6238.68	-627.74	725.29	-139.21	328.68	55.59	5.98	PASS	
6425.00†	6301.82	-970.08	710.12	6424.29	6338.36	-639.44	737.60	-139.29	333.79	56.70	5.95	PASS	
6525.00†	6399.66	-986.72	722.30	6528.57	6441.77	-651.86	738.54	-141.35	337.88	57.73	5.91	PASS	
6605.93	6478.85	-1000.19	732.16	6608.58	6520.40	-661.60	727.73	-144.80	341.16	58.57	5.88	PASS	
6625.00†	6497.54	-1003.38	734.20	6626.69	6537.96	-663.80	723.91	-153.13	342.13	58.83	5.87	PASS	
6725.00†	6595.97	-1020.39	735.57	6719.19	6625.55	-675.01	696.64	152.92	348.82	59.89	5.88	PASS	
6825.00†	6693.34	-1037.59	721.30	6808.04	6705.11	-685.52	658.68	117.39	357.79	61.10	5.91	PASS	
6925.00†	6787.24	-1054.57	691.74	6893.87	6776.24	-695.23	611.74	100.11	368.30	62.29	5.97	PASS	
7025.00†	6875.37	-1070.91	647.62	6977.22	6838.68	-704.07	557.34	89.94	379.56	62.59	6.12	PASS	
7125.00†	6955.55	-1086.20	590.03	7058.54	6892.27	-712.00	496.77	83.05	390.80	64.57	6.11	PASS	
7225.00†	7025.81	-1100.06	520.38	7138.23	6936.92	-718.98	431.19	78.08	401.35	65.79	6.16	PASS	
7325.00†	7084.42	-1112.16	440.40	7216.64	6972.55	-724.96	361.66	74.44	410.66	68.09	6.08	PASS	
7425.00†	7129.94	-1122.20	352.04	7294.06	6999.14	-729.93	289.16	71.82	418.25	70.66	5.97	PASS	
7525.00†	7161.25	-1129.93	257.49	7370.79	7016.67	-733.86	214.62	70.08	423.81	73.91	5.78	PASS	
7625.00†	7177.57	-1135.16	159.08	7447.05	7025.15	-736.73	138.94	69.11	427.07	77.69	5.54	PASS	
7682.94	7180.00	-1136.99	101.24	7493.21	7025.94	-737.95	92.80	68.89	427.83	80.11	5.38	PASS	
7725.00†	7179.88	-1138.00	59.19	7535.27	7025.67	-738.94	50.75	68.88	427.90	82.18	5.24	PASS	
7825.00†	7179.59	-1140.39	-40.78	7635.27	7025.03	-741.30	-49.22	68.83	428.05	87.48	4.93	PASS	
7925.00†	7179.29	-1142.78	-140.75	7735.27	7024.39	-743.66	-149.18	68.79	428.20	93.28	4.62	PASS	
8025.00†	7179.00	-1145.17	-240.72	7835.27	7023.75	-746.02	-249.15	68.75	428.36	99.50	4.33	PASS	
8125.00†	7178.71	-1147.56	-340.69	7935.27	7023.11	-748.39	-349.12	68.71	428.51	106.05	4.06	PASS	
8225.00†	7178.42	-1149.95	-440.66	8035.27	7022.47	-750.75	-449.09	68.67	428.67	112.89	3.81	PASS	
8325.00†	7178.13	-1152.34	-540.63	8135.27	7021.83	-753.11	-549.06	68.62	428.82	119.95	3.59	PASS	
8425.00†	7177.84	-1154.73	-640.61	8235.27	7021.19	-755.47	-649.03	68.58	428.98	127.21	3.39	PASS	
8525.00†	7177.55	-1157.12	-740.58	8335.27	7020.55	-757.83	-749.00	68.54	429.13	134.62	3.20	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 40 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DONN 5N-20B-L PWB Offset Wellpath: DONN 5N-20B-L PWP (REV-B.0)

Facility: SEC.21-T06N-R66W Slot: SLO#21 DONN 5N-20B-L (898'FNL & 251'FEL, SEC.21) Well: DONN 5N-20B-L Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
8625.00†	7177.25	-1159.52	-840.55	8435.27	7019.91	-760.19	-848.97	68.50	429.29	142.17	3.03	PASS	
8725.00†	7176.96	-1161.91	-940.52	8535.27	7019.27	-762.55	-948.94	68.46	429.44	149.83	2.88	PASS	
8825.00†	7176.67	-1164.30	-1040.49	8635.27	7018.63	-764.91	-1048.91	68.41	429.60	157.58	2.73	PASS	
8925.00†	7176.38	-1166.69	-1140.46	8735.27	7017.99	-767.28	-1148.88	68.37	429.76	165.42	2.60	PASS	
9025.00†	7176.09	-1169.08	-1240.43	8835.26	7017.35	-769.64	-1248.85	68.33	429.91	173.32	2.49	PASS	
9125.00†	7175.80	-1171.47	-1340.40	8935.26	7016.71	-772.00	-1348.82	68.29	430.07	181.28	2.38	PASS	
9225.00†	7175.51	-1173.86	-1440.37	9035.26	7016.07	-774.36	-1448.79	68.25	430.23	189.29	2.28	PASS	
9325.00†	7175.21	-1176.25	-1540.34	9135.26	7015.43	-776.72	-1548.76	68.21	430.38	197.35	2.19	PASS	
9425.00†	7174.92	-1178.64	-1640.32	9235.26	7014.79	-779.08	-1648.73	68.16	430.54	205.45	2.10	PASS	
9525.00†	7174.63	-1181.03	-1740.29	9335.26	7014.15	-781.44	-1748.70	68.12	430.70	213.58	2.02	PASS	
9625.00†	7174.34	-1183.42	-1840.26	9435.26	7013.50	-783.80	-1848.67	68.08	430.85	221.74	1.95	PASS	
9725.00†	7174.05	-1185.82	-1940.23	9535.26	7012.86	-786.16	-1948.64	68.04	431.01	229.92	1.88	PASS	
9825.00†	7173.76	-1188.21	-2040.20	9635.26	7012.22	-788.53	-2048.60	68.00	431.17	238.13	1.81	PASS	
9925.00†	7173.47	-1190.60	-2140.17	9735.26	7011.58	-790.89	-2148.57	67.96	431.33	246.36	1.75	PASS	
10025.00†	7173.17	-1192.99	-2240.14	9835.26	7010.94	-793.25	-2248.54	67.92	431.49	254.60	1.70	PASS	
10125.00†	7172.88	-1195.38	-2340.11	9935.26	7010.30	-795.61	-2348.51	67.87	431.65	262.86	1.64	PASS	
10225.00†	7172.59	-1197.77	-2440.08	10035.26	7009.66	-797.97	-2448.48	67.83	431.81	271.13	1.59	PASS	
10325.00†	7172.30	-1200.16	-2540.05	10135.26	7009.02	-800.33	-2548.45	67.79	431.97	279.42	1.55	PASS	
10425.00†	7172.01	-1202.55	-2640.03	10235.26	7008.38	-802.69	-2648.42	67.75	432.12	287.71	1.50	PASS	
10525.00†	7171.72	-1204.94	-2740.00	10335.26	7007.74	-805.05	-2748.39	67.71	432.28	296.01	1.46	PASS	
10625.00†	7171.42	-1207.33	-2839.97	10435.25	7007.10	-807.41	-2848.36	67.67	432.44	304.32	1.42	PASS	
10725.00†	7171.13	-1209.72	-2939.94	10535.25	7006.46	-809.78	-2948.33	67.63	432.60	312.64	1.38	PASS	
10825.00†	7170.84	-1212.11	-3039.91	10635.25	7005.82	-812.14	-3048.30	67.58	432.76	320.97	1.35	PASS	
10925.00†	7170.55	-1214.51	-3139.88	10735.25	7005.18	-814.50	-3148.27	67.54	432.93	329.30	1.32	PASS	
11025.00†	7170.26	-1216.90	-3239.85	10835.25	7004.54	-816.86	-3248.24	67.50	433.09	337.63	1.28	PASS	
11125.00†	7169.97	-1219.29	-3339.82	10935.25	7003.90	-819.22	-3348.21	67.46	433.25	345.97	1.25	PASS	
11225.00†	7169.68	-1221.68	-3439.79	11026.44	7003.31	-820.91	-3439.38	67.45	433.92	353.93	1.23	PASS	
11325.00†	7169.38	-1224.07	-3539.76	11108.95	7002.78	-819.27	-3521.86	67.59	438.11	361.44	1.21	PASS	
11425.00†	7169.09	-1226.46	-3639.74	11190.98	7002.25	-814.10	-3603.72	67.91	446.29	368.81	1.21	PASS	
11525.00†	7168.80	-1228.85	-3739.71	11272.26	7001.73	-805.52	-3684.53	68.37	458.44	375.94	1.22	PASS	
11625.00†	7168.51	-1231.24	-3839.68	11352.49	7001.21	-793.68	-3763.89	68.96	474.55	382.71	1.24	PASS	
11725.00†	7168.22	-1233.63	-3939.65	11431.89	7000.70	-778.70	-3841.85	69.65	494.56	389.13	1.27	PASS	
11825.00†	7167.93	-1236.02	-4039.62	11529.18	7000.08	-758.47	-3937.01	70.50	516.49	399.44	1.29	PASS	
11925.00†	7167.64	-1238.41	-4139.59	11626.47	6999.46	-738.24	-4032.17	71.29	538.51	409.61	1.32	PASS	
12025.00†	7167.34	-1240.81	-4239.56	11760.16	6998.59	-714.83	-4163.76	72.12	557.55	426.30	1.31	PASS	
12125.00†	7167.05	-1243.20	-4339.53	11898.22	6997.69	-700.38	-4301.03	72.63	569.92	441.02	1.29	PASS	
12225.00†	7166.76	-1245.59	-4439.50	12038.15	6996.77	-695.89	-4440.85	72.81	575.39	453.15	1.27	PASS	
12325.00†	7166.47	-1247.98	-4539.47	12178.48	6995.84	-701.67	-4581.03	72.69	573.84	462.40	1.24	PASS	
12425.00†	7166.18	-1250.37	-4639.45	12317.71	6994.93	-717.56	-4719.32	72.26	565.32	468.57	1.21	PASS	
12525.00†	7165.89	-1252.76	-4739.42	12454.39	6994.04	-742.92	-4853.59	71.49	550.00	471.52	1.17	PASS	
12625.00†	7165.60	-1255.15	-4839.39	12580.88	6993.22	-774.81	-4975.97	70.42	528.29	472.60	1.12	PASS	
12725.00†	7165.30	-1257.54	-4939.36	12674.70	6992.62	-800.64	-5066.17	69.45	504.64	478.72	1.05	PASS	
12825.00†	7165.01	-1259.93	-5039.33	12753.10	6992.12	-820.22	-5142.07	68.67	483.52	487.93	0.99	FAIL	
12925.00†	7164.72	-1262.32	-5139.30	12832.88	6991.60	-836.94	-5220.08	67.96	466.31	496.63	0.94	FAIL	
13025.00†	7164.43	-1264.71	-5239.27	12913.80	6991.08	-850.55	-5299.84	67.37	453.04	504.92	0.90	FAIL	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 41 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DONN 5N-20B-L PWB Offset Wellpath: DONN 5N-20B-L PWP (REV-B.0)

Facility: SEC.21-T06N-R66W Slot: SLOT#21 DONN 5N-20B-L (898'FNL & 251'FEL, SEC.21) Well: DONN 5N-20B-L Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
13125.00†	7164.14	-1267.10	-5339.24	12995.58	6990.56	-860.87	-5380.96	66.92	443.73	512.92	0.86	FAIL	
13225.00†	7163.85	-1269.50	-5439.21	13077.93	6990.03	-867.73	-5463.01	66.63	438.40	520.72	0.84	FAIL	
13325.00†	7163.56	-1271.89	-5539.18	13162.55	6989.50	-871.13	-5547.55	66.53	437.00	528.46	0.83	FAIL	
13425.00†	7163.26	-1274.28	-5639.16	13262.55	6988.86	-873.49	-5647.52	66.49	437.16	536.78	0.81	FAIL	
13525.00†	7162.97	-1276.67	-5739.13	13362.55	6988.23	-875.86	-5747.49	66.45	437.33	545.10	0.80	FAIL	
13625.00†	7162.68	-1279.06	-5839.10	13462.55	6987.60	-878.22	-5847.46	66.41	437.49	553.41	0.79	FAIL	
13725.00†	7162.39	-1281.45	-5939.07	13562.55	6986.96	-880.58	-5947.43	66.37	437.65	561.73	0.78	FAIL	
13825.00†	7162.10	-1283.84	-6039.04	13662.55	6986.33	-882.95	-6047.40	66.33	437.81	570.04	0.77	FAIL	
13925.00†	7161.81	-1286.23	-6139.01	13762.55	6985.70	-885.31	-6147.37	66.29	437.98	578.35	0.76	FAIL	
14025.00†	7161.51	-1288.62	-6238.98	13862.55	6985.06	-887.67	-6247.34	66.25	438.14	586.65	0.75	FAIL	
14032.94	7161.49	-1288.81	-6246.92	13870.49	6985.01	-887.86	-6255.28	66.25	438.15	587.31	0.75	FAIL	
14125.00†	7161.22	-1288.79	-6338.97	13962.51	6984.43	-890.03	-6347.27	66.08	436.28	594.47	0.73	FAIL	
14211.94	7160.97	-1284.71	-6425.81	14049.23	6983.88	-892.08	-6433.96	65.65	430.79	600.25	0.72	FAIL	
14225.00†	7160.93	-1283.79	-6438.83	14062.23	6983.80	-892.39	-6446.96	65.58	429.70	601.04	0.71	FAIL	
14325.00†	7160.64	-1276.82	-6538.59	14161.79	6983.17	-894.74	-6546.50	65.01	421.36	606.96	0.69	FAIL	
14411.94	7160.39	-1270.75	-6625.32	14248.35	6982.62	-896.79	-6633.03	64.50	414.14	611.91	0.68	FAIL	
14425.00†	7160.35	-1269.89	-6638.35	14261.36	6982.54	-897.09	-6646.03	64.44	413.10	612.66	0.67	FAIL	
14525.00†	7160.06	-1266.21	-6738.27	14361.16	6981.91	-899.45	-6745.81	64.09	407.81	619.09	0.66	FAIL	
14625.00†	7159.76	-1267.77	-6838.25	14461.15	6981.27	-901.81	-6845.76	64.00	407.23	626.99	0.65	FAIL	
14725.00†	7159.47	-1274.55	-6938.00	14561.04	6980.64	-904.17	-6945.62	64.16	411.36	636.41	0.65	FAIL	
14825.00†	7159.17	-1286.55	-7037.27	14660.56	6980.01	-906.53	-7045.12	64.57	420.21	647.27	0.65	FAIL	
14925.00†	7158.88	-1303.73	-7135.77	14759.44	6979.38	-908.86	-7143.97	65.19	433.83	659.31	0.66	FAIL	
14937.60	7158.84	-1306.26	-7148.12	14771.84	6979.31	-909.15	-7156.37	65.28	435.88	660.90	0.66	FAIL	
15025.00†	7158.59	-1324.09	-7233.68	14857.80	6978.76	-911.19	-7242.30	66.08	450.44	671.79	0.67	FAIL	
15037.60	7158.55	-1326.66	-7246.02	14870.20	6978.68	-911.48	-7254.69	66.19	452.55	673.34	0.67	FAIL	
15125.00†	7158.30	-1342.52	-7331.95	14956.48	6978.14	-913.52	-7340.95	67.01	465.38	683.55	0.68	FAIL	
15225.00†	7158.01	-1355.83	-7431.05	15055.87	6977.51	-915.87	-7440.30	67.61	475.64	694.14	0.68	FAIL	
15325.00†	7157.72	-1363.93	-7530.71	15155.69	6976.87	-918.22	-7540.10	67.90	481.09	703.67	0.68	FAIL	
15417.62	7157.45	-1366.77	-7623.28	15248.30	6976.29	-920.41	-7632.68	67.91	481.81	711.59	0.68	FAIL	
15425.00†	7157.43	-1366.82	-7630.66	15255.68	6976.24	-920.59	-7640.05	67.91	481.71	712.19	0.68	FAIL	
15525.00†	7157.14	-1367.46	-7730.65	15355.66	6975.61	-922.95	-7740.01	67.79	480.24	720.23	0.67	FAIL	
15625.00†	7156.85	-1368.11	-7830.65	15455.65	6974.97	-925.31	-7839.96	67.68	478.79	728.26	0.66	FAIL	
15725.00†	7156.56	-1368.75	-7930.65	15555.63	6974.34	-927.67	-7939.92	67.56	477.33	736.27	0.65	FAIL	
15825.00†	7156.27	-1369.40	-8030.65	15655.62	6973.71	-930.04	-8039.87	67.44	475.87	744.25	0.64	FAIL	
15925.00†	7155.98	-1370.04	-8130.64	15755.60	6973.08	-932.40	-8139.83	67.32	474.42	752.23	0.63	FAIL	
16025.00†	7155.70	-1370.69	-8230.64	15855.58	6972.44	-934.76	-8239.78	67.20	472.97	760.18	0.62	FAIL	
16125.00†	7155.41	-1371.33	-8330.64	15955.57	6971.81	-937.12	-8339.74	67.08	471.52	768.10	0.61	FAIL	
16225.00†	7155.12	-1371.98	-8430.64	16055.55	6971.18	-939.49	-8439.69	66.96	470.07	776.02	0.61	FAIL	
16325.00†	7154.83	-1372.62	-8530.63	16155.54	6970.54	-941.85	-8539.65	66.84	468.63	783.91	0.60	FAIL	
16425.00†	7154.54	-1373.27	-8630.63	16255.52	6969.91	-944.21	-8639.60	66.72	467.18	791.78	0.59	FAIL	
16525.00†	7154.25	-1373.91	-8730.63	16355.51	6969.28	-946.57	-8739.56	66.60	465.74	799.63	0.58	FAIL	
16625.00†	7153.97	-1374.56	-8830.63	16455.49	6968.64	-948.94	-8839.51	66.47	464.30	807.46	0.57	FAIL	
16725.00†	7153.68	-1375.20	-8930.62	16555.48	6968.01	-951.30	-8939.47	66.35	462.87	815.27	0.57	FAIL	
16825.00†	7153.39	-1375.85	-9030.62	16655.46	6967.38	-953.66	-9039.42	66.23	461.43	823.05	0.56	FAIL	
16925.00†	7153.10	-1376.49	-9130.62	16755.45	6966.74	-956.02	-9139.37	66.10	460.00	830.81	0.55	FAIL	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 42 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DONN 5N-20B-L PWB Offset Wellpath: DONN 5N-20B-L PWP (REV-B.0)

Facility: SEC.21-T06N-R66W Slot: SLOT#21 DONN 5N-20B-L (898'FNL & 251'FEL, SEC.21) Well: DONN 5N-20B-L Threshold Value=1.00 † = Interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
17025.00†	7152.81	-1377.14	-9230.62	16855.43	6966.11	-958.38	-9239.33	65.97	458.57	838.55	0.55	FAIL	
17125.00†	7152.52	-1377.78	-9330.61	16955.42	6965.48	-960.75	-9339.28	65.85	457.14	846.27	0.54	FAIL	
17225.00†	7152.24	-1378.43	-9430.61	17055.40	6964.84	-963.11	-9439.24	65.72	455.72	853.96	0.53	FAIL	
17325.00†	7151.95	-1379.07	-9530.61	17155.38	6964.21	-965.47	-9539.19	65.59	454.30	861.63	0.53	FAIL	
17425.00†	7151.66	-1379.72	-9630.61	17255.37	6963.58	-967.83	-9639.15	65.46	452.87	869.28	0.52	FAIL	
17525.00†	7151.37	-1380.36	-9730.60	17355.35	6962.94	-970.20	-9739.10	65.33	451.46	876.90	0.51	FAIL	
17625.00†	7151.08	-1381.01	-9830.60	17455.34	6962.31	-972.56	-9839.06	65.20	450.04	884.49	0.51	FAIL	
17725.00†	7150.79	-1381.65	-9930.60	17555.32	6961.68	-974.92	-9939.01	65.07	448.63	892.06	0.50	FAIL	
17825.00†	7150.51	-1382.30	-10030.60	17655.31	6961.04	-977.28	-10038.97	64.94	447.22	899.61	0.50	FAIL	
17925.00†	7150.22	-1382.94	-10130.59	17755.29	6960.41	-979.65	-10138.92	64.80	445.81	907.12	0.49	FAIL	
17996.95†	7150.01	-1383.41	-10202.54	17820.26	6960.00	-981.18	-10203.87	64.71	444.85	912.13	0.49	FAIL	
18000.13	7150.00	-1383.43	-10205.72	17820.26	6960.00	-981.18	-10203.87	64.71	444.86	911.41	0.49	FAIL	

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: DONN 5N-20B-L PWB Offset Wellpath: DONN 5N-20B-L PWP (REV-B.0)

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: DONN 5N-20B-L PWB Offset Wellpath: DONN 5N-20B-L PWP (REV-B.0)

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
13.5in Open Hole	25.00	1750.00	1725.00	24.00	1732.54	24.43	0.17	-18.02	46.26
9.625in Casing Surface	25.00	1750.00	1725.00	24.00	1732.54	24.43	0.17	-18.02	46.26
8.5in Open Hole	1750.00	17820.26	16070.26	1732.54	6960.00	-18.02	46.26	-286.85	-3110.05

SURVEY PROGRAM - Offset Wellbore: DONN 5N-20B-L PWB Offset Wellpath: DONN 5N-20B-L PWP (REV-B.0)

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
25.00	1750.00	Custom BHI NaviTrak (Standard Rotating+Axial Corr) (Rockies 0.03Gt model)		DONN 5N-20B-L PWB
1750.00	17820.26	Custom BHI AutoTrak Curve (IFR1, Short) (Rockies 0.03Gt model)		DONN 5N-20B-L PWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: DONN 5N-20B-L PWB Offset Wellpath: DONN 5N-20B-L PWP (REV-B.0)

MD Reference: PRECISION DRILLING (25') (RKB)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	25.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 43 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. WARD ENGLISH 42-20 AWP Offset Wellpath: EX. WARD ENGLISH 42-20 AWP

Facility: SEC.20-T06N-R66W Slot: SLOT#02 EX. WARD ENGLISH 42-20 (1980'FNL & 660'FEL, PA, CODL) Well: EX. WARD ENGLISH 42-20 Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	6.26	23.26	-1144.02	-5713.34	-101.32	5826.75	50.17	118.40	PASS	
125.00†	125.00	0.00	0.00	84.51	101.51	-1143.91	-5713.53	-101.32	5826.97	50.17	118.39	PASS	
225.00†	225.00	0.00	0.00	164.86	181.86	-1143.57	-5714.07	-101.32	5827.54	50.18	118.38	PASS	
300.00	300.00	0.00	0.00	222.67	239.66	-1143.12	-5714.68	-101.31	5828.20	50.20	118.36	PASS	
325.00†	325.00	-0.09	0.06	240.63	257.62	-1142.91	-5714.92	114.89	5828.52	50.20	118.36	PASS	
425.00†	424.96	-2.20	1.61	316.13	333.09	-1141.62	-5716.25	114.88	5831.01	50.23	118.35	PASS	
525.00†	524.77	-7.13	5.22	408.42	425.33	-1139.36	-5718.24	114.88	5835.22	50.27	118.33	PASS	
625.00†	624.30	-14.86	10.88	492.89	509.75	-1137.18	-5720.24	114.87	5841.10	50.32	118.33	PASS	
725.00†	723.44	-25.39	18.59	604.98	621.79	-1134.77	-5722.84	114.89	5848.51	50.39	118.31	PASS	
825.00†	822.07	-38.71	28.34	706.58	723.34	-1132.73	-5725.01	114.91	5857.27	50.46	118.31	PASS	
895.18	890.91	-49.71	36.39	796.72	813.46	-1131.07	-5726.71	114.95	5864.18	50.53	118.29	PASS	
925.00†	920.09	-54.67	40.02	831.80	848.53	-1130.51	-5727.26	115.03	5867.21	50.55	118.29	PASS	
1025.00†	1017.94	-71.32	52.20	944.20	960.90	-1128.62	-5728.84	115.25	5877.22	50.64	118.28	PASS	
1125.00†	1115.79	-87.96	64.39	1049.35	1066.03	-1126.87	-5730.12	115.46	5887.12	50.74	118.25	PASS	
1225.00†	1213.64	-104.60	76.57	1152.94	1169.60	-1125.17	-5731.26	115.67	5896.99	50.84	118.21	PASS	
1325.00†	1311.48	-121.25	88.76	1256.45	1273.09	-1123.43	-5732.30	115.87	5906.82	50.95	118.14	PASS	
1425.00†	1409.33	-137.89	100.94	1360.19	1376.80	-1121.83	-5733.20	116.08	5916.62	51.07	118.05	PASS	
1525.00†	1507.18	-154.53	113.12	1459.63	1476.24	-1120.64	-5733.93	116.27	5926.41	51.20	117.95	PASS	
1625.00†	1605.03	-171.18	125.31	1560.66	1577.26	-1119.78	-5734.59	116.46	5936.25	51.34	117.81	PASS	
1725.00†	1702.88	-187.82	137.49	1654.37	1670.97	-1118.97	-5735.16	116.64	5946.10	51.49	117.66	PASS	
1825.00†	1800.73	-204.47	149.67	1748.76	1765.36	-1118.59	-5735.79	116.81	5956.14	51.36	117.57	PASS	
1925.00†	1898.58	-221.11	161.86	1847.28	1863.87	-1118.16	-5736.43	116.99	5966.22	51.48	117.50	PASS	
2025.00†	1996.43	-237.75	174.04	1946.13	1962.72	-1117.91	-5737.06	117.17	5976.36	51.61	117.39	PASS	
2125.00†	2094.28	-254.40	186.22	2042.82	2059.41	-1117.68	-5737.63	117.34	5986.52	51.77	117.24	PASS	
2225.00†	2192.13	-271.04	198.41	2132.83	2149.41	-1117.48	-5738.25	117.50	5996.84	51.93	117.06	PASS	
2325.00†	2289.98	-287.68	210.59	2227.40	2243.98	-1117.33	-5738.99	117.67	6007.33	52.12	116.83	PASS	
2425.00†	2387.83	-304.33	222.77	2321.06	2347.64	-1117.23	-5739.75	117.85	6017.82	52.34	116.53	PASS	
2525.00†	2485.68	-320.97	234.96	2436.30	2452.87	-1117.53	-5740.38	118.03	6028.28	52.58	116.20	PASS	
2625.00†	2583.53	-337.62	247.14	2535.97	2552.55	-1118.01	-5740.79	118.20	6038.65	52.82	115.86	PASS	
2725.00†	2681.38	-354.26	259.33	2621.02	2637.60	-1118.32	-5741.29	118.35	6049.22	53.07	115.52	PASS	
2825.00†	2779.23	-370.90	271.51	2710.50	2727.07	-1118.52	-5741.97	118.50	6059.99	53.34	115.13	PASS	
2925.00†	2877.08	-387.55	283.69	2790.29	2806.85	-1118.70	-5742.76	118.64	6071.04	53.62	114.73	PASS	
3025.00†	2974.93	-404.19	295.88	2885.70	2902.26	-1118.90	-5743.88	118.80	6082.33	53.93	114.26	PASS	
3125.00†	3072.78	-420.83	308.06	2980.23	2996.78	-1119.14	-5745.01	118.96	6093.69	54.27	113.77	PASS	
3225.00†	3170.63	-437.48	320.24	3065.95	3082.50	-1119.47	-5746.12	119.11	6105.21	54.60	113.28	PASS	
3325.00†	3268.48	-454.12	332.43	3151.14	3167.67	-1119.68	-5747.42	119.25	6117.00	54.94	112.77	PASS	
3425.00†	3366.33	-470.77	344.61	3235.16	3251.68	-1119.63	-5748.90	119.40	6129.04	55.30	112.25	PASS	
3525.00†	3464.18	-487.41	356.79	3312.11	3328.62	-1119.51	-5750.47	119.53	6141.38	55.66	111.75	PASS	
3625.00†	3562.03	-504.05	368.98	3372.70	3389.18	-1119.41	-5752.01	119.63	6154.27	56.00	111.29	PASS	
3725.00†	3659.88	-520.70	381.16	3434.35	3450.80	-1119.31	-5753.94	119.74	6167.78	56.35	110.83	PASS	
3825.00†	3757.73	-537.34	393.34	3496.86	3513.27	-1119.24	-5756.25	119.85	6181.90	56.72	110.36	PASS	
3925.00†	3855.57	-553.98	405.53	3583.76	3600.09	-1119.13	-5759.80	120.00	6196.44	57.15	109.78	PASS	
4025.00†	3953.42	-570.63	417.71	3681.06	3697.31	-1119.09	-5763.84	120.16	6211.12	57.61	109.14	PASS	
4125.00†	4051.27	-587.27	429.90	3764.81	3780.99	-1119.09	-5767.38	120.30	6225.92	58.05	108.56	PASS	
4225.00†	4149.12	-603.92	442.08	3849.75	3865.84	-1118.76	-5771.21	120.45	6241.01	58.51	107.96	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 44 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. WARD ENGLISH 42-20 AWP Offset Wellpath: EX. WARD ENGLISH 42-20 AWP

Facility: SEC.20-T06N-R66W Slot: SLOT#02 EX. WARD ENGLISH 42-20 (1980'FNL & 660'FEL, PA, CODL) Well: EX. WARD ENGLISH 42-20 Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
4325.00†	4246.97	-620.56	454.26	3948.33	3964.32	-1118.56	-5775.74	120.62	6256.27	59.01	107.29	PASS	
4425.00†	4344.82	-637.20	466.45	4091.52	4107.38	-1118.84	-5781.80	120.86	6271.28	59.64	106.41	PASS	
4525.00†	4442.67	-653.85	478.63	4216.74	4232.52	-1118.93	-5786.26	121.06	6285.65	60.23	105.58	PASS	
4625.00†	4540.52	-670.49	490.81	4348.36	4364.08	-1118.22	-5790.35	121.29	6299.58	60.86	104.72	PASS	
4725.00†	4638.37	-687.13	503.00	4465.00	4480.67	-1117.76	-5793.45	121.48	6313.13	61.45	103.92	PASS	
4825.00†	4736.22	-703.78	515.18	4581.39	4597.02	-1117.82	-5796.21	121.67	6326.48	62.07	103.10	PASS	
4925.00†	4834.07	-720.42	527.36	4686.02	4701.64	-1118.10	-5798.42	121.83	6339.65	62.66	102.32	PASS	
5025.00†	4931.92	-737.07	539.55	4804.83	4820.42	-1118.41	-5800.70	122.02	6352.69	63.30	101.48	PASS	
5125.00†	5029.77	-753.71	551.73	4917.92	4933.50	-1118.57	-5802.54	122.20	6365.47	63.94	100.66	PASS	
5225.00†	5127.62	-770.35	563.91	5027.87	5043.44	-1118.46	-5804.09	122.38	6378.07	64.58	99.85	PASS	
5325.00†	5225.47	-787.00	576.10	5132.99	5148.54	-1118.39	-5805.44	122.54	6390.60	65.21	99.06	PASS	
5425.00†	5323.32	-803.64	588.28	5254.90	5270.46	-1118.14	-5806.73	122.74	6402.96	65.90	98.21	PASS	
5525.00†	5421.17	-820.28	600.47	5364.57	5380.11	-1117.85	-5807.49	122.91	6414.99	66.56	97.41	PASS	
5625.00†	5519.02	-836.93	612.65	5455.43	5470.98	-1117.64	-5808.11	123.05	6427.07	67.18	96.68	PASS	
5725.00†	5616.87	-853.57	624.83	5547.23	5562.77	-1117.73	-5808.85	123.20	6439.33	67.80	95.96	PASS	
5825.00†	5714.72	-870.22	637.02	5670.47	5686.00	-1118.42	-5809.73	123.38	6451.58	68.51	95.15	PASS	
5925.00†	5812.57	-886.86	649.20	5781.01	5796.55	-1118.63	-5810.04	123.55	6463.42	69.19	94.37	PASS	
6025.00†	5910.42	-903.50	661.38	5880.56	5896.09	-1118.68	-5810.27	123.70	6475.25	69.87	93.62	PASS	
6125.00†	6008.27	-920.15	673.57	5980.22	5995.75	-1118.71	-5810.48	123.85	6487.09	70.55	92.87	PASS	
6225.00†	6106.12	-936.79	685.75	6054.06	6069.59	-1118.65	-5810.72	123.97	6499.12	71.16	92.24	PASS	
6325.00†	6203.97	-953.43	697.93	6132.85	6148.38	-1118.22	-5811.35	124.09	6511.60	71.78	91.61	PASS	
6425.00†	6301.82	-970.08	710.12	6227.53	6243.06	-1117.62	-5812.15	124.24	6524.20	72.45	90.93	PASS	
6525.00†	6399.66	-986.72	722.30	6305.50	6321.02	-1117.15	-5812.98	124.36	6537.05	73.08	90.32	PASS	
6605.93	6478.85	-1000.19	732.16	6365.60	6381.12	-1116.93	-5813.79	124.45	6547.72	73.59	89.83	PASS	
6625.00†	6497.54	-1003.38	734.20	6379.80	6395.31	-1116.91	-5814.01	117.18	6549.99	73.71	89.71	PASS	
6725.00†	6595.97	-1020.39	735.57	6505.03	6520.53	-1116.72	-5815.79	68.71	6552.50	74.64	88.62	PASS	
6825.00†	6693.34	-1037.59	721.30	6579.80	6595.29	-1116.42	-5816.78	38.23	6539.29	75.88	86.98	PASS	
6925.00†	6787.24	-1054.57	691.74	6671.14	6686.62	-1116.03	-5818.21	25.59	6511.02	77.22	85.09	PASS	
7025.00†	6875.37	-1070.91	647.62	6761.58	6777.04	-1115.53	-5819.60	19.57	6468.12	78.33	83.32	PASS	
7125.00†	6955.55	-1086.20	590.03	6838.15	6853.60	-1114.96	-5820.78	16.33	6411.68	79.20	81.67	PASS	
7225.00†	7025.81	-1100.06	520.38	6902.03	6917.48	-1114.42	-5821.84	14.54	6343.16	79.88	80.11	PASS	
7325.00†	7084.42	-1112.16	440.40	6964.27	6979.70	-1113.79	-5822.89	13.73	6264.16	80.40	78.60	PASS	
7425.00†	7129.94	-1122.20	352.04	7114.52	7129.94	-1112.71	-5824.31	14.35	6176.36	80.97	76.95	PASS	
7525.00†	7161.25	-1129.93	257.49	7145.83	7161.25	-1112.71	-5824.31	16.32	6081.83	81.25	75.50	PASS	
7625.00†	7177.57	-1135.16	159.08	7162.15	7177.57	-1112.71	-5824.31	26.53	5983.43	81.38	74.16	PASS	
7682.94	7180.00	-1136.99	101.24	7164.58	7180.00	-1112.71	-5824.31	95.94	5925.59	81.40	73.42	PASS	
7725.00†	7179.88	-1138.00	59.19	7164.46	7179.88	-1112.71	-5824.31	95.90	5883.55	81.40	72.90	PASS	
7825.00†	7179.59	-1140.39	-40.78	7164.17	7179.59	-1112.71	-5824.31	95.80	5783.59	81.41	71.66	PASS	
7925.00†	7179.29	-1142.78	-140.75	7163.88	7179.29	-1112.71	-5824.31	95.70	5683.64	81.42	70.41	PASS	
8025.00†	7179.00	-1145.17	-240.72	7163.58	7179.00	-1112.71	-5824.31	95.60	5583.68	81.42	69.17	PASS	
8125.00†	7178.71	-1147.56	-340.69	7163.29	7178.71	-1112.71	-5824.31	95.50	5483.72	81.44	67.92	PASS	
8225.00†	7178.42	-1149.95	-440.66	7163.00	7178.42	-1112.71	-5824.31	95.40	5383.77	81.45	66.67	PASS	
8325.00†	7178.13	-1152.34	-540.63	7162.71	7178.13	-1112.71	-5824.31	95.30	5283.82	81.46	65.42	PASS	
8425.00†	7177.84	-1154.73	-640.61	7162.42	7177.84	-1112.71	-5824.31	95.20	5183.87	81.48	64.17	PASS	
8525.00†	7177.55	-1157.12	-740.58	7162.13	7177.55	-1112.71	-5824.31	95.10	5083.92	81.50	62.92	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 45 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. WARD ENGLISH 42-20 AWB Offset Wellpath: EX. WARD ENGLISH 42-20 AWP

Facility: SEC.20-T06N-R66W				Slot: SLOT#02 EX. WARD ENGLISH 42-20 (1980'FNL & 660'FEL, PA, CODL)				Well: EX. WARD ENGLISH 42-20		Threshold Value=1.00		† = interpolated/extrapolated station	
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
8625.00†	7177.25	-1159.52	-840.55	7161.84	7177.25	-1112.71	-5824.31	95.00	4983.98	81.52	61.66	PASS	
8725.00†	7176.96	-1161.91	-940.52	7161.54	7176.96	-1112.71	-5824.31	94.90	4884.04	81.55	60.41	PASS	
8825.00†	7176.67	-1164.30	-1040.49	7161.25	7176.67	-1112.71	-5824.31	94.80	4784.10	81.58	59.15	PASS	
8925.00†	7176.38	-1166.69	-1140.46	7160.96	7176.38	-1112.71	-5824.31	94.70	4684.16	81.61	57.89	PASS	
9025.00†	7176.09	-1169.08	-1240.43	7160.67	7176.09	-1112.71	-5824.31	94.60	4584.22	81.64	56.63	PASS	
9125.00†	7175.80	-1171.47	-1340.40	7160.38	7175.80	-1112.71	-5824.31	94.50	4484.29	81.68	55.37	PASS	
9225.00†	7175.51	-1173.86	-1440.37	7160.09	7175.51	-1112.71	-5824.31	94.40	4384.36	81.72	54.11	PASS	
9325.00†	7175.21	-1176.25	-1540.34	7159.80	7175.21	-1112.71	-5824.31	94.30	4284.43	81.76	52.85	PASS	
9425.00†	7174.92	-1178.64	-1640.32	7159.50	7174.92	-1112.71	-5824.31	94.20	4184.51	81.81	51.59	PASS	
9525.00†	7174.63	-1181.03	-1740.29	7159.21	7174.63	-1112.71	-5824.31	94.10	4084.59	81.86	50.32	PASS	
9625.00†	7174.34	-1183.42	-1840.26	7158.92	7174.34	-1112.71	-5824.31	94.00	3984.68	81.92	49.06	PASS	
9725.00†	7174.05	-1185.82	-1940.23	7158.63	7174.05	-1112.71	-5824.31	93.90	3884.77	81.98	47.79	PASS	
9825.00†	7173.76	-1188.21	-2040.20	7158.34	7173.76	-1112.71	-5824.31	93.80	3784.86	82.05	46.52	PASS	
9925.00†	7173.47	-1190.60	-2140.17	7158.05	7173.47	-1112.71	-5824.31	93.70	3684.96	82.13	45.25	PASS	
10025.00†	7173.17	-1192.99	-2240.14	7157.76	7173.17	-1112.71	-5824.31	93.60	3585.06	82.21	43.98	PASS	
10125.00†	7172.88	-1195.38	-2340.11	7157.46	7172.88	-1112.71	-5824.31	93.50	3485.17	82.29	42.71	PASS	
10225.00†	7172.59	-1197.77	-2440.08	7157.17	7172.59	-1112.71	-5824.31	93.40	3385.29	82.39	41.44	PASS	
10325.00†	7172.30	-1200.16	-2540.05	7156.88	7172.30	-1112.71	-5824.31	93.30	3285.42	82.50	40.16	PASS	
10425.00†	7172.01	-1202.55	-2640.03	7156.59	7172.01	-1112.71	-5824.31	93.20	3185.55	82.61	38.88	PASS	
10525.00†	7171.72	-1204.94	-2740.00	7156.30	7171.72	-1112.71	-5824.31	93.10	3085.69	82.74	37.61	PASS	
10625.00†	7171.42	-1207.33	-2839.97	7156.01	7171.42	-1112.71	-5824.31	93.00	2985.84	82.88	36.33	PASS	
10725.00†	7171.13	-1209.72	-2939.94	7155.72	7171.13	-1112.71	-5824.31	92.90	2886.00	83.04	35.04	PASS	
10825.00†	7170.84	-1212.11	-3039.91	7155.42	7170.84	-1112.71	-5824.31	92.80	2786.17	83.22	33.76	PASS	
10925.00†	7170.55	-1214.51	-3139.88	7155.13	7170.55	-1112.71	-5824.31	92.70	2686.36	83.41	32.47	PASS	
11025.00†	7170.26	-1216.90	-3239.85	7154.84	7170.26	-1112.71	-5824.31	92.60	2586.55	83.62	31.19	PASS	
11125.00†	7169.97	-1219.29	-3339.82	7154.55	7169.97	-1112.71	-5824.31	92.50	2486.77	83.87	29.90	PASS	
11225.00†	7169.68	-1221.68	-3439.79	7154.26	7169.68	-1112.71	-5824.31	92.40	2387.00	84.14	28.60	PASS	
11325.00†	7169.38	-1224.07	-3539.76	7153.97	7169.38	-1112.71	-5824.31	92.29	2287.25	84.45	27.30	PASS	
11425.00†	7169.09	-1226.46	-3639.74	7153.67	7169.09	-1112.71	-5824.31	92.19	2187.53	84.80	26.00	PASS	
11525.00†	7168.80	-1228.85	-3739.71	7153.38	7168.80	-1112.71	-5824.31	92.09	2087.83	85.21	24.70	PASS	
11625.00†	7168.51	-1231.24	-3839.68	7153.09	7168.51	-1112.71	-5824.31	91.99	1988.17	85.67	23.39	PASS	
11725.00†	7168.22	-1233.63	-3939.65	7152.80	7168.22	-1112.71	-5824.31	91.89	1888.53	86.21	22.08	PASS	
11825.00†	7167.93	-1236.02	-4039.62	7152.51	7167.93	-1112.71	-5824.31	91.79	1788.94	86.84	20.76	PASS	
11925.00†	7167.64	-1238.41	-4139.59	7152.22	7167.64	-1112.71	-5824.31	91.69	1689.40	87.57	19.44	PASS	
12025.00†	7167.34	-1240.81	-4239.56	7151.93	7167.34	-1112.71	-5824.31	91.59	1589.91	88.45	18.11	PASS	
12125.00†	7167.05	-1243.20	-4339.53	7151.63	7167.05	-1112.71	-5824.31	91.49	1490.50	89.49	16.78	PASS	
12225.00†	7166.76	-1245.59	-4439.50	7151.34	7166.76	-1112.71	-5824.31	91.39	1391.16	90.75	15.44	PASS	
12325.00†	7166.47	-1247.98	-4539.47	7151.05	7166.47	-1112.71	-5824.31	91.29	1291.93	92.29	14.10	PASS	
12425.00†	7166.18	-1250.37	-4639.45	7150.76	7166.18	-1112.71	-5824.31	91.19	1192.83	94.19	12.75	PASS	
12525.00†	7165.89	-1252.76	-4739.42	7150.47	7165.89	-1112.71	-5824.31	91.09	1093.89	96.56	11.40	PASS	
12625.00†	7165.60	-1255.15	-4839.39	7150.18	7165.60	-1112.71	-5824.31	90.99	995.17	99.57	10.06	PASS	
12725.00†	7165.30	-1257.54	-4939.36	7149.89	7165.30	-1112.71	-5824.31	90.89	896.72	103.45	8.72	PASS	
12825.00†	7165.01	-1259.93	-5039.33	7149.59	7165.01	-1112.71	-5824.31	90.79	798.66	108.54	7.40	PASS	
12925.00†	7164.72	-1262.32	-5139.30	7149.30	7164.72	-1112.71	-5824.31	90.69	701.16	115.38	6.11	PASS	
13025.00†	7164.43	-1264.71	-5239.27	7149.01	7164.43	-1112.71	-5824.31	90.59	604.46	124.80	4.87	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 46 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: **EX. WARD ENGLISH 42-20 AWB** Offset Wellpath: **EX. WARD ENGLISH 42-20 AWP**

Facility: SEC.20-T06N-R66W Slot: SLOT#02 EX. WARD ENGLISH 42-20 (1980'FNL & 660'FEL, PA, CODL) Well: EX. WARD ENGLISH 42-20 Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
13125.00†	7164.14	-1267.10	-5339.24	7148.72	7164.14	-1112.71	-5824.31	90.48	509.04	138.21	3.70	PASS	
13225.00†	7163.85	-1269.50	-5439.21	7148.43	7163.85	-1112.71	-5824.31	90.38	415.79	158.05	2.64	PASS	
13325.00†	7163.56	-1271.89	-5539.18	7148.14	7163.56	-1112.71	-5824.31	90.28	326.55	188.60	1.73	PASS	
13425.00†	7163.26	-1274.28	-5639.16	7147.85	7163.26	-1112.71	-5824.31	90.18	245.74	236.55	1.04	PASS	
13525.00†	7162.97	-1276.67	-5739.13	7147.55	7162.97	-1112.71	-5824.31	90.08	184.77	301.54	0.61	FAIL	
13606.22†	7162.74	-1278.61	-5820.33	7147.39	7162.81	-1112.71	-5824.31	90.03	165.95	332.43	0.50	FAIL	
13607.39†	7162.73	-1278.64	-5821.50	7147.31	7162.73	-1112.71	-5824.31	90.00	165.95	332.45	0.50	FAIL	
13625.00†	7162.68	-1279.06	-5839.10	7147.26	7162.68	-1112.71	-5824.31	89.98	167.01	331.12	0.50	FAIL	
13725.00†	7162.39	-1281.45	-5939.07	7146.97	7162.39	-1112.71	-5824.31	89.88	204.07	282.39	0.72	FAIL	
13825.00†	7162.10	-1283.84	-6039.04	7146.68	7162.10	-1112.71	-5824.31	89.78	274.58	224.88	1.22	PASS	
13925.00†	7161.81	-1286.23	-6139.01	7146.39	7161.81	-1112.71	-5824.31	89.68	359.37	185.81	1.94	PASS	
14025.00†	7161.51	-1288.62	-6238.98	7146.10	7161.51	-1112.71	-5824.31	89.58	450.45	160.63	2.81	PASS	
14032.94	7161.49	-1288.81	-6246.92	7146.07	7161.49	-1112.71	-5824.31	89.57	457.84	159.05	2.89	PASS	
14125.00†	7161.22	-1288.79	-6338.97	7145.81	7161.22	-1112.71	-5824.31	89.55	543.95	142.90	3.82	PASS	
14211.94	7160.97	-1284.71	-6425.81	7145.55	7160.97	-1112.71	-5824.31	89.54	625.61	130.37	4.82	PASS	
14225.00†	7160.93	-1283.79	-6438.83	7145.51	7160.93	-1112.71	-5824.31	89.53	637.90	128.69	4.98	PASS	
14325.00†	7160.64	-1276.82	-6538.59	7145.22	7160.64	-1112.71	-5824.31	89.45	732.89	117.88	6.25	PASS	
14411.94	7160.39	-1270.75	-6625.32	7144.97	7160.39	-1112.71	-5824.31	89.38	816.45	110.88	7.40	PASS	
14425.00†	7160.35	-1269.89	-6638.35	7144.93	7160.35	-1112.71	-5824.31	89.36	829.08	109.98	7.58	PASS	
14525.00†	7160.06	-1266.21	-6738.27	7144.64	7160.06	-1112.71	-5824.31	89.06	926.76	104.82	8.89	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: **EX. WARD ENGLISH 42-20 AWB** Offset Wellpath: **EX. WARD ENGLISH 42-20 AWP**

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

WELLPATH COMPOSITION - Offset Wellbore: **EX. WARD ENGLISH 42-20 AWB** Offset Wellpath: **EX. WARD ENGLISH 42-20 AWP**

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
0.00	7000.00	BHI Generic gyro - continuous (Standard)	GTI GYRO TECHNOLOGIES GYRO SURVEY PROVIDED BY SRC <100'-7000'>	EX. WARD ENGLISH 42-20 AWB
7000.00	7295.00	Drift Indicator - Inclination Only (Actual Survey)	ASSUMED VERTICAL TO TD FROM COGCC <7295'>	EX. WARD ENGLISH 42-20 AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: **EX. WARD ENGLISH 42-20 AWB** Offset Wellpath: **EX. WARD ENGLISH 42-20 AWP**

MD Reference: Rig on SLOT#02 EX. WARD ENGLISH 42-20 (1980'FNL & 660'FEL, PA, CODL) (RT)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	0.00ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 47 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. LEFFLER I 21-6 AWB Offset Wellpath: EX. LEFFLER I 21-6 AWP

Facility: SEC.21-T06N-R66W Slot: SLOT#06 EX. LEFFLER I 21-6 (1880'FNL & 1880'FWL, SI, NB/CD) Well: EX. LEFFLER I 21-6 Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	-3.00	25.00	-949.57	-3179.37	-106.63	3318.14	25.57	134.83	PASS	
125.00†	125.00	0.00	0.00	97.00	125.00	-949.57	-3179.37	-106.63	3318.14	50.37	67.14	PASS	
225.00†	225.00	0.00	0.00	197.00	225.00	-949.57	-3179.37	-106.63	3318.14	51.29	65.91	PASS	
300.00	300.00	0.00	0.00	272.00	300.00	-949.57	-3179.37	-106.63	3318.14	52.51	64.35	PASS	
325.00†	325.00	-0.09	0.06	297.00	325.00	-949.57	-3179.37	109.58	3318.18	52.93	63.84	PASS	
425.00†	424.96	-2.20	1.61	396.96	424.96	-949.57	-3179.37	109.60	3319.06	55.17	61.21	PASS	
525.00†	524.77	-7.13	5.22	496.77	524.77	-949.57	-3179.37	109.66	3321.11	57.90	58.32	PASS	
625.00†	624.30	-14.86	10.88	596.30	624.30	-949.57	-3179.37	109.76	3324.36	60.98	55.37	PASS	
725.00†	723.44	-25.39	18.59	695.44	723.44	-949.57	-3179.37	109.88	3328.82	64.34	52.51	PASS	
825.00†	822.07	-38.71	28.34	794.07	822.07	-949.57	-3179.37	110.04	3334.52	67.89	49.81	PASS	
895.18	890.91	-49.71	36.39	862.91	890.91	-949.57	-3179.37	110.17	3339.29	70.48	48.02	PASS	
925.00†	920.09	-54.67	40.02	892.09	920.09	-949.57	-3179.37	110.26	3341.45	71.59	47.30	PASS	
1025.00†	1017.94	-71.32	52.20	989.94	1017.94	-949.57	-3179.37	110.59	3348.79	75.40	44.98	PASS	
1125.00†	1115.79	-87.96	64.39	1087.79	1115.79	-949.57	-3179.37	110.91	3356.24	79.32	42.82	PASS	
1225.00†	1213.64	-104.60	76.57	1185.64	1213.64	-949.57	-3179.37	111.23	3363.79	83.31	40.84	PASS	
1325.00†	1311.48	-121.25	88.76	1283.48	1311.48	-949.57	-3179.37	111.55	3371.46	87.38	39.00	PASS	
1425.00†	1409.33	-137.89	100.94	1381.33	1409.33	-949.57	-3179.37	111.87	3379.24	91.51	37.31	PASS	
1525.00†	1507.18	-154.53	113.12	1479.18	1507.18	-949.57	-3179.37	112.19	3387.12	95.68	35.75	PASS	
1625.00†	1605.03	-171.18	125.31	1577.03	1605.03	-949.57	-3179.37	112.51	3395.11	99.89	34.31	PASS	
1725.00†	1702.88	-187.82	137.49	1674.88	1702.88	-949.57	-3179.37	112.82	3403.21	104.14	32.98	PASS	
1825.00†	1800.73	-204.47	149.67	1772.73	1800.73	-949.57	-3179.37	113.14	3411.41	108.13	31.75	PASS	
1925.00†	1898.58	-221.11	161.86	1870.58	1898.58	-949.57	-3179.37	113.45	3419.71	112.37	30.62	PASS	
2025.00†	1996.43	-237.75	174.04	1968.43	1996.43	-949.57	-3179.37	113.76	3428.12	116.65	29.56	PASS	
2125.00†	2094.28	-254.40	186.22	2066.28	2094.28	-949.57	-3179.37	114.07	3436.64	120.95	28.58	PASS	
2225.00†	2192.13	-271.04	198.41	2164.13	2192.13	-949.57	-3179.37	114.38	3445.25	125.28	27.65	PASS	
2325.00†	2289.98	-287.68	210.59	2261.98	2289.98	-949.57	-3179.37	114.68	3453.97	129.64	26.78	PASS	
2425.00†	2387.83	-304.33	222.77	2359.83	2387.83	-949.57	-3179.37	114.99	3462.79	134.02	25.97	PASS	
2525.00†	2485.68	-320.97	234.96	2457.68	2485.68	-949.57	-3179.37	115.29	3471.71	138.42	25.20	PASS	
2625.00†	2583.53	-337.62	247.14	2555.53	2583.53	-949.57	-3179.37	115.59	3480.73	142.84	24.48	PASS	
2725.00†	2681.38	-354.26	259.33	2653.38	2681.38	-949.57	-3179.37	115.89	3489.84	147.29	23.80	PASS	
2825.00†	2779.23	-370.90	271.51	2751.23	2779.23	-949.57	-3179.37	116.19	3499.06	151.75	23.16	PASS	
2925.00†	2877.08	-387.55	283.69	2849.08	2877.08	-949.57	-3179.37	116.49	3508.37	156.23	22.55	PASS	
3025.00†	2974.93	-404.19	295.88	2946.93	2974.93	-949.57	-3179.37	116.78	3517.78	160.73	21.98	PASS	
3125.00†	3072.78	-420.83	308.06	3044.78	3072.78	-949.57	-3179.37	117.08	3527.28	165.24	21.43	PASS	
3225.00†	3170.63	-437.48	320.24	3142.63	3170.63	-949.57	-3179.37	117.37	3536.88	169.77	20.92	PASS	
3325.00†	3268.48	-454.12	332.43	3240.48	3268.48	-949.57	-3179.37	117.66	3546.57	174.32	20.42	PASS	
3425.00†	3366.33	-470.77	344.61	3338.33	3366.33	-949.57	-3179.37	117.95	3556.36	178.87	19.96	PASS	
3525.00†	3464.18	-487.41	356.79	3436.18	3464.18	-949.57	-3179.37	118.24	3566.24	183.45	19.51	PASS	
3625.00†	3562.03	-504.05	368.98	3534.03	3562.03	-949.57	-3179.37	118.52	3576.20	188.03	19.09	PASS	
3725.00†	3659.88	-520.70	381.16	3631.88	3659.88	-949.57	-3179.37	118.81	3586.27	192.63	18.68	PASS	
3825.00†	3757.73	-537.34	393.34	3729.73	3757.73	-949.57	-3179.37	119.09	3596.42	197.24	18.30	PASS	
3925.00†	3855.57	-553.98	405.53	3827.57	3855.57	-949.57	-3179.37	119.37	3606.66	201.87	17.93	PASS	
4025.00†	3953.42	-570.63	417.71	3925.42	3953.42	-949.57	-3179.37	119.65	3616.98	206.50	17.57	PASS	
4125.00†	4051.27	-587.27	429.90	4023.27	4051.27	-949.57	-3179.37	119.93	3627.40	211.15	17.23	PASS	
4225.00†	4149.12	-603.92	442.08	4121.12	4149.12	-949.57	-3179.37	120.21	3637.91	215.80	16.91	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 48 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. LEFFLER I 21-6 AWB Offset Wellpath: EX. LEFFLER I 21-6 AWP

Facility: SEC.21-T06N-R66W Slot: SLO#06 EX. LEFFLER I 21-6 (1880'FNL & 1880'FWL, SI, NB/CD) Well: EX. LEFFLER I 21-6 Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
4325.00†	4246.97	-620.56	454.26	4218.97	4246.97	-949.57	-3179.37	120.48	3648.50	220.47	16.60	PASS	
4425.00†	4344.82	-637.20	466.45	4316.82	4344.82	-949.57	-3179.37	120.76	3659.17	225.14	16.30	PASS	
4525.00†	4442.67	-653.85	478.63	4414.67	4442.67	-949.57	-3179.37	121.03	3669.93	229.83	16.01	PASS	
4625.00†	4540.52	-670.49	490.81	4512.52	4540.52	-949.57	-3179.37	121.30	3680.78	234.52	15.74	PASS	
4725.00†	4638.37	-687.13	503.00	4610.37	4638.37	-949.57	-3179.37	121.57	3691.70	239.22	15.47	PASS	
4825.00†	4736.22	-703.78	515.18	4708.22	4736.22	-949.57	-3179.37	121.84	3702.72	243.93	15.22	PASS	
4925.00†	4834.07	-720.42	527.36	4806.07	4834.07	-949.57	-3179.37	122.10	3713.81	248.65	14.98	PASS	
5025.00†	4931.92	-737.07	539.55	4903.92	4931.92	-949.57	-3179.37	122.37	3724.98	253.38	14.74	PASS	
5125.00†	5029.77	-753.71	551.73	5001.77	5029.77	-949.57	-3179.37	122.63	3736.24	258.11	14.51	PASS	
5225.00†	5127.62	-770.35	563.91	5099.62	5127.62	-949.57	-3179.37	122.89	3747.57	262.85	14.29	PASS	
5325.00†	5225.47	-787.00	576.10	5197.47	5225.47	-949.57	-3179.37	123.15	3758.98	267.60	14.08	PASS	
5425.00†	5323.32	-803.64	588.28	5295.32	5323.32	-949.57	-3179.37	123.41	3770.47	272.35	13.88	PASS	
5525.00†	5421.17	-820.28	600.47	5393.17	5421.17	-949.57	-3179.37	123.67	3782.04	277.11	13.68	PASS	
5625.00†	5519.02	-836.93	612.65	5491.02	5519.02	-949.57	-3179.37	123.92	3793.69	281.88	13.49	PASS	
5725.00†	5616.87	-853.57	624.83	5588.87	5616.87	-949.57	-3179.37	124.18	3805.41	286.65	13.31	PASS	
5825.00†	5714.72	-870.22	637.02	5686.72	5714.72	-949.57	-3179.37	124.43	3817.21	291.43	13.13	PASS	
5925.00†	5812.57	-886.86	649.20	5784.57	5812.57	-949.57	-3179.37	124.68	3829.08	296.21	12.96	PASS	
6025.00†	5910.42	-903.50	661.38	5882.42	5910.42	-949.57	-3179.37	124.93	3841.03	301.00	12.79	PASS	
6125.00†	6008.27	-920.15	673.57	5980.27	6008.27	-949.57	-3179.37	125.18	3853.05	305.79	12.63	PASS	
6225.00†	6106.12	-936.79	685.75	6078.12	6106.12	-949.57	-3179.37	125.43	3865.14	310.59	12.47	PASS	
6325.00†	6203.97	-953.43	697.93	6175.97	6203.97	-949.57	-3179.37	125.67	3877.30	315.39	12.32	PASS	
6425.00†	6301.82	-970.08	710.12	6273.82	6301.82	-949.57	-3179.37	125.91	3889.54	320.20	12.17	PASS	
6525.00†	6399.66	-986.72	722.30	6371.66	6399.66	-949.57	-3179.37	126.16	3901.85	325.01	12.03	PASS	
6605.93	6478.85	-1000.19	732.16	6450.85	6478.85	-949.57	-3179.37	126.35	3911.86	328.90	11.92	PASS	
6625.00†	6497.54	-1003.38	734.20	6469.54	6497.54	-949.57	-3179.37	119.10	3913.94	329.82	11.89	PASS	
6725.00†	6595.97	-1020.39	735.57	6567.97	6595.97	-949.57	-3179.37	70.68	3915.58	334.80	11.72	PASS	
6825.00†	6693.34	-1037.59	721.30	6665.34	6693.34	-949.57	-3179.37	40.39	3901.66	340.22	11.49	PASS	
6925.00†	6787.24	-1054.57	691.74	6759.24	6787.24	-949.57	-3179.37	27.97	3872.53	345.52	11.23	PASS	
7025.00†	6875.37	-1070.91	647.62	6847.37	6875.37	-949.57	-3179.37	22.27	3828.91	350.31	10.95	PASS	
7125.00†	6955.55	-1086.20	590.03	6927.55	6955.55	-949.57	-3179.37	19.51	3771.87	354.56	10.66	PASS	
7225.00†	7025.81	-1100.06	520.38	6997.81	7025.81	-949.57	-3179.37	18.44	3702.81	358.19	10.36	PASS	
7325.00†	7084.42	-1112.16	440.40	7056.42	7084.42	-949.57	-3179.37	18.75	3623.42	361.16	10.05	PASS	
7425.00†	7129.94	-1122.20	352.04	7101.94	7129.94	-949.57	-3179.37	20.83	3535.63	363.41	9.75	PASS	
7525.00†	7161.25	-1129.93	257.49	7133.25	7161.25	-949.57	-3179.37	26.66	3441.59	364.92	9.45	PASS	
7625.00†	7177.57	-1135.16	159.08	7149.57	7177.57	-949.57	-3179.37	47.72	3343.60	365.71	9.16	PASS	
7682.94	7180.00	-1136.99	101.24	7152.00	7180.00	-949.57	-3179.37	92.06	3285.96	365.84	9.00	PASS	
7725.00†	7179.88	-1138.00	59.19	7151.88	7179.88	-949.57	-3179.37	92.03	3244.04	365.84	8.88	PASS	
7825.00†	7179.59	-1140.39	-40.78	7151.59	7179.59	-949.57	-3179.37	91.97	3144.38	365.86	8.61	PASS	
7925.00†	7179.29	-1142.78	-140.75	7151.29	7179.29	-949.57	-3179.37	91.91	3044.75	365.88	8.34	PASS	
8025.00†	7179.00	-1145.17	-240.72	7151.00	7179.00	-949.57	-3179.37	91.84	2945.15	365.91	8.06	PASS	
8125.00†	7178.71	-1147.56	-340.69	7150.71	7178.71	-949.57	-3179.37	91.78	2845.57	365.95	7.79	PASS	
8225.00†	7178.42	-1149.95	-440.66	7150.42	7178.42	-949.57	-3179.37	91.72	2746.03	366.01	7.52	PASS	
8325.00†	7178.13	-1152.34	-540.63	7150.13	7178.13	-949.57	-3179.37	91.65	2646.51	366.08	7.24	PASS	
8425.00†	7177.84	-1154.73	-640.61	7149.84	7177.84	-949.57	-3179.37	91.59	2547.04	366.17	6.97	PASS	
8525.00†	7177.55	-1157.12	-740.58	7149.55	7177.55	-949.57	-3179.37	91.53	2447.61	366.28	6.69	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 49 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. LEFFLER I 21-6 AWB Offset Wellpath: EX. LEFFLER I 21-6 AWP

Facility: SEC.21-T06N-R66W Slot: SLOT#06 EX. LEFFLER I 21-6 (1880'FNL & 1880'FWL, SI, NB/CD) Well: EX. LEFFLER I 21-6 Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
8625.00†	7177.25	-1159.52	-840.55	7149.25	7177.25	-949.57	-3179.37	91.47	2348.22	366.41	6.42	PASS	
8725.00†	7176.96	-1161.91	-940.52	7148.96	7176.96	-949.57	-3179.37	91.40	2248.90	366.57	6.14	PASS	
8825.00†	7176.67	-1164.30	-1040.49	7148.67	7176.67	-949.57	-3179.37	91.34	2149.63	366.76	5.87	PASS	
8925.00†	7176.38	-1166.69	-1140.46	7148.38	7176.38	-949.57	-3179.37	91.28	2050.43	367.00	5.60	PASS	
9025.00†	7176.09	-1169.08	-1240.43	7148.09	7176.09	-949.57	-3179.37	91.21	1951.32	367.29	5.32	PASS	
9125.00†	7175.80	-1171.47	-1340.40	7147.80	7175.80	-949.57	-3179.37	91.15	1852.30	367.64	5.05	PASS	
9225.00†	7175.51	-1173.86	-1440.37	7147.51	7175.51	-949.57	-3179.37	91.09	1753.40	368.08	4.77	PASS	
9325.00†	7175.21	-1176.25	-1540.34	7147.21	7175.21	-949.57	-3179.37	91.03	1654.62	368.60	4.50	PASS	
9425.00†	7174.92	-1178.64	-1640.32	7146.92	7174.92	-949.57	-3179.37	90.96	1556.01	369.26	4.22	PASS	
9525.00†	7174.63	-1181.03	-1740.29	7146.63	7174.63	-949.57	-3179.37	90.90	1457.58	370.06	3.94	PASS	
9625.00†	7174.34	-1183.42	-1840.26	7146.34	7174.34	-949.57	-3179.37	90.84	1359.38	371.07	3.67	PASS	
9725.00†	7174.05	-1185.82	-1940.23	7146.05	7174.05	-949.57	-3179.37	90.78	1261.46	372.34	3.39	PASS	
9825.00†	7173.76	-1188.21	-2040.20	7145.76	7173.76	-949.57	-3179.37	90.71	1163.90	373.96	3.12	PASS	
9925.00†	7173.47	-1190.60	-2140.17	7145.47	7173.47	-949.57	-3179.37	90.65	1066.78	376.03	2.84	PASS	
10025.00†	7173.17	-1192.99	-2240.14	7145.17	7173.17	-949.57	-3179.37	90.59	970.26	378.71	2.56	PASS	
10125.00†	7172.88	-1195.38	-2340.11	7144.88	7172.88	-949.57	-3179.37	90.52	874.51	382.23	2.29	PASS	
10225.00†	7172.59	-1197.77	-2440.08	7144.59	7172.59	-949.57	-3179.37	90.46	779.84	386.90	2.02	PASS	
10325.00†	7172.30	-1200.16	-2540.05	7144.30	7172.30	-949.57	-3179.37	90.40	686.67	393.21	1.75	PASS	
10425.00†	7172.01	-1202.55	-2640.03	7144.01	7172.01	-949.57	-3179.37	90.34	595.73	401.82	1.48	PASS	
10525.00†	7171.72	-1204.94	-2740.00	7143.72	7171.72	-949.57	-3179.37	90.27	508.20	413.72	1.23	PASS	
10625.00†	7171.42	-1207.33	-2839.97	7143.42	7171.42	-949.57	-3179.37	90.21	426.19	430.19	0.99	FAIL	
10725.00†	7171.13	-1209.72	-2939.94	7143.13	7171.13	-949.57	-3179.37	90.15	353.56	452.26	0.78	FAIL	
10825.00†	7170.84	-1212.11	-3039.91	7142.84	7170.84	-949.57	-3179.37	90.08	297.29	478.24	0.62	FAIL	
10925.00†	7170.55	-1214.51	-3139.88	7142.55	7170.55	-949.57	-3179.37	90.02	267.86	498.47	0.54	FAIL	
10959.14†	7170.45	-1215.32	-3174.01	7142.23	7170.23	-949.57	-3179.37	89.95	265.81	501.23	0.53	FAIL	
10962.74†	7170.44	-1215.41	-3177.61	7142.44	7170.44	-949.57	-3179.37	90.00	265.84	501.38	0.53	FAIL	
11025.00†	7170.26	-1216.90	-3239.85	7142.26	7170.26	-949.57	-3179.37	89.96	274.08	498.94	0.55	FAIL	
11125.00†	7169.97	-1219.29	-3339.82	7141.97	7169.97	-949.57	-3179.37	89.90	313.84	481.62	0.65	FAIL	
11225.00†	7169.68	-1221.68	-3439.79	7141.68	7169.68	-949.57	-3179.37	89.83	376.65	460.16	0.82	FAIL	
11325.00†	7169.38	-1224.07	-3539.76	7141.38	7169.38	-949.57	-3179.37	89.77	453.03	441.85	1.03	PASS	
11425.00†	7169.09	-1226.46	-3639.74	7141.09	7169.09	-949.57	-3179.37	89.71	537.22	427.80	1.26	PASS	
11525.00†	7168.80	-1228.85	-3739.71	7140.80	7168.80	-949.57	-3179.37	89.64	626.08	417.23	1.50	PASS	
11625.00†	7168.51	-1231.24	-3839.68	7140.51	7168.51	-949.57	-3179.37	89.58	717.88	409.24	1.76	PASS	
11725.00†	7168.22	-1233.63	-3939.65	7140.22	7168.22	-949.57	-3179.37	89.52	811.61	403.10	2.02	PASS	
11825.00†	7167.93	-1236.02	-4039.62	7139.93	7167.93	-949.57	-3179.37	89.46	906.69	398.30	2.28	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: EX. LEFFLER I 21-6 AWB Offset Wellpath: EX. LEFFLER I 21-6 AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 50 of 202



REFERENCE WELLPATH IDENTIFICATION			
Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

WELLPATH COMPOSITION - Offset Wellbore: EX. LEFFLER I 21-6 AWB Offset Wellpath: EX. LEFFLER I 21-6 AWP				
Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
0.00	7310.00	Drift Indicator - Inclination Only (Actual Survey)	ASSUMED VERTICAL TO TD FROM COGCC <7310>	EX. LEFFLER I 21-6 AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: EX. LEFFLER I 21-6 AWB Offset Wellpath: EX. LEFFLER I 21-6 AWP	
MD Reference: Rig on SLOT#06 EX. LEFFLER I 21-6 (1880'FNL & 1880'FWL, SI, NB/CD) (RT)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	0.00ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 51 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DONN 31C-20-L2 PWB Offset Wellpath: DONN 31C-20-L2 PWP (REV-A.0)

Facility: SEC.21-T06N-R66W Slot: SLOT#20 DONN 31C-20-L2 (878'FNL & 251'FEL, SEC.21) Well: DONN 31C-20-L2 Threshold Value=1.00 † = interpolated/extrapolated station														
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status		
25.00	25.00	0.00	0.00	26.00	25.00	60.11	0.28	0.27	60.11	1.57	98.31	PASS		
125.00†	125.00	0.00	0.00	126.00	125.00	60.11	0.28	0.27	60.11	1.89	63.86	PASS		
225.00†	225.00	0.00	0.00	226.00	225.00	60.11	0.28	0.27	60.11	2.46	39.51	PASS		
300.00	300.00	0.00	0.00	301.01	300.01	60.11	0.28	0.27	60.11	2.91	30.43	PASS		
325.00†	325.00	-0.09	0.06	326.32	325.32	60.04	0.38	-143.50	60.13	3.06	28.24	PASS		
425.00†	424.96	-2.20	1.61	427.53	426.48	58.47	2.60	-142.88	60.70	3.96	19.95	PASS		
525.00†	524.77	-7.13	5.22	528.71	527.47	54.84	7.73	-141.51	62.08	5.25	14.26	PASS		
625.00†	624.30	-14.86	10.88	629.84	628.12	49.16	15.77	-139.50	64.32	6.26	11.95	PASS		
725.00†	723.44	-25.39	18.59	730.89	728.26	41.44	26.69	-136.99	67.49	7.15	10.76	PASS		
825.00†	822.07	-38.71	28.34	830.74	827.00	32.85	38.84	-135.46	72.49	7.95	10.24	PASS		
895.18	890.91	-49.71	36.39	900.74	896.22	26.82	47.36	-135.59	77.50	8.55	10.09	PASS		
925.00†	920.09	-54.67	40.02	930.46	925.61	24.26	50.98	-135.85	79.88	8.78	10.10	PASS		
1025.00†	1017.94	-71.32	52.20	1030.13	1024.17	15.69	63.11	-136.61	87.90	9.53	10.15	PASS		
1125.00†	1115.79	-87.96	64.39	1129.80	1122.72	7.11	75.24	-137.25	95.94	10.30	10.17	PASS		
1225.00†	1213.64	-104.60	76.57	1229.48	1221.28	-1.47	87.37	-137.79	103.98	11.08	10.19	PASS		
1325.00†	1311.48	-121.25	88.76	1329.15	1319.84	-10.05	99.50	-138.25	112.03	11.88	10.18	PASS		
1425.00†	1409.33	-137.89	100.94	1428.82	1418.40	-18.63	111.64	-138.65	120.09	12.68	10.16	PASS		
1525.00†	1507.18	-154.53	113.12	1528.49	1516.96	-27.20	123.77	-139.00	128.15	13.50	10.15	PASS		
1625.00†	1605.03	-171.18	125.31	1628.16	1615.51	-35.78	135.90	-139.31	136.21	14.32	10.13	PASS		
1725.00†	1702.88	-187.82	137.49	1727.83	1714.07	-44.36	148.03	-139.58	144.28	15.14	10.11	PASS		
1825.00†	1800.73	-204.47	149.67	1827.51	1812.63	-52.94	160.16	-139.82	152.35	15.33	10.37	PASS		
1925.00†	1898.58	-221.11	161.86	1927.18	1911.19	-61.52	172.30	-140.04	160.43	15.47	10.82	PASS		
2025.00†	1996.43	-237.75	174.04	2026.85	2009.75	-70.10	184.43	-140.24	168.51	15.69	11.20	PASS		
2125.00†	2094.28	-254.40	186.22	2126.52	2108.30	-78.67	196.56	-140.42	176.59	16.00	11.50	PASS		
2225.00†	2192.13	-271.04	198.41	2226.19	2206.86	-87.25	208.69	-140.59	184.67	16.38	11.74	PASS		
2325.00†	2289.98	-287.68	210.59	2325.86	2305.42	-95.83	220.82	-140.74	192.75	16.82	11.92	PASS		
2425.00†	2387.83	-304.33	222.77	2425.54	2403.98	-104.41	232.95	-140.88	200.83	17.34	12.03	PASS		
2525.00†	2485.68	-320.97	234.96	2525.21	2502.54	-112.99	245.09	-141.01	208.91	17.91	12.10	PASS		
2625.00†	2583.53	-337.62	247.14	2624.88	2601.09	-121.56	257.22	-141.13	217.00	18.54	12.13	PASS		
2725.00†	2681.38	-354.26	259.33	2724.55	2699.65	-130.14	269.35	-141.24	225.08	19.21	12.13	PASS		
2825.00†	2779.23	-370.90	271.51	2824.22	2798.21	-138.72	281.48	-141.34	233.17	19.93	12.09	PASS		
2925.00†	2877.08	-387.55	283.69	2923.89	2896.77	-147.30	293.61	-141.43	241.26	20.68	12.04	PASS		
3025.00†	2974.93	-404.19	295.88	3023.57	2995.33	-155.88	305.74	-141.52	249.35	21.47	11.97	PASS		
3125.00†	3072.78	-420.83	308.06	3123.24	3093.88	-164.45	317.88	-141.61	257.44	22.29	11.89	PASS		
3225.00†	3170.63	-437.48	320.24	3222.91	3192.44	-173.03	330.01	-141.69	265.52	23.14	11.81	PASS		
3325.00†	3268.48	-454.12	332.43	3322.58	3291.00	-181.61	342.14	-141.76	273.61	24.01	11.71	PASS		
3425.00†	3366.33	-470.77	344.61	3422.25	3389.56	-190.19	354.27	-141.83	281.70	24.90	11.61	PASS		
3525.00†	3464.18	-487.41	356.79	3521.92	3488.12	-198.77	366.40	-141.90	289.79	25.81	11.52	PASS		
3625.00†	3562.03	-504.05	368.98	3621.60	3586.67	-207.34	378.54	-141.96	297.88	26.74	11.42	PASS		
3725.00†	3659.88	-520.70	381.16	3721.27	3685.23	-215.92	390.67	-142.02	305.98	27.69	11.32	PASS		
3825.00†	3757.73	-537.34	393.34	3820.94	3783.79	-224.50	402.80	-142.07	314.07	28.64	11.22	PASS		
3925.00†	3855.57	-553.98	405.53	3920.61	3882.35	-233.08	414.93	-142.13	322.16	29.61	11.12	PASS		
4025.00†	3953.42	-570.63	417.71	4020.28	3980.91	-241.66	427.06	-142.18	330.25	30.60	11.03	PASS		
4125.00†	4051.27	-587.27	429.90	4119.95	4079.46	-250.24	439.19	-142.22	338.34	31.59	10.93	PASS		
4225.00†	4149.12	-603.92	442.08	4219.63	4178.02	-258.81	451.33	-142.27	346.43	32.59	10.84	PASS		

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 52 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DONN 31C-20-L2 PWB Offset Wellpath: DONN 31C-20-L2 PWP (REV-A.0)

Facility: SEC.21-T06N-R66W Slot: SLOT#20 DONN 31C-20-L2 (878'FNL & 251'FEL, SEC.21) Well: DONN 31C-20-L2 Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
4325.00†	4246.97	-620.56	454.26	4319.30	4276.58	-267.39	463.46	-142.31	354.53	33.60	10.76	PASS	
4425.00†	4344.82	-637.20	466.45	4418.97	4375.14	-275.97	475.59	-142.35	362.62	34.62	10.67	PASS	
4525.00†	4442.67	-653.85	478.63	4518.64	4473.70	-284.55	487.72	-142.40	370.71	35.64	10.59	PASS	
4625.00†	4540.52	-670.49	490.81	4618.31	4572.25	-293.13	499.85	-142.43	378.80	36.67	10.51	PASS	
4725.00†	4638.37	-687.13	503.00	4717.98	4670.81	-301.70	511.98	-142.47	386.90	37.71	10.44	PASS	
4825.00†	4736.22	-703.78	515.18	4817.66	4769.37	-310.28	524.12	-142.51	394.99	38.75	10.36	PASS	
4925.00†	4834.07	-720.42	527.36	4917.33	4867.93	-318.86	536.25	-142.54	403.08	39.80	10.29	PASS	
5025.00†	4931.92	-737.07	539.55	5017.00	4966.49	-327.44	548.38	-142.57	411.18	40.85	10.23	PASS	
5125.00†	5029.77	-753.71	551.73	5116.67	5065.04	-336.02	560.51	-142.60	419.27	41.91	10.16	PASS	
5225.00†	5127.62	-770.35	563.91	5216.34	5163.60	-344.59	572.64	-142.63	427.37	42.97	10.10	PASS	
5325.00†	5225.47	-787.00	576.10	5316.01	5262.16	-353.17	584.78	-142.66	435.46	44.03	10.03	PASS	
5425.00†	5323.32	-803.64	588.28	5415.69	5360.72	-361.75	596.91	-142.69	443.55	45.10	9.98	PASS	
5525.00†	5421.17	-820.28	600.47	5515.36	5459.28	-370.33	609.04	-142.72	451.65	46.17	9.92	PASS	
5625.00†	5519.02	-836.93	612.65	5615.03	5557.83	-378.91	621.17	-142.74	459.74	47.24	9.86	PASS	
5725.00†	5616.87	-853.57	624.83	5714.70	5656.39	-387.48	633.30	-142.77	467.84	48.32	9.81	PASS	
5825.00†	5714.72	-870.22	637.02	5814.37	5754.95	-396.06	645.43	-142.79	475.93	49.40	9.76	PASS	
5925.00†	5812.57	-886.86	649.20	5914.04	5853.51	-404.64	657.57	-142.81	484.03	50.48	9.71	PASS	
6025.00†	5910.42	-903.50	661.38	6013.72	5952.07	-413.22	669.70	-142.84	492.12	51.56	9.66	PASS	
6125.00†	6008.27	-920.15	673.57	6113.39	6050.62	-421.80	681.83	-142.86	500.22	52.65	9.62	PASS	
6225.00†	6106.12	-936.79	685.75	6213.06	6149.18	-430.37	693.96	-142.88	508.31	53.73	9.57	PASS	
6325.00†	6203.97	-953.43	697.93	6312.73	6247.74	-438.95	706.09	-142.90	516.40	54.82	9.53	PASS	
6425.00†	6301.82	-970.08	710.12	6412.40	6346.30	-447.53	718.22	-142.92	524.50	55.91	9.49	PASS	
6525.00†	6399.66	-986.72	722.30	6512.07	6444.86	-456.11	730.36	-142.94	532.59	57.01	9.45	PASS	
6605.93	6478.85	-1000.19	732.16	6594.27	6526.31	-463.24	738.44	-143.16	539.08	57.90	9.41	PASS	
6625.00†	6497.54	-1003.38	734.20	6613.78	6545.73	-464.98	739.00	-150.75	540.57	58.10	9.41	PASS	
6725.00†	6595.97	-1020.39	735.57	6715.32	6646.52	-474.20	732.29	159.01	548.53	59.33	9.35	PASS	
6825.00†	6693.34	-1037.59	721.30	6815.59	6743.74	-483.47	709.96	126.85	556.52	60.78	9.25	PASS	
6925.00†	6787.24	-1054.57	691.74	6914.67	6835.15	-492.57	673.14	112.53	564.35	62.12	9.18	PASS	
7025.00†	6875.37	-1070.91	647.62	7012.62	6918.84	-501.28	623.17	104.88	571.81	63.42	9.11	PASS	
7125.00†	6955.55	-1086.20	590.03	7109.55	6993.15	-509.42	561.61	100.08	578.70	65.08	8.98	PASS	
7225.00†	7025.81	-1100.06	520.38	7205.57	7056.72	-516.82	490.16	96.77	584.84	67.29	8.77	PASS	
7325.00†	7084.42	-1112.16	440.40	7300.78	7108.47	-523.36	410.60	94.40	590.05	70.20	8.48	PASS	
7425.00†	7129.94	-1122.20	352.04	7395.31	7147.57	-528.91	324.82	92.70	594.18	73.95	8.10	PASS	
7525.00†	7161.25	-1129.93	257.49	7489.26	7173.47	-533.37	234.72	91.54	597.12	78.06	7.71	PASS	
7625.00†	7177.57	-1135.16	159.08	7582.74	7185.86	-536.67	142.20	90.85	598.79	82.77	7.29	PASS	
7682.94	7180.00	-1136.99	101.24	7637.73	7186.95	-538.06	87.25	90.66	599.13	85.67	7.04	PASS	
7725.00†	7179.88	-1138.00	59.19	7679.79	7186.79	-539.04	45.21	90.66	599.16	87.95	6.86	PASS	
7825.00†	7179.59	-1140.39	-40.78	7779.79	7186.41	-541.37	-54.77	90.65	599.22	93.74	6.43	PASS	
7925.00†	7179.29	-1142.78	-140.75	7879.79	7186.03	-543.70	-154.74	90.64	599.28	100.06	6.02	PASS	
8025.00†	7179.00	-1145.17	-240.72	7979.79	7185.65	-546.03	-254.71	90.64	599.34	106.81	5.64	PASS	
8125.00†	7178.71	-1147.56	-340.69	8079.79	7185.27	-548.36	-354.68	90.63	599.40	113.91	5.29	PASS	
8225.00†	7178.42	-1149.95	-440.66	8179.79	7184.89	-550.69	-454.65	90.62	599.46	121.30	4.96	PASS	
8325.00†	7178.13	-1152.34	-540.63	8279.79	7184.52	-553.02	-554.63	90.61	599.52	128.93	4.67	PASS	
8425.00†	7177.84	-1154.73	-640.61	8379.79	7184.14	-555.35	-654.60	90.60	599.58	136.76	4.40	PASS	
8525.00†	7177.55	-1157.12	-740.58	8479.79	7183.76	-557.68	-754.57	90.59	599.64	144.75	4.16	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 53 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DONN 31C-20-L2 PWB Offset Wellpath: DONN 31C-20-L2 PWP (REV-A.0)

Facility: SEC.21-T06N-R66W Slot: SLOT#20 DONN 31C-20-L2 (878'FNL & 251'FEL, SEC.21) Well: DONN 31C-20-L2 Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
8625.00†	7177.25	-1159.52	-840.55	8579.79	7183.38	-560.01	-854.54	90.59	599.70	152.89	3.94	PASS	
8725.00†	7176.96	-1161.91	-940.52	8679.79	7183.00	-562.34	-954.51	90.58	599.76	161.14	3.73	PASS	
8825.00†	7176.67	-1164.30	-1040.49	8779.79	7182.62	-564.67	-1054.49	90.57	599.82	169.50	3.55	PASS	
8925.00†	7176.38	-1166.69	-1140.46	8879.79	7182.25	-567.00	-1154.46	90.56	599.88	177.94	3.38	PASS	
9025.00†	7176.09	-1169.08	-1240.43	8979.79	7181.87	-569.33	-1254.43	90.55	599.94	186.45	3.23	PASS	
9125.00†	7175.80	-1171.47	-1340.40	9079.79	7181.49	-571.66	-1354.40	90.54	600.00	195.04	3.08	PASS	
9225.00†	7175.51	-1173.86	-1440.37	9179.79	7181.11	-573.99	-1454.38	90.54	600.06	203.68	2.95	PASS	
9325.00†	7175.21	-1176.25	-1540.34	9279.79	7180.73	-576.32	-1554.35	90.53	600.12	212.37	2.83	PASS	
9425.00†	7174.92	-1178.64	-1640.32	9379.79	7180.35	-578.65	-1654.32	90.52	600.18	221.10	2.72	PASS	
9525.00†	7174.63	-1181.03	-1740.29	9479.79	7179.98	-580.98	-1754.29	90.51	600.24	229.87	2.62	PASS	
9625.00†	7174.34	-1183.42	-1840.26	9579.79	7179.60	-583.31	-1854.26	90.50	600.30	238.68	2.52	PASS	
9725.00†	7174.05	-1185.82	-1940.23	9679.79	7179.22	-585.64	-1954.24	90.49	600.36	247.52	2.43	PASS	
9825.00†	7173.76	-1188.21	-2040.20	9779.79	7178.84	-587.97	-2054.21	90.49	600.42	256.38	2.35	PASS	
9925.00†	7173.47	-1190.60	-2140.17	9879.79	7178.46	-590.30	-2154.18	90.48	600.48	265.28	2.27	PASS	
10025.00†	7173.17	-1192.99	-2240.14	9979.79	7178.08	-592.63	-2254.15	90.47	600.54	274.19	2.19	PASS	
10125.00†	7172.88	-1195.38	-2340.11	10079.79	7177.71	-594.96	-2354.12	90.46	600.60	283.12	2.12	PASS	
10225.00†	7172.59	-1197.77	-2440.08	10179.79	7177.33	-597.29	-2454.10	90.45	600.66	292.08	2.06	PASS	
10325.00†	7172.30	-1200.16	-2540.05	10279.79	7176.95	-599.62	-2554.07	90.44	600.72	301.05	2.00	PASS	
10425.00†	7172.01	-1202.55	-2640.03	10379.79	7176.57	-601.95	-2654.04	90.44	600.78	310.03	1.94	PASS	
10525.00†	7171.72	-1204.94	-2740.00	10479.79	7176.19	-604.28	-2754.01	90.43	600.84	319.03	1.89	PASS	
10625.00†	7171.42	-1207.33	-2839.97	10579.79	7175.81	-606.61	-2853.98	90.42	600.90	328.04	1.83	PASS	
10725.00†	7171.13	-1209.72	-2939.94	10679.79	7175.44	-608.94	-2953.96	90.41	600.96	337.07	1.78	PASS	
10825.00†	7170.84	-1212.11	-3039.91	10779.79	7175.06	-611.27	-3053.93	90.40	601.02	346.10	1.74	PASS	
10925.00†	7170.55	-1214.51	-3139.88	10879.79	7174.68	-613.60	-3153.90	90.39	601.08	355.15	1.69	PASS	
11025.00†	7170.26	-1216.90	-3239.85	10979.79	7174.30	-615.93	-3253.87	90.39	601.14	364.20	1.65	PASS	
11125.00†	7169.97	-1219.29	-3339.82	11079.79	7173.92	-618.26	-3353.84	90.38	601.20	373.27	1.61	PASS	
11225.00†	7169.68	-1221.68	-3439.79	11179.79	7173.54	-620.59	-3453.82	90.37	601.26	382.34	1.57	PASS	
11325.00†	7169.38	-1224.07	-3539.76	11279.79	7173.17	-622.92	-3553.79	90.36	601.32	391.42	1.54	PASS	
11425.00†	7169.09	-1226.46	-3639.74	11379.79	7172.79	-625.25	-3653.76	90.35	601.38	400.50	1.50	PASS	
11525.00†	7168.80	-1228.85	-3739.71	11479.79	7172.41	-627.58	-3753.73	90.34	601.44	409.60	1.47	PASS	
11625.00†	7168.51	-1231.24	-3839.68	11579.79	7172.03	-629.91	-3853.71	90.34	601.50	418.70	1.44	PASS	
11725.00†	7168.22	-1233.63	-3939.65	11679.79	7171.65	-632.24	-3953.68	90.33	601.56	427.80	1.41	PASS	
11825.00†	7167.93	-1236.02	-4039.62	11779.78	7171.27	-634.57	-4053.65	90.32	601.62	436.91	1.38	PASS	
11925.00†	7167.64	-1238.41	-4139.59	11879.78	7170.90	-636.90	-4153.62	90.31	601.69	446.03	1.35	PASS	
12025.00†	7167.34	-1240.81	-4239.56	11979.78	7170.52	-639.23	-4253.59	90.30	601.75	455.14	1.32	PASS	
12125.00†	7167.05	-1243.20	-4339.53	12079.78	7170.14	-641.56	-4353.57	90.29	601.81	464.27	1.30	PASS	
12225.00†	7166.76	-1245.59	-4439.50	12179.78	7169.76	-643.89	-4453.54	90.29	601.87	473.40	1.27	PASS	
12325.00†	7166.47	-1247.98	-4539.47	12279.78	7169.38	-646.22	-4553.51	90.28	601.93	482.53	1.25	PASS	
12425.00†	7166.18	-1250.37	-4639.45	12379.78	7169.00	-648.55	-4653.48	90.27	601.99	491.67	1.22	PASS	
12525.00†	7165.89	-1252.76	-4739.42	12479.78	7168.63	-650.88	-4753.45	90.26	602.05	500.81	1.20	PASS	
12625.00†	7165.60	-1255.15	-4839.39	12579.78	7168.25	-653.21	-4853.43	90.25	602.11	509.95	1.18	PASS	
12725.00†	7165.30	-1257.54	-4939.36	12679.78	7167.87	-655.54	-4953.40	90.24	602.17	519.09	1.16	PASS	
12825.00†	7165.01	-1259.93	-5039.33	12779.78	7167.49	-657.87	-5053.37	90.24	602.23	528.24	1.14	PASS	
12925.00†	7164.72	-1262.32	-5139.30	12879.78	7167.11	-660.20	-5153.34	90.23	602.29	537.40	1.12	PASS	
13025.00†	7164.43	-1264.71	-5239.27	12979.78	7166.73	-662.53	-5253.31	90.22	602.35	546.55	1.10	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 54 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DONN 31C-20-L2 PWB Offset Wellpath: DONN 31C-20-L2 PWP (REV-A.0)

Facility: SEC.21-T06N-R66W Slot: SLOT#20 DONN 31C-20-L2 (878'FNL & 251'FEL, SEC.21) Well: DONN 31C-20-L2 Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
13125.00†	7164.14	-1267.10	-5339.24	13079.78	7166.36	-664.86	-5353.29	90.21	602.41	555.71	1.08	PASS	
13225.00†	7163.85	-1269.50	-5439.21	13179.78	7165.98	-667.19	-5453.26	90.20	602.47	564.87	1.07	PASS	
13325.00†	7163.56	-1271.89	-5539.18	13279.78	7165.60	-669.52	-5553.23	90.19	602.53	574.03	1.05	PASS	
13425.00†	7163.26	-1274.28	-5639.16	13379.78	7165.22	-671.85	-5653.20	90.19	602.59	583.19	1.03	PASS	
13525.00†	7162.97	-1276.67	-5739.13	13479.78	7164.84	-674.18	-5753.17	90.18	602.65	592.36	1.02	PASS	
13625.00†	7162.68	-1279.06	-5839.10	13579.78	7164.46	-676.51	-5853.15	90.17	602.71	601.53	1.00	PASS	
13725.00†	7162.39	-1281.45	-5939.07	13679.78	7164.09	-678.84	-5953.12	90.16	602.78	610.70	0.99	FAIL	
13825.00†	7162.10	-1283.84	-6039.04	13779.78	7163.71	-681.17	-6053.09	90.15	602.84	619.87	0.97	FAIL	
13925.00†	7161.81	-1286.23	-6139.01	13879.78	7163.33	-683.50	-6153.06	90.15	602.90	629.05	0.96	FAIL	
14025.00†	7161.51	-1288.62	-6238.98	13979.78	7162.95	-685.83	-6253.04	90.14	602.96	638.22	0.94	FAIL	
14032.94	7161.49	-1288.81	-6246.92	13987.72	7162.92	-686.02	-6260.97	90.14	602.96	638.95	0.94	FAIL	
14125.00†	7161.22	-1288.79	-6338.97	14079.78	7162.57	-688.16	-6352.97	90.14	600.80	647.41	0.93	FAIL	
14211.94	7160.97	-1284.71	-6425.81	14166.47	7162.24	-690.18	-6439.67	90.14	594.69	655.40	0.91	FAIL	
14225.00†	7160.93	-1283.79	-6438.83	14179.47	7162.19	-690.48	-6452.67	90.14	593.47	656.60	0.90	FAIL	
14325.00†	7160.64	-1276.82	-6538.59	14279.04	7161.82	-692.80	-6552.21	90.13	584.18	665.78	0.88	FAIL	
14411.94	7160.39	-1270.75	-6625.32	14365.60	7161.49	-694.82	-6638.74	90.13	576.09	673.77	0.85	FAIL	
14425.00†	7160.35	-1269.89	-6638.35	14378.61	7161.44	-695.12	-6651.75	90.12	574.92	674.97	0.85	FAIL	
14525.00†	7160.06	-1266.21	-6738.27	14478.42	7161.06	-697.45	-6751.53	90.11	568.92	684.16	0.83	FAIL	
14625.00†	7159.76	-1267.77	-6838.25	14578.40	7160.69	-699.78	-6851.49	90.09	568.14	693.36	0.82	FAIL	
14725.00†	7159.47	-1274.55	-6938.00	14678.29	7160.31	-702.10	-6951.35	90.07	572.60	702.51	0.81	FAIL	
14825.00†	7159.17	-1286.55	-7037.27	14777.81	7159.93	-704.42	-7050.84	90.05	582.29	711.58	0.82	FAIL	
14925.00†	7158.88	-1303.73	-7135.77	14876.68	7159.56	-706.73	-7149.69	90.04	597.16	720.52	0.83	FAIL	
14937.60	7158.84	-1306.26	-7148.12	14889.09	7159.51	-707.02	-7162.09	90.03	599.40	721.64	0.83	FAIL	
15025.00†	7158.59	-1324.09	-7233.68	14975.04	7159.18	-709.02	-7248.01	90.03	615.23	729.38	0.84	FAIL	
15037.60	7158.55	-1326.66	-7246.02	14987.43	7159.14	-709.31	-7260.41	90.02	617.52	730.49	0.85	FAIL	
15125.00†	7158.30	-1342.52	-7331.95	15073.72	7158.81	-711.32	-7346.66	90.02	631.37	738.29	0.86	FAIL	
15225.00†	7158.01	-1355.83	-7431.05	15173.10	7158.44	-713.63	-7446.02	90.02	642.37	747.33	0.86	FAIL	
15325.00†	7157.72	-1363.93	-7530.71	15272.92	7158.06	-715.96	-7545.81	90.03	648.15	756.47	0.86	FAIL	
15417.62	7157.45	-1366.77	-7623.28	15365.53	7157.71	-718.12	-7638.39	90.03	648.83	764.98	0.85	FAIL	
15425.00†	7157.43	-1366.82	-7630.66	15372.91	7157.68	-718.29	-7645.77	90.03	648.71	765.66	0.85	FAIL	
15525.00†	7157.14	-1367.46	-7730.65	15472.89	7157.30	-720.62	-7745.73	90.02	647.02	774.87	0.83	FAIL	
15625.00†	7156.85	-1368.11	-7830.65	15572.88	7156.92	-722.95	-7845.69	90.01	645.34	784.07	0.82	FAIL	
15725.00†	7156.56	-1368.75	-7930.65	15672.86	7156.54	-725.28	-7945.64	90.00	643.65	793.27	0.81	FAIL	
15825.00†	7156.27	-1369.40	-8030.65	15772.85	7156.17	-727.61	-8045.60	89.99	641.97	802.48	0.80	FAIL	
15925.00†	7155.98	-1370.04	-8130.64	15872.84	7155.79	-729.94	-8145.56	89.99	640.28	811.68	0.79	FAIL	
16025.00†	7155.70	-1370.69	-8230.64	15972.82	7155.41	-732.27	-8245.52	89.98	638.60	820.89	0.78	FAIL	
16125.00†	7155.41	-1371.33	-8330.64	16072.81	7155.03	-734.60	-8345.48	89.97	636.91	830.10	0.77	FAIL	
16225.00†	7155.12	-1371.98	-8430.64	16172.79	7154.65	-736.93	-8445.43	89.96	635.23	839.31	0.76	FAIL	
16325.00†	7154.83	-1372.62	-8530.63	16272.78	7154.27	-739.26	-8545.39	89.95	633.54	848.52	0.75	FAIL	
16425.00†	7154.54	-1373.27	-8630.63	16372.76	7153.90	-741.59	-8645.35	89.94	631.86	857.73	0.74	FAIL	
16525.00†	7154.25	-1373.91	-8730.63	16472.75	7153.52	-743.91	-8745.31	89.94	630.17	866.94	0.73	FAIL	
16625.00†	7153.97	-1374.56	-8830.63	16572.74	7153.14	-746.24	-8845.27	89.93	628.49	876.15	0.72	FAIL	
16725.00†	7153.68	-1375.20	-8930.62	16672.72	7152.76	-748.57	-8945.22	89.92	626.80	885.36	0.71	FAIL	
16825.00†	7153.39	-1375.85	-9030.62	16772.71	7152.38	-750.90	-9045.18	89.91	625.12	894.57	0.70	FAIL	
16925.00†	7153.10	-1376.49	-9130.62	16872.69	7152.00	-753.23	-9145.14	89.90	623.43	903.78	0.69	FAIL	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 55 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DONN 31C-20-L2 PWB Offset Wellpath: DONN 31C-20-L2 PWP (REV-A.0)

Facility: SEC.21-T06N-R66W Slot: SLOT#20 DONN 31C-20-L2 (878'FNL & 251'FEL, SEC.21) Well: DONN 31C-20-L2 Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
17025.00†	7152.81	-1377.14	-9230.62	16972.68	7151.63	-755.56	-9245.10	89.89	621.75	913.00	0.68	FAIL	
17125.00†	7152.52	-1377.78	-9330.61	17072.67	7151.25	-757.89	-9345.06	89.89	620.06	922.21	0.67	FAIL	
17225.00†	7152.24	-1378.43	-9430.61	17172.65	7150.87	-760.22	-9445.01	89.88	618.38	931.42	0.66	FAIL	
17325.00†	7151.95	-1379.07	-9530.61	17272.64	7150.49	-762.55	-9544.97	89.87	616.69	940.64	0.66	FAIL	
17425.00†	7151.66	-1379.72	-9630.61	17372.62	7150.11	-764.88	-9644.93	89.86	615.01	949.85	0.65	FAIL	
17525.00†	7151.37	-1380.36	-9730.60	17472.61	7149.73	-767.21	-9744.89	89.85	613.32	959.07	0.64	FAIL	
17625.00†	7151.08	-1381.01	-9830.60	17572.59	7149.36	-769.54	-9844.84	89.84	611.64	968.28	0.63	FAIL	
17725.00†	7150.79	-1381.65	-9930.60	17672.58	7148.98	-771.87	-9944.80	89.83	609.95	977.50	0.62	FAIL	
17825.00†	7150.51	-1382.30	-10030.60	17772.57	7148.60	-774.20	-10044.76	89.82	608.27	986.72	0.62	FAIL	
17925.00†	7150.22	-1382.94	-10130.59	17872.55	7148.22	-776.53	-10144.72	89.81	606.58	995.94	0.61	FAIL	
17996.92†	7150.01	-1383.41	-10202.51	17931.08	7148.00	-777.89	-10203.23	89.81	605.52	1001.69	0.60	FAIL	
18000.13	7150.00	-1383.43	-10205.72	17931.08	7148.00	-777.89	-10203.23	89.81	605.54	1001.35	0.60	FAIL	

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: DONN 31C-20-L2 PWB Offset Wellpath: DONN 31C-20-L2 PWP (REV-A.0)

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: DONN 31C-20-L2 PWB Offset Wellpath: DONN 31C-20-L2 PWP (REV-A.0)

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
13.5in Open Hole	25.00	1750.00	1725.00	24.00	1735.99	36.64	0.17	4.22	46.03
9.625in Casing Surface	25.00	1750.00	1725.00	24.00	1735.99	36.64	0.17	4.22	46.03
8.5in Open Hole	1750.00	17931.08	16181.08	1735.99	7148.00	4.22	46.03	-218.78	-3109.86

SURVEY PROGRAM - Offset Wellbore: DONN 31C-20-L2 PWB Offset Wellpath: DONN 31C-20-L2 PWP (REV-A.0)

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
25.00	1750.00	Custom BHI NaviTrak (Standard Rotating+Axial Corr) (Rockies 0.03Gt model)		DONN 31C-20-L2 PWB
1750.00	17931.08	Custom BHI AutoTrak Curve (IFR1, Short) (Rockies 0.03Gt model)		DONN 31C-20-L2 PWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: DONN 31C-20-L2 PWB Offset Wellpath: DONN 31C-20-L2 PWP (REV-A.0)

MD Reference: PRECISION DRILLING (25') (RKB)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	25.00ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 56 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. FRITZLER 12-21 AWB Offset Wellpath: EX. FRITZLER 12-21 AWP

Facility: SEC.21-T06N-66W Slot: SLOT#03 EX. FRITZLER 12-21 (1707'FNL & 543'FWL, PR NB/CD) Well: EX. FRITZLER 12-21 Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	-5.00	25.00	-851.00	-4511.13	-100.68	4590.70	25.57	186.56	PASS	
125.00†	125.00	0.00	0.00	95.00	125.00	-851.00	-4511.13	-100.68	4590.70	50.37	92.91	PASS	
225.00†	225.00	0.00	0.00	195.00	225.00	-851.00	-4511.13	-100.68	4590.70	51.27	91.23	PASS	
300.00	300.00	0.00	0.00	270.00	300.00	-851.00	-4511.13	-100.68	4590.70	52.48	89.03	PASS	
325.00†	325.00	-0.09	0.06	295.00	325.00	-851.00	-4511.13	115.52	4590.75	52.90	88.38	PASS	
425.00†	424.96	-2.20	1.61	394.96	424.96	-851.00	-4511.13	115.53	4591.88	55.13	84.76	PASS	
525.00†	524.77	-7.13	5.22	494.77	524.77	-851.00	-4511.13	115.55	4594.51	57.85	80.75	PASS	
625.00†	624.30	-14.86	10.88	594.30	624.30	-851.00	-4511.13	115.59	4598.66	60.93	76.67	PASS	
725.00†	723.44	-25.39	18.59	693.44	723.44	-851.00	-4511.13	115.63	4604.35	64.29	72.70	PASS	
825.00†	822.07	-38.71	28.34	792.07	822.07	-851.00	-4511.13	115.68	4611.57	67.84	68.94	PASS	
895.18	890.91	-49.71	36.39	860.91	890.91	-851.00	-4511.13	115.72	4617.58	70.43	66.46	PASS	
925.00†	920.09	-54.67	40.02	890.09	920.09	-851.00	-4511.13	115.79	4620.30	71.53	65.46	PASS	
1025.00†	1017.94	-71.32	52.20	987.94	1017.94	-851.00	-4511.13	116.02	4629.47	75.34	62.23	PASS	
1125.00†	1115.79	-87.96	64.39	1085.79	1115.79	-851.00	-4511.13	116.24	4638.71	79.26	59.24	PASS	
1225.00†	1213.64	-104.60	76.57	1183.64	1213.64	-851.00	-4511.13	116.46	4648.03	83.25	56.47	PASS	
1325.00†	1311.48	-121.25	88.76	1281.48	1311.48	-851.00	-4511.13	116.69	4657.42	87.32	53.92	PASS	
1425.00†	1409.33	-137.89	100.94	1379.33	1409.33	-851.00	-4511.13	116.91	4666.88	91.44	51.57	PASS	
1525.00†	1507.18	-154.53	113.12	1477.18	1507.18	-851.00	-4511.13	117.13	4676.41	95.61	49.40	PASS	
1625.00†	1605.03	-171.18	125.31	1575.03	1605.03	-851.00	-4511.13	117.35	4686.02	99.83	47.39	PASS	
1725.00†	1702.88	-187.82	137.49	1672.88	1702.88	-851.00	-4511.13	117.57	4695.69	104.07	45.53	PASS	
1825.00†	1800.73	-204.47	149.67	1770.73	1800.73	-851.00	-4511.13	117.79	4705.44	108.06	43.83	PASS	
1925.00†	1898.58	-221.11	161.86	1868.58	1898.58	-851.00	-4511.13	118.01	4715.25	112.30	42.25	PASS	
2025.00†	1996.43	-237.75	174.04	1966.43	1996.43	-851.00	-4511.13	118.23	4725.14	116.57	40.78	PASS	
2125.00†	2094.28	-254.40	186.22	2064.28	2094.28	-851.00	-4511.13	118.44	4735.09	120.87	39.40	PASS	
2225.00†	2192.13	-271.04	198.41	2162.13	2192.13	-851.00	-4511.13	118.66	4745.12	125.20	38.11	PASS	
2325.00†	2289.98	-287.68	210.59	2259.98	2289.98	-851.00	-4511.13	118.87	4755.21	129.56	36.90	PASS	
2425.00†	2387.83	-304.33	222.77	2357.83	2387.83	-851.00	-4511.13	119.09	4765.37	133.94	35.76	PASS	
2525.00†	2485.68	-320.97	234.96	2455.68	2485.68	-851.00	-4511.13	119.30	4775.60	138.34	34.69	PASS	
2625.00†	2583.53	-337.62	247.14	2553.53	2583.53	-851.00	-4511.13	119.51	4785.89	142.76	33.69	PASS	
2725.00†	2681.38	-354.26	259.33	2651.38	2681.38	-851.00	-4511.13	119.72	4796.25	147.20	32.74	PASS	
2825.00†	2779.23	-370.90	271.51	2749.23	2779.23	-851.00	-4511.13	119.93	4806.68	151.66	31.84	PASS	
2925.00†	2877.08	-387.55	283.69	2847.08	2877.08	-851.00	-4511.13	120.14	4817.17	156.14	30.99	PASS	
3025.00†	2974.93	-404.19	295.88	2944.93	2974.93	-851.00	-4511.13	120.35	4827.73	160.63	30.18	PASS	
3125.00†	3072.78	-420.83	308.06	3042.78	3072.78	-851.00	-4511.13	120.56	4838.35	165.14	29.42	PASS	
3225.00†	3170.63	-437.48	320.24	3140.63	3170.63	-851.00	-4511.13	120.76	4849.04	169.67	28.69	PASS	
3325.00†	3268.48	-454.12	332.43	3238.48	3268.48	-851.00	-4511.13	120.97	4859.79	174.21	28.01	PASS	
3425.00†	3366.33	-470.77	344.61	3336.33	3366.33	-851.00	-4511.13	121.17	4870.61	178.77	27.35	PASS	
3525.00†	3464.18	-487.41	356.79	3434.18	3464.18	-851.00	-4511.13	121.38	4881.49	183.34	26.72	PASS	
3625.00†	3562.03	-504.05	368.98	3532.03	3562.03	-851.00	-4511.13	121.58	4892.43	187.93	26.13	PASS	
3725.00†	3659.88	-520.70	381.16	3629.88	3659.88	-851.00	-4511.13	121.78	4903.43	192.52	25.56	PASS	
3825.00†	3757.73	-537.34	393.34	3727.73	3757.73	-851.00	-4511.13	121.98	4914.50	197.13	25.02	PASS	
3925.00†	3855.57	-553.98	405.53	3825.57	3855.57	-851.00	-4511.13	122.18	4925.63	201.75	24.50	PASS	
4025.00†	3953.42	-570.63	417.71	3923.42	3953.42	-851.00	-4511.13	122.38	4936.81	206.39	24.00	PASS	
4125.00†	4051.27	-587.27	429.90	4021.27	4051.27	-851.00	-4511.13	122.58	4948.06	211.03	23.52	PASS	
4225.00†	4149.12	-603.92	442.08	4119.12	4149.12	-851.00	-4511.13	122.78	4959.37	215.68	23.07	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 57 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. FRITZLER 12-21 AWB Offset Wellpath: EX. FRITZLER 12-21 AWP

Facility: SEC.21-T06N-66W		Slot: SLOT#03 EX. FRITZLER 12-21		(1707'FNL & 543'FWL, PR NB/CD)		Well: EX. FRITZLER 12-21		Threshold Value=1.00		† = interpolated/extrapolated station		
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status
4325.00†	4246.97	-620.56	454.26	4216.97	4246.97	-851.00	-4511.13	122.98	4970.74	220.35	22.63	PASS
4425.00†	4344.82	-637.20	466.45	4314.82	4344.82	-851.00	-4511.13	123.17	4982.17	225.02	22.21	PASS
4525.00†	4442.67	-653.85	478.63	4412.67	4442.67	-851.00	-4511.13	123.37	4993.66	229.71	21.80	PASS
4625.00†	4540.52	-670.49	490.81	4510.52	4540.52	-851.00	-4511.13	123.56	5005.20	234.40	21.42	PASS
4725.00†	4638.37	-687.13	503.00	4608.37	4638.37	-851.00	-4511.13	123.76	5016.81	239.10	21.04	PASS
4825.00†	4736.22	-703.78	515.18	4706.22	4736.22	-851.00	-4511.13	123.95	5028.47	243.81	20.68	PASS
4925.00†	4834.07	-720.42	527.36	4804.07	4834.07	-851.00	-4511.13	124.14	5040.19	248.53	20.34	PASS
5025.00†	4931.92	-737.07	539.55	4901.92	4931.92	-851.00	-4511.13	124.33	5051.97	253.25	20.00	PASS
5125.00†	5029.77	-753.71	551.73	4999.77	5029.77	-851.00	-4511.13	124.52	5063.80	257.99	19.68	PASS
5225.00†	5127.62	-770.35	563.91	5097.62	5127.62	-851.00	-4511.13	124.71	5075.69	262.73	19.37	PASS
5325.00†	5225.47	-787.00	576.10	5195.47	5225.47	-851.00	-4511.13	124.90	5087.64	267.47	19.07	PASS
5425.00†	5323.32	-803.64	588.28	5293.32	5323.32	-851.00	-4511.13	125.09	5099.64	272.23	18.78	PASS
5525.00†	5421.17	-820.28	600.47	5391.17	5421.17	-851.00	-4511.13	125.27	5111.69	276.99	18.50	PASS
5625.00†	5519.02	-836.93	612.65	5489.02	5519.02	-851.00	-4511.13	125.46	5123.80	281.75	18.23	PASS
5725.00†	5616.87	-853.57	624.83	5586.87	5616.87	-851.00	-4511.13	125.64	5135.97	286.52	17.97	PASS
5825.00†	5714.72	-870.22	637.02	5684.72	5714.72	-851.00	-4511.13	125.83	5148.19	291.30	17.71	PASS
5925.00†	5812.57	-886.86	649.20	5782.57	5812.57	-851.00	-4511.13	126.01	5160.46	296.08	17.47	PASS
6025.00†	5910.42	-903.50	661.38	5880.42	5910.42	-851.00	-4511.13	126.19	5172.78	300.87	17.23	PASS
6125.00†	6008.27	-920.15	673.57	5978.27	6008.27	-851.00	-4511.13	126.37	5185.16	305.67	17.00	PASS
6225.00†	6106.12	-936.79	685.75	6076.12	6106.12	-851.00	-4511.13	126.55	5197.59	310.46	16.78	PASS
6325.00†	6203.97	-953.43	697.93	6173.97	6203.97	-851.00	-4511.13	126.73	5210.08	315.27	16.56	PASS
6425.00†	6301.82	-970.08	710.12	6271.82	6301.82	-851.00	-4511.13	126.91	5222.61	320.08	16.35	PASS
6525.00†	6399.66	-986.72	722.30	6369.66	6399.66	-851.00	-4511.13	127.09	5235.20	324.89	16.15	PASS
6605.93	6478.85	-1000.19	732.16	6448.85	6478.85	-851.00	-4511.13	127.23	5245.42	328.79	15.99	PASS
6625.00†	6497.54	-1003.38	734.20	6467.54	6497.54	-851.00	-4511.13	119.97	5247.55	329.70	15.95	PASS
6725.00†	6595.97	-1020.39	735.57	6565.97	6595.97	-851.00	-4511.13	71.48	5249.44	334.69	15.72	PASS
6825.00†	6693.34	-1037.59	721.30	6663.34	6693.34	-851.00	-4511.13	41.14	5235.76	340.11	15.42	PASS
6925.00†	6787.24	-1054.57	691.74	6757.24	6787.24	-851.00	-4511.13	28.69	5206.85	345.42	15.10	PASS
7025.00†	6875.37	-1070.91	647.62	6845.37	6875.37	-851.00	-4511.13	22.98	5163.44	350.22	14.77	PASS
7125.00†	6955.55	-1086.20	590.03	6925.55	6955.55	-851.00	-4511.13	20.22	5106.58	354.47	14.43	PASS
7225.00†	7025.81	-1100.06	520.38	6995.81	7025.81	-851.00	-4511.13	19.17	5037.68	358.10	14.09	PASS
7325.00†	7084.42	-1112.16	440.40	7054.42	7084.42	-851.00	-4511.13	19.54	4958.42	361.06	13.76	PASS
7425.00†	7129.94	-1122.20	352.04	7099.94	7129.94	-851.00	-4511.13	21.73	4870.74	363.32	13.43	PASS
7525.00†	7161.25	-1129.93	257.49	7131.25	7161.25	-851.00	-4511.13	27.81	4776.78	364.84	13.12	PASS
7625.00†	7177.57	-1135.16	159.08	7147.57	7177.57	-851.00	-4511.13	49.25	4678.85	365.62	12.82	PASS
7682.94	7180.00	-1136.99	101.24	7150.00	7180.00	-851.00	-4511.13	91.94	4621.23	365.75	12.66	PASS
7725.00†	7179.88	-1138.00	59.19	7149.88	7179.88	-851.00	-4511.13	91.92	4579.33	365.76	12.54	PASS
7825.00†	7179.59	-1140.39	-40.78	7149.59	7179.59	-851.00	-4511.13	91.88	4479.71	365.77	12.27	PASS
7925.00†	7179.29	-1142.78	-140.75	7149.29	7179.29	-851.00	-4511.13	91.84	4380.11	365.80	12.00	PASS
8025.00†	7179.00	-1145.17	-240.72	7149.00	7179.00	-851.00	-4511.13	91.80	4280.53	365.83	11.72	PASS
8125.00†	7178.71	-1147.56	-340.69	7148.71	7178.71	-851.00	-4511.13	91.75	4180.97	365.87	11.45	PASS
8225.00†	7178.42	-1149.95	-440.66	7148.42	7178.42	-851.00	-4511.13	91.71	4081.43	365.92	11.17	PASS
8325.00†	7178.13	-1152.34	-540.63	7148.13	7178.13	-851.00	-4511.13	91.67	3981.92	365.98	10.90	PASS
8425.00†	7177.84	-1154.73	-640.61	7147.84	7177.84	-851.00	-4511.13	91.63	3882.43	366.06	10.62	PASS
8525.00†	7177.55	-1157.12	-740.58	7147.55	7177.55	-851.00	-4511.13	91.59	3782.96	366.15	10.35	PASS

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 58 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. FRITZLER 12-21 AWB Offset Wellpath: EX. FRITZLER 12-21 AWP

Facility: SEC.21-T06N-66W Slot: SLOT#03 EX. FRITZLER 12-21 (1707'FNL & 543'FWL, PR NB/CD) Well: EX. FRITZLER 12-21 Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
8625.00†	7177.25	-1159.52	-840.55	7147.25	7177.25	-851.00	-4511.13	91.54	3683.53	366.26	10.07	PASS	
8725.00†	7176.96	-1161.91	-940.52	7146.96	7176.96	-851.00	-4511.13	91.50	3584.13	366.38	9.80	PASS	
8825.00†	7176.67	-1164.30	-1040.49	7146.67	7176.67	-851.00	-4511.13	91.46	3484.76	366.52	9.52	PASS	
8925.00†	7176.38	-1166.69	-1140.46	7146.38	7176.38	-851.00	-4511.13	91.42	3385.43	366.69	9.25	PASS	
9025.00†	7176.09	-1169.08	-1240.43	7146.09	7176.09	-851.00	-4511.13	91.38	3286.13	366.88	8.97	PASS	
9125.00†	7175.80	-1171.47	-1340.40	7145.80	7175.80	-851.00	-4511.13	91.33	3186.89	367.10	8.70	PASS	
9225.00†	7175.51	-1173.86	-1440.37	7145.51	7175.51	-851.00	-4511.13	91.29	3087.69	367.35	8.42	PASS	
9325.00†	7175.21	-1176.25	-1540.34	7145.21	7175.21	-851.00	-4511.13	91.25	2988.54	367.64	8.14	PASS	
9425.00†	7174.92	-1178.64	-1640.32	7144.92	7174.92	-851.00	-4511.13	91.21	2889.46	367.97	7.87	PASS	
9525.00†	7174.63	-1181.03	-1740.29	7144.63	7174.63	-851.00	-4511.13	91.16	2790.43	368.35	7.59	PASS	
9625.00†	7174.34	-1183.42	-1840.26	7144.34	7174.34	-851.00	-4511.13	91.12	2691.49	368.79	7.31	PASS	
9725.00†	7174.05	-1185.82	-1940.23	7144.05	7174.05	-851.00	-4511.13	91.08	2592.62	369.29	7.03	PASS	
9825.00†	7173.76	-1188.21	-2040.20	7143.76	7173.76	-851.00	-4511.13	91.04	2493.84	369.87	6.75	PASS	
9925.00†	7173.47	-1190.60	-2140.17	7143.47	7173.47	-851.00	-4511.13	91.00	2395.16	370.54	6.47	PASS	
10025.00†	7173.17	-1192.99	-2240.14	7143.17	7173.17	-851.00	-4511.13	90.95	2296.60	371.30	6.20	PASS	
10125.00†	7172.88	-1195.38	-2340.11	7142.88	7172.88	-851.00	-4511.13	90.91	2198.17	372.19	5.92	PASS	
10225.00†	7172.59	-1197.77	-2440.08	7142.59	7172.59	-851.00	-4511.13	90.87	2099.88	373.21	5.64	PASS	
10325.00†	7172.30	-1200.16	-2540.05	7142.30	7172.30	-851.00	-4511.13	90.83	2001.77	374.40	5.35	PASS	
10425.00†	7172.01	-1202.55	-2640.03	7142.01	7172.01	-851.00	-4511.13	90.79	1903.85	375.78	5.07	PASS	
10525.00†	7171.72	-1204.94	-2740.00	7141.72	7171.72	-851.00	-4511.13	90.74	1806.16	377.39	4.79	PASS	
10625.00†	7171.42	-1207.33	-2839.97	7141.42	7171.42	-851.00	-4511.13	90.70	1708.74	379.28	4.51	PASS	
10725.00†	7171.13	-1209.72	-2939.94	7141.13	7171.13	-851.00	-4511.13	90.66	1611.63	381.49	4.23	PASS	
10825.00†	7170.84	-1212.11	-3039.91	7140.84	7170.84	-851.00	-4511.13	90.62	1514.90	384.10	3.95	PASS	
10925.00†	7170.55	-1214.51	-3139.88	7140.55	7170.55	-851.00	-4511.13	90.57	1418.62	387.19	3.67	PASS	
11025.00†	7170.26	-1216.90	-3239.85	7140.26	7170.26	-851.00	-4511.13	90.53	1322.89	390.86	3.39	PASS	
11125.00†	7169.97	-1219.29	-3339.82	7139.97	7169.97	-851.00	-4511.13	90.49	1227.85	395.25	3.11	PASS	
11225.00†	7169.68	-1221.68	-3439.79	7139.68	7169.68	-851.00	-4511.13	90.45	1133.66	400.52	2.83	PASS	
11325.00†	7169.38	-1224.07	-3539.76	7139.38	7169.38	-851.00	-4511.13	90.41	1040.55	406.90	2.56	PASS	
11425.00†	7169.09	-1226.46	-3639.74	7139.09	7169.09	-851.00	-4511.13	90.36	948.85	414.65	2.29	PASS	
11525.00†	7168.80	-1228.85	-3739.71	7138.80	7168.80	-851.00	-4511.13	90.32	859.00	424.15	2.03	PASS	
11625.00†	7168.51	-1231.24	-3839.68	7138.51	7168.51	-851.00	-4511.13	90.28	771.65	435.83	1.77	PASS	
11725.00†	7168.22	-1233.63	-3939.65	7138.22	7168.22	-851.00	-4511.13	90.24	687.76	450.22	1.53	PASS	
11825.00†	7167.93	-1236.02	-4039.62	7137.93	7167.93	-851.00	-4511.13	90.20	608.75	467.86	1.30	PASS	
11925.00†	7167.64	-1238.41	-4139.59	7137.64	7167.64	-851.00	-4511.13	90.15	536.78	489.01	1.10	PASS	
12025.00†	7167.34	-1240.81	-4239.56	7137.34	7167.34	-851.00	-4511.13	90.11	475.08	513.00	0.93	FAIL	
12125.00†	7167.05	-1243.20	-4339.53	7137.05	7167.05	-851.00	-4511.13	90.07	428.10	537.07	0.80	FAIL	
12225.00†	7166.76	-1245.59	-4439.50	7136.76	7166.76	-851.00	-4511.13	90.03	401.04	555.42	0.72	FAIL	
12287.50†	7166.58	-1247.08	-4501.99	7137.50	7167.50	-851.00	-4511.13	90.13	396.19	561.01	0.71	FAIL	
12296.00†	7166.55	-1247.28	-4510.48	7136.55	7166.55	-851.00	-4511.13	90.00	396.29	561.29	0.71	FAIL	
12325.00†	7166.47	-1247.98	-4539.47	7136.47	7166.47	-851.00	-4511.13	89.98	397.99	561.58	0.71	FAIL	
12425.00†	7166.18	-1250.37	-4639.45	7136.18	7166.18	-851.00	-4511.13	89.94	419.48	553.91	0.76	FAIL	
12525.00†	7165.89	-1252.76	-4739.42	7135.89	7165.89	-851.00	-4511.13	89.90	462.09	537.09	0.86	FAIL	
12625.00†	7165.60	-1255.15	-4839.39	7135.60	7165.60	-851.00	-4511.13	89.86	520.66	517.28	1.01	PASS	
12725.00†	7165.30	-1257.54	-4939.36	7135.30	7165.30	-851.00	-4511.13	89.82	590.47	498.34	1.19	PASS	
12825.00†	7165.01	-1259.93	-5039.33	7135.01	7165.01	-851.00	-4511.13	89.77	668.00	481.78	1.39	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 59 of 202

**BAKER
HUGHES**
a GE company



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. FRITZLER 12-21 AWB Offset Wellpath: EX. FRITZLER 12-21 AWP

Facility: SEC.21-T06N-66W Slot: SLOT#03 EX. FRITZLER 12-21 (1707'FNL & 543'FWL, PR NB/CD) Well: EX. FRITZLER 12-21 Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
12925.00†	7164.72	-1262.32	-5139.30	7134.72	7164.72	-851.00	-4511.13	89.73	750.85	467.83	1.61	PASS	
13025.00†	7164.43	-1264.71	-5239.27	7134.43	7164.43	-851.00	-4511.13	89.69	837.46	456.21	1.84	PASS	
13125.00†	7164.14	-1267.10	-5339.24	7134.14	7164.14	-851.00	-4511.13	89.65	926.77	446.56	2.08	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: EX. FRITZLER 12-21 AWB Offset Wellpath: EX. FRITZLER 12-21 AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

WELLPATH COMPOSITION - Offset Wellbore: EX. FRITZLER 12-21 AWB Offset Wellpath: EX. FRITZLER 12-21 AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
0.00	7298.00	Drift Indicator - Inclination Only (Actual Survey)	ASSUMED VERTICAL TO TD FROM COGCC <7298>	EX. FRITZLER 12-21 AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: EX. FRITZLER 12-21 AWB Offset Wellpath: EX. FRITZLER 12-21 AWP

MD Reference: Rig on SLOT#03 EX. FRITZLER 12-21 (1707'FNL & 543'FWL, PR NB/CD) (RT)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	0.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 60 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DONN 31N-20C-L PWB Offset Wellpath: DONN 31N-20C-L PWP (REV-B.0)

Facility: SEC.21-T06N-R66W Slot: SLOT#19 DONN 31N-20C-L (858'FNL & 251'FEL, SEC.21) Well: DONN 31N-20C-L Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	26.00	25.00	80.15	0.56	0.40	80.15	1.57	131.62	PASS	
125.00†	125.00	0.00	0.00	126.00	125.00	80.15	0.56	0.40	80.15	1.89	85.61	PASS	
225.00†	225.00	0.00	0.00	226.32	225.32	80.10	0.66	0.48	80.10	2.45	53.08	PASS	
300.00	300.00	0.00	0.00	302.20	301.17	79.35	2.19	1.58	79.39	2.96	39.34	PASS	
325.00†	325.00	-0.09	0.06	327.47	326.42	78.90	3.10	-141.60	79.06	3.12	36.14	PASS	
401.02†	401.00	-1.44	1.05	404.44	403.26	76.95	7.11	-139.40	78.65	3.83	27.14	PASS	
425.00†	424.96	-2.20	1.61	428.44	427.20	76.15	8.73	-138.62	78.71	4.03	25.32	PASS	
525.00†	524.77	-7.13	5.22	529.22	527.50	71.85	17.53	-134.95	79.98	5.07	19.24	PASS	
625.00†	624.30	-14.86	10.88	629.49	626.92	66.16	29.18	-131.04	83.10	5.91	16.60	PASS	
725.00†	723.44	-25.39	18.59	729.28	725.79	60.22	41.33	-128.79	88.61	6.76	15.11	PASS	
825.00†	822.07	-38.71	28.34	828.97	824.57	54.28	53.46	-128.42	96.36	7.68	14.20	PASS	
895.18	890.91	-49.71	36.39	898.81	893.76	50.12	61.97	-129.07	103.10	8.33	13.86	PASS	
925.00†	920.09	-54.67	40.02	928.46	923.14	48.36	65.58	-129.52	106.20	8.59	13.80	PASS	
1025.00†	1017.94	-71.32	52.20	1027.88	1021.64	42.44	77.68	-130.84	116.63	9.40	13.70	PASS	
1125.00†	1115.79	-87.96	64.39	1127.30	1120.14	36.52	89.79	-131.95	127.12	10.22	13.62	PASS	
1225.00†	1213.64	-104.60	76.57	1226.73	1218.65	30.60	101.89	-132.89	137.65	11.06	13.54	PASS	
1325.00†	1311.48	-121.25	88.76	1326.15	1317.15	24.69	114.00	-133.69	148.21	11.89	13.48	PASS	
1425.00†	1409.33	-137.89	100.94	1425.57	1415.65	18.77	126.10	-134.39	158.79	12.72	13.42	PASS	
1525.00†	1507.18	-154.53	113.12	1524.99	1514.16	12.85	138.21	-135.00	169.40	13.56	13.37	PASS	
1625.00†	1605.03	-171.18	125.31	1624.41	1612.66	6.93	150.31	-135.54	180.02	14.40	13.33	PASS	
1725.00†	1702.88	-187.82	137.49	1723.83	1711.17	1.01	162.42	-136.01	190.65	15.24	13.28	PASS	
1825.00†	1800.73	-204.47	149.67	1823.25	1809.67	-4.91	174.52	-136.44	201.30	15.46	13.60	PASS	
1925.00†	1898.58	-221.11	161.86	1922.67	1908.17	-10.82	186.62	-136.83	211.96	15.60	14.18	PASS	
2025.00†	1996.43	-237.75	174.04	2022.09	2006.68	-16.74	198.73	-137.17	222.62	15.83	14.68	PASS	
2125.00†	2094.28	-254.40	186.22	2121.51	2105.18	-22.66	210.83	-137.49	233.29	16.13	15.08	PASS	
2225.00†	2192.13	-271.04	198.41	2220.94	2203.68	-28.58	222.94	-137.78	243.97	16.51	15.40	PASS	
2325.00†	2289.98	-287.68	210.59	2320.36	2302.19	-34.50	235.04	-138.04	254.66	16.95	15.63	PASS	
2425.00†	2387.83	-304.33	222.77	2419.78	2400.69	-40.42	247.15	-138.29	265.35	17.46	15.80	PASS	
2525.00†	2485.68	-320.97	234.96	2519.20	2499.20	-46.33	259.25	-138.51	276.04	18.03	15.90	PASS	
2625.00†	2583.53	-337.62	247.14	2618.62	2597.70	-52.25	271.36	-138.72	286.74	18.65	15.95	PASS	
2725.00†	2681.38	-354.26	259.33	2718.04	2696.20	-58.17	283.46	-138.91	297.44	19.31	15.95	PASS	
2825.00†	2779.23	-370.90	271.51	2817.46	2794.71	-64.09	295.57	-139.09	308.14	20.02	15.92	PASS	
2925.00†	2877.08	-387.55	283.69	2916.88	2893.21	-70.01	307.67	-139.26	318.85	20.76	15.86	PASS	
3025.00†	2974.93	-404.19	295.88	3016.30	2991.71	-75.93	319.78	-139.41	329.56	21.54	15.78	PASS	
3125.00†	3072.78	-420.83	308.06	3115.72	3090.22	-81.84	331.88	-139.56	340.27	22.35	15.69	PASS	
3225.00†	3170.63	-437.48	320.24	3215.15	3188.72	-87.76	343.99	-139.70	350.99	23.19	15.58	PASS	
3325.00†	3268.48	-454.12	332.43	3314.57	3287.23	-93.68	356.09	-139.82	361.70	24.05	15.47	PASS	
3425.00†	3366.33	-470.77	344.61	3413.99	3385.73	-99.60	368.20	-139.95	372.42	24.93	15.35	PASS	
3525.00†	3464.18	-487.41	356.79	3513.41	3484.23	-105.52	380.30	-140.06	383.14	25.83	15.22	PASS	
3625.00†	3562.03	-504.05	368.98	3612.83	3582.74	-111.44	392.41	-140.17	393.86	26.75	15.10	PASS	
3725.00†	3659.88	-520.70	381.16	3712.25	3681.24	-117.35	404.51	-140.27	404.58	27.68	14.97	PASS	
3825.00†	3757.73	-537.34	393.34	3811.67	3779.74	-123.27	416.62	-140.37	415.31	28.63	14.85	PASS	
3925.00†	3855.57	-553.98	405.53	3911.09	3878.25	-129.19	428.72	-140.46	426.03	29.59	14.73	PASS	
4025.00†	3953.42	-570.63	417.71	4010.51	3976.75	-135.11	440.82	-140.55	436.75	30.56	14.61	PASS	
4125.00†	4051.27	-587.27	429.90	4109.93	4075.25	-141.03	452.93	-140.64	447.48	31.54	14.49	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 61 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DONN 31N-20C-L PWB Offset Wellpath: DONN 31N-20C-L PWP (REV-B.0)

Facility: SEC.21-T06N-R66W				Slot: SLOT#19 DONN 31N-20C-L (858'FNL & 251'FEL, SEC.21)		Well: DONN 31N-20C-L		Threshold Value=1.00 † = Interpolated/extrapolated station				
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status
4225.00†	4149.12	-603.92	442.08	4209.36	4173.76	-146.95	465.03	-140.72	458.21	32.54	14.37	PASS
4325.00†	4246.97	-620.56	454.26	4308.78	4272.26	-152.86	477.14	-140.79	468.94	33.54	14.26	PASS
4425.00†	4344.82	-637.20	466.45	4408.20	4370.77	-158.78	489.24	-140.87	479.67	34.54	14.16	PASS
4525.00†	4442.67	-653.85	478.63	4507.62	4469.27	-164.70	501.35	-140.94	490.39	35.56	14.05	PASS
4625.00†	4540.52	-670.49	490.81	4607.04	4567.77	-170.62	513.45	-141.00	501.13	36.58	13.95	PASS
4725.00†	4638.37	-687.13	503.00	4706.46	4666.28	-176.54	525.56	-141.07	511.86	37.61	13.85	PASS
4825.00†	4736.22	-703.78	515.18	4805.88	4764.78	-182.46	537.66	-141.13	522.59	38.64	13.76	PASS
4925.00†	4834.07	-720.42	527.36	4905.30	4863.28	-188.37	549.77	-141.19	533.32	39.68	13.67	PASS
5025.00†	4931.92	-737.07	539.55	5004.72	4961.79	-194.29	561.87	-141.24	544.05	40.72	13.58	PASS
5125.00†	5029.77	-753.71	551.73	5104.14	5060.29	-200.21	573.98	-141.30	554.79	41.77	13.49	PASS
5225.00†	5127.62	-770.35	563.91	5203.56	5158.80	-206.13	586.08	-141.35	565.52	42.82	13.41	PASS
5325.00†	5225.47	-787.00	576.10	5302.99	5257.30	-212.05	598.19	-141.40	576.25	43.88	13.33	PASS
5425.00†	5323.32	-803.64	588.28	5402.41	5355.80	-217.97	610.29	-141.45	586.99	44.94	13.26	PASS
5525.00†	5421.17	-820.28	600.47	5501.83	5454.31	-223.88	622.40	-141.50	597.72	46.00	13.18	PASS
5625.00†	5519.02	-836.93	612.65	5601.25	5552.81	-229.80	634.50	-141.54	608.46	47.06	13.11	PASS
5725.00†	5616.87	-853.57	624.83	5700.67	5651.31	-235.72	646.61	-141.59	619.19	48.13	13.04	PASS
5825.00†	5714.72	-870.22	637.02	5800.09	5749.82	-241.64	658.71	-141.63	629.93	49.20	12.98	PASS
5925.00†	5812.57	-886.86	649.20	5899.51	5848.32	-247.56	670.82	-141.67	640.66	50.27	12.91	PASS
6025.00†	5910.42	-903.50	661.38	5998.93	5946.83	-253.48	682.92	-141.71	651.40	51.35	12.85	PASS
6125.00†	6008.27	-920.15	673.57	6098.35	6045.33	-259.40	695.03	-141.75	662.14	52.42	12.79	PASS
6225.00†	6106.12	-936.79	685.75	6197.77	6143.83	-265.31	707.13	-141.78	672.88	53.50	12.73	PASS
6325.00†	6203.97	-953.43	697.93	6297.20	6242.34	-271.23	719.23	-141.82	683.61	54.59	12.68	PASS
6425.00†	6301.82	-970.08	710.12	6396.62	6340.84	-277.15	731.34	-141.85	694.35	55.67	12.62	PASS
6525.00†	6399.66	-986.72	722.30	6499.70	6443.25	-283.38	743.45	-142.15	704.93	56.81	12.55	PASS
6605.93	6478.85	-1000.19	732.16	6582.87	6526.11	-288.69	736.97	-143.29	713.08	57.48	12.55	PASS
6625.00†	6497.54	-1003.38	734.20	6601.93	6544.98	-289.94	734.61	-151.10	715.01	58.08	12.45	PASS
6725.00†	6595.97	-1020.39	735.57	6699.76	6640.22	-296.45	713.63	157.50	725.62	59.69	12.29	PASS
6825.00†	6693.34	-1037.59	721.30	6794.43	6728.26	-302.81	679.65	124.26	736.79	60.86	12.24	PASS
6925.00†	6787.24	-1054.57	691.74	6886.37	6808.02	-308.92	634.48	108.96	748.13	62.11	12.17	PASS
7025.00†	6875.37	-1070.91	647.62	6976.00	6878.72	-314.69	579.82	100.44	759.26	60.60	12.66	PASS
7125.00†	6955.55	-1086.20	590.03	7063.68	6939.79	-320.04	517.24	94.89	769.77	65.18	11.93	PASS
7225.00†	7025.81	-1100.06	520.38	7149.75	6990.83	-324.91	448.18	90.96	779.29	67.33	11.69	PASS
7325.00†	7084.42	-1112.16	440.40	7234.52	7031.56	-329.26	374.04	88.10	787.49	70.05	11.35	PASS
7425.00†	7129.94	-1122.20	352.04	7318.26	7061.78	-333.03	296.10	86.03	794.08	73.58	10.89	PASS
7525.00†	7161.25	-1129.93	257.49	7401.21	7081.39	-336.20	215.62	84.62	798.83	77.54	10.39	PASS
7625.00†	7177.57	-1135.16	159.08	7483.60	7090.37	-338.73	133.82	83.82	801.59	81.93	9.86	PASS
7682.94	7180.00	-1136.99	101.24	7534.51	7090.89	-339.98	82.94	83.62	802.18	84.71	9.54	PASS
7725.00†	7179.88	-1138.00	59.19	7576.56	7090.64	-340.98	40.89	83.61	802.21	86.98	9.29	PASS
7825.00†	7179.59	-1140.39	-40.78	7676.56	7090.05	-343.34	-59.08	83.59	802.27	92.75	8.71	PASS
7925.00†	7179.29	-1142.78	-140.75	7776.56	7089.46	-345.70	-159.05	83.57	802.34	99.05	8.15	PASS
8025.00†	7179.00	-1145.17	-240.72	7876.56	7088.87	-348.06	-259.02	83.55	802.40	105.77	7.63	PASS
8125.00†	7178.71	-1147.56	-340.69	7976.56	7088.27	-350.42	-358.99	83.53	802.46	112.84	7.15	PASS
8225.00†	7178.42	-1149.95	-440.66	8076.56	7087.68	-352.78	-458.95	83.51	802.53	120.19	6.71	PASS
8325.00†	7178.13	-1152.34	-540.63	8176.56	7087.09	-355.14	-558.92	83.49	802.59	127.79	6.31	PASS
8425.00†	7177.84	-1154.73	-640.61	8276.56	7086.50	-357.50	-658.89	83.47	802.65	135.58	5.95	PASS

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 62 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DONN 31N-20C-L PWB Offset Wellpath: DONN 31N-20C-L PWP (REV-B.0)

Facility: SEC.21-T06N-R66W Slot: SLOT#19 DONN 31N-20C-L (858'FNL & 251'FEL, SEC.21) Well: DONN 31N-20C-L Threshold Value=1.00 † = Interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
8525.00†	7177.55	-1157.12	-740.58	8376.56	7085.91	-359.87	-758.86	83.45	802.72	143.53	5.62	PASS	
8625.00†	7177.25	-1159.52	-840.55	8476.56	7085.32	-362.23	-858.83	83.42	802.78	151.62	5.31	PASS	
8725.00†	7176.96	-1161.91	-940.52	8576.56	7084.72	-364.59	-958.80	83.40	802.85	159.83	5.04	PASS	
8825.00†	7176.67	-1164.30	-1040.49	8676.56	7084.13	-366.95	-1058.77	83.38	802.91	168.14	4.79	PASS	
8925.00†	7176.38	-1166.69	-1140.46	8776.56	7083.54	-369.31	-1158.74	83.36	802.97	176.54	4.56	PASS	
9025.00†	7176.09	-1169.08	-1240.43	8876.56	7082.95	-371.67	-1258.71	83.34	803.04	185.00	4.35	PASS	
9125.00†	7175.80	-1171.47	-1340.40	8976.56	7082.36	-374.03	-1358.68	83.32	803.10	193.54	4.16	PASS	
9225.00†	7175.51	-1173.86	-1440.37	9076.56	7081.77	-376.39	-1458.65	83.30	803.17	202.12	3.98	PASS	
9325.00†	7175.21	-1176.25	-1540.34	9176.56	7081.17	-378.75	-1558.62	83.28	803.23	210.76	3.82	PASS	
9425.00†	7174.92	-1178.64	-1640.32	9276.56	7080.58	-381.12	-1658.59	83.26	803.30	219.44	3.67	PASS	
9525.00†	7174.63	-1181.03	-1740.29	9376.56	7079.99	-383.48	-1758.56	83.23	803.36	228.15	3.53	PASS	
9625.00†	7174.34	-1183.42	-1840.26	9476.56	7079.40	-385.84	-1858.53	83.21	803.43	236.90	3.40	PASS	
9725.00†	7174.05	-1185.82	-1940.23	9576.56	7078.81	-388.20	-1958.50	83.19	803.49	245.68	3.28	PASS	
9825.00†	7173.76	-1188.21	-2040.20	9676.55	7078.22	-390.56	-2058.47	83.17	803.56	254.49	3.16	PASS	
9925.00†	7173.47	-1190.60	-2140.17	9776.55	7077.62	-392.92	-2158.44	83.15	803.62	263.32	3.06	PASS	
10025.00†	7173.17	-1192.99	-2240.14	9876.55	7077.03	-395.28	-2258.41	83.13	803.69	272.17	2.96	PASS	
10125.00†	7172.88	-1195.38	-2340.11	9976.55	7076.44	-397.64	-2358.38	83.11	803.75	281.05	2.86	PASS	
10225.00†	7172.59	-1197.77	-2440.08	10076.55	7075.85	-400.00	-2458.35	83.09	803.82	289.93	2.78	PASS	
10325.00†	7172.30	-1200.16	-2540.05	10176.55	7075.26	-402.37	-2558.32	83.07	803.88	298.84	2.69	PASS	
10425.00†	7172.01	-1202.55	-2640.03	10276.55	7074.67	-404.73	-2658.29	83.05	803.95	307.76	2.62	PASS	
10525.00†	7171.72	-1204.94	-2740.00	10376.55	7074.07	-407.09	-2758.26	83.02	804.01	316.69	2.54	PASS	
10625.00†	7171.42	-1207.33	-2839.97	10476.55	7073.48	-409.45	-2858.23	83.00	804.08	325.63	2.47	PASS	
10725.00†	7171.13	-1209.72	-2939.94	10558.66	7073.00	-410.91	-2940.33	82.99	804.82	333.70	2.41	PASS	
10825.00†	7170.84	-1212.11	-3039.91	10629.06	7072.58	-409.70	-3010.71	83.00	808.94	340.87	2.38	PASS	
10925.00†	7170.55	-1214.51	-3139.88	10699.16	7072.16	-405.92	-3080.70	83.03	816.70	347.63	2.35	PASS	
11025.00†	7170.26	-1216.90	-3239.85	10768.75	7071.75	-399.62	-3150.01	83.09	828.08	353.92	2.34	PASS	
11125.00†	7169.97	-1219.29	-3339.82	10837.68	7071.34	-390.90	-3218.37	83.16	843.03	359.74	2.35	PASS	
11225.00†	7169.68	-1221.68	-3439.79	10905.77	7070.93	-379.88	-3285.56	83.25	861.49	365.07	2.36	PASS	
11325.00†	7169.38	-1224.07	-3539.76	11001.29	7070.37	-362.48	-3379.48	83.38	881.95	373.75	2.36	PASS	
11425.00†	7169.09	-1226.46	-3639.74	11099.15	7069.79	-344.64	-3475.70	83.51	902.42	382.73	2.36	PASS	
11525.00†	7168.80	-1228.85	-3739.71	11276.13	7068.74	-319.44	-3650.81	83.69	919.20	400.42	2.30	PASS	
11625.00†	7168.51	-1231.24	-3839.68	11464.69	7067.62	-310.51	-3839.08	83.74	926.25	415.86	2.23	PASS	
11725.00†	7168.22	-1233.63	-3939.65	11564.66	7067.03	-310.51	-3939.05	83.74	928.66	424.93	2.19	PASS	
11825.00†	7167.93	-1236.02	-4039.62	11664.63	7066.44	-310.51	-4039.02	83.74	931.07	433.99	2.15	PASS	
11925.00†	7167.64	-1238.41	-4139.59	11764.60	7065.85	-310.51	-4138.99	83.73	933.48	443.07	2.11	PASS	
12025.00†	7167.34	-1240.81	-4239.56	11864.58	7065.26	-310.51	-4238.96	83.73	935.88	452.15	2.07	PASS	
12125.00†	7167.05	-1243.20	-4339.53	11964.55	7064.66	-310.51	-4338.93	83.73	938.29	461.24	2.04	PASS	
12225.00†	7166.76	-1245.59	-4439.50	12064.52	7064.07	-310.51	-4438.90	83.73	940.70	470.33	2.00	PASS	
12325.00†	7166.47	-1247.98	-4539.47	12164.49	7063.48	-310.51	-4538.87	83.73	943.11	479.42	1.97	PASS	
12425.00†	7166.18	-1250.37	-4639.45	12264.46	7062.89	-310.51	-4638.83	83.72	945.52	488.52	1.94	PASS	
12525.00†	7165.89	-1252.76	-4739.42	12364.43	7062.30	-310.51	-4738.80	83.72	947.93	497.62	1.91	PASS	
12625.00†	7165.60	-1255.15	-4839.39	12464.40	7061.71	-310.51	-4838.77	83.72	950.34	506.72	1.88	PASS	
12725.00†	7165.30	-1257.54	-4939.36	12564.37	7061.12	-310.51	-4938.74	83.72	952.75	515.83	1.85	PASS	
12825.00†	7165.01	-1259.93	-5039.33	12664.34	7060.52	-310.51	-5038.71	83.71	955.16	524.94	1.82	PASS	
12925.00†	7164.72	-1262.32	-5139.30	12764.31	7059.93	-310.51	-5138.68	83.71	957.57	534.05	1.79	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 63 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DONN 31N-20C-L PWB Offset Wellpath: DONN 31N-20C-L PWP (REV-B.0)

Facility: SEC.21-T06N-R66W Slot: SLOT#19 DONN 31N-20C-L (858'FNL & 251'FEL, SEC.21) Well: DONN 31N-20C-L Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
13025.00†	7164.43	-1264.71	-5239.27	12864.29	7059.34	-310.51	-5238.65	83.71	959.98	543.17	1.77	PASS	
13125.00†	7164.14	-1267.10	-5339.24	12964.26	7058.75	-310.51	-5338.62	83.71	962.39	552.29	1.74	PASS	
13225.00†	7163.85	-1269.50	-5439.21	13064.23	7058.16	-310.51	-5438.59	83.71	964.80	561.41	1.72	PASS	
13325.00†	7163.56	-1271.89	-5539.18	13164.20	7057.57	-310.51	-5538.56	83.70	967.21	570.53	1.70	PASS	
13425.00†	7163.26	-1274.28	-5639.16	13264.17	7056.98	-310.51	-5638.53	83.70	969.62	579.66	1.67	PASS	
13525.00†	7162.97	-1276.67	-5739.13	13364.14	7056.39	-310.51	-5738.50	83.70	972.02	588.78	1.65	PASS	
13625.00†	7162.68	-1279.06	-5839.10	13464.11	7055.79	-310.51	-5838.46	83.70	974.43	597.91	1.63	PASS	
13725.00†	7162.39	-1281.45	-5939.07	13564.08	7055.20	-310.51	-5938.43	83.69	976.84	607.04	1.61	PASS	
13825.00†	7162.10	-1283.84	-6039.04	13664.05	7054.61	-310.51	-6038.40	83.69	979.25	616.17	1.59	PASS	
13925.00†	7161.81	-1286.23	-6139.01	13764.02	7054.02	-310.51	-6138.37	83.69	981.66	625.31	1.57	PASS	
14025.00†	7161.51	-1288.62	-6238.98	13863.99	7053.43	-310.51	-6238.34	83.69	984.07	634.44	1.55	PASS	
14032.94	7161.49	-1288.81	-6246.92	13871.93	7053.38	-310.51	-6246.28	83.69	984.26	635.17	1.55	PASS	
14125.00†	7161.22	-1288.79	-6338.97	13967.13	7052.82	-310.52	-6341.48	83.68	984.27	643.74	1.53	PASS	
14211.94	7160.97	-1284.71	-6425.81	14084.78	7052.12	-313.66	-6459.07	83.59	977.69	652.87	1.50	PASS	
14225.00†	7160.93	-1283.79	-6438.83	14097.76	7052.04	-314.12	-6472.05	83.58	976.34	654.05	1.49	PASS	
14325.00†	7160.64	-1276.82	-6538.59	14197.22	7051.45	-317.59	-6571.44	83.49	965.99	663.05	1.46	PASS	
14411.94	7160.39	-1270.75	-6625.32	14283.68	7050.94	-320.60	-6667.85	83.42	956.99	670.88	1.43	PASS	
14425.00†	7160.35	-1269.89	-6638.35	14296.67	7050.87	-321.06	-6670.83	83.41	955.68	672.06	1.42	PASS	
14525.00†	7160.06	-1266.21	-6738.27	14396.40	7050.28	-324.54	-6770.50	83.36	948.60	681.10	1.39	PASS	
14625.00†	7159.76	-1267.77	-6838.25	14496.37	7049.68	-328.03	-6870.41	83.32	946.71	690.19	1.37	PASS	
14725.00†	7159.47	-1274.55	-6938.00	14596.31	7049.09	-331.51	-6970.28	83.31	950.02	699.29	1.36	PASS	
14825.00†	7159.17	-1286.55	-7037.27	14696.93	7048.50	-334.99	-7069.84	83.31	958.53	708.36	1.35	PASS	
14925.00†	7158.88	-1303.73	-7135.77	14794.97	7047.92	-338.45	-7168.82	83.33	972.20	717.36	1.36	PASS	
14937.60	7158.84	-1306.26	-7148.12	14807.40	7047.84	-338.88	-7181.24	83.33	974.29	718.49	1.36	PASS	
15025.00†	7158.59	-1324.09	-7233.68	14893.53	7047.34	-341.89	-7267.32	83.42	989.05	726.30	1.36	PASS	
15037.60	7158.55	-1326.66	-7246.02	14905.95	7047.26	-342.32	-7279.73	83.43	991.18	727.43	1.36	PASS	
15125.00†	7158.30	-1342.52	-7331.95	14992.39	7046.75	-345.34	-7366.11	83.55	1003.98	735.28	1.37	PASS	
15225.00†	7158.01	-1355.83	-7431.05	15091.89	7046.16	-348.81	-7465.55	83.64	1013.80	744.34	1.36	PASS	
15325.00†	7157.72	-1363.93	-7530.71	15191.77	7045.57	-352.30	-7565.37	83.67	1018.42	753.44	1.35	PASS	
15417.62	7157.45	-1366.77	-7623.28	15284.38	7045.02	-355.53	-7657.92	83.66	1018.07	761.88	1.34	PASS	
15425.00†	7157.43	-1366.82	-7630.66	15291.76	7044.98	-355.78	-7665.30	83.66	1017.86	762.55	1.34	PASS	
15525.00†	7157.14	-1367.46	-7730.65	15391.72	7044.39	-359.27	-7765.19	83.63	1015.06	771.65	1.32	PASS	
15625.00†	7156.85	-1368.11	-7830.65	15491.68	7043.80	-362.76	-7865.09	83.59	1012.27	780.74	1.30	PASS	
15725.00†	7156.56	-1368.75	-7930.65	15591.63	7043.20	-366.25	-7964.98	83.56	1009.48	789.83	1.28	PASS	
15825.00†	7156.27	-1369.40	-8030.65	15691.59	7042.61	-369.74	-8064.88	83.52	1006.68	798.93	1.26	PASS	
15925.00†	7155.98	-1370.04	-8130.64	15791.55	7042.02	-373.23	-8164.78	83.48	1003.89	808.02	1.24	PASS	
16025.00†	7155.70	-1370.69	-8230.64	15891.51	7041.43	-376.72	-8264.67	83.45	1001.10	817.11	1.23	PASS	
16125.00†	7155.41	-1371.33	-8330.64	15991.47	7040.84	-380.20	-8364.57	83.41	998.31	826.20	1.21	PASS	
16225.00†	7155.12	-1371.98	-8430.64	16159.71	7039.85	-390.63	-8532.44	83.32	993.32	835.35	1.19	PASS	
16325.00†	7154.83	-1372.62	-8530.63	16269.67	7039.20	-403.11	-8641.69	83.22	982.68	843.89	1.16	PASS	
16425.00†	7154.54	-1373.27	-8630.63	16369.09	7038.62	-414.50	-8740.45	83.13	971.98	852.77	1.14	PASS	
16525.00†	7154.25	-1373.91	-8730.63	16468.50	7038.04	-425.88	-8839.21	83.03	961.28	861.64	1.12	PASS	
16625.00†	7153.97	-1374.56	-8830.63	16567.92	7037.46	-437.26	-8937.97	82.94	950.59	870.50	1.09	PASS	
16725.00†	7153.68	-1375.20	-8930.62	16667.33	7036.87	-448.64	-9036.72	82.84	939.90	879.35	1.07	PASS	
16825.00†	7153.39	-1375.85	-9030.62	16766.74	7036.29	-460.03	-9135.48	82.74	929.21	888.19	1.05	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 64 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DONN 31N-20C-L PWB Offset Wellpath: DONN 31N-20C-L PWP (REV-B.0)

Facility: SEC.21-T06N-R66W Slot: SLOT#19 DONN 31N-20C-L (858'FNL & 251'FEL, SEC.21) Well: DONN 31N-20C-L Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
16925.00†	7153.10	-1376.49	-9130.62	16866.16	7035.71	-471.41	-9234.24	82.63	918.53	897.02	1.02	PASS	
17025.00†	7152.81	-1377.14	-9230.62	16965.57	7035.13	-482.79	-9333.00	82.53	907.85	905.84	1.00	PASS	
17125.00†	7152.52	-1377.78	-9330.61	17064.98	7034.54	-494.17	-9431.76	82.42	897.17	914.65	0.98	FAIL	
17225.00†	7152.24	-1378.43	-9430.61	17164.40	7033.96	-505.56	-9530.52	82.31	886.50	923.45	0.96	FAIL	
17325.00†	7151.95	-1379.07	-9530.61	17263.81	7033.38	-516.94	-9629.27	82.19	875.83	932.24	0.94	FAIL	
17425.00†	7151.66	-1379.72	-9630.61	17363.22	7032.80	-528.32	-9728.03	82.08	865.16	941.01	0.92	FAIL	
17525.00†	7151.37	-1380.36	-9730.60	17462.64	7032.21	-539.70	-9826.79	81.96	854.49	949.77	0.90	FAIL	
17625.00†	7151.08	-1381.01	-9830.60	17562.05	7031.63	-551.08	-9925.55	81.83	843.83	958.52	0.88	FAIL	
17725.00†	7150.79	-1381.65	-9930.60	17661.47	7031.05	-562.47	-10024.31	81.71	833.18	967.25	0.86	FAIL	
17825.00†	7150.51	-1382.30	-10030.60	17760.88	7030.47	-573.85	-10123.06	81.58	822.53	975.97	0.84	FAIL	
17925.00†	7150.22	-1382.94	-10130.59	17840.66	7030.00	-582.98	-10202.32	81.47	812.11	985.67	0.82	FAIL	
18000.08†	7150.00	-1383.43	-10205.67	17840.66	7030.00	-582.98	-10202.32	81.47	809.39	990.80	0.82	FAIL	
18000.13	7150.00	-1383.43	-10205.72	17840.66	7030.00	-582.98	-10202.32	81.47	809.40	990.45	0.82	FAIL	

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: DONN 31N-20C-L PWB Offset Wellpath: DONN 31N-20C-L PWP (REV-B.0)

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: DONN 31N-20C-L PWB Offset Wellpath: DONN 31N-20C-L PWP (REV-B.0)

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
13.5in Open Hole	25.00	1750.00	1725.00	24.00	1737.09	48.86	0.34	24.26	50.64
9.625in Casing Surface	25.00	1750.00	1725.00	24.00	1737.09	48.86	0.34	24.26	50.64
8.5in Open Hole	1750.00	17840.66	16090.66	1737.09	N/A	24.26	50.64	N/A	N/A

SURVEY PROGRAM - Offset Wellbore: DONN 31N-20C-L PWB Offset Wellpath: DONN 31N-20C-L PWP (REV-B.0)

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
25.00	1775.00	Custom BHI NaviTrak (Standard Rotating+Axial Corr) (Rockies 0.03Gt model)		DONN 31N-20C-L PWB
1775.00	17840.66	Custom BHI AutoTrak Curve (IFR1, Short) (Rockies 0.03Gt model)		DONN 31N-20C-L PWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: DONN 31N-20C-L PWB Offset Wellpath: DONN 31N-20C-L PWP (REV-B.0)

MD Reference: PRECISION DRILLING (25') (RKB)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	25.00ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 65 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DONN 31C-20-L PWB Offset Wellpath: DONN 31C-20-L PWP (REV-A.0)

Facility: SEC.21-T06N-R66W Slot: SLOT#18 DONN 31C-20-L (838'FNL & 251'FEL, SEC.21) Well: DONN 31C-20-L Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	26.00	25.00	100.19	0.56	0.32	100.19	1.57	164.92	PASS	
125.00†	125.00	0.00	0.00	126.00	125.00	100.19	0.56	0.32	100.19	1.89	107.38	PASS	
225.00†	225.00	0.00	0.00	226.00	225.00	100.19	0.56	0.32	100.19	2.46	66.45	PASS	
300.00	300.00	0.00	0.00	301.01	300.01	100.19	0.56	0.32	100.19	2.90	51.16	PASS	
325.00†	325.00	-0.09	0.06	326.23	325.23	100.16	0.67	-143.45	100.25	3.05	47.53	PASS	
425.00†	424.96	-2.20	1.61	427.10	426.06	99.45	3.28	-142.85	101.67	3.87	34.68	PASS	
525.00†	524.77	-7.13	5.22	527.87	526.63	97.83	9.30	-141.53	105.05	4.98	25.91	PASS	
625.00†	624.30	-14.86	10.88	628.45	626.73	95.30	18.72	-139.63	110.46	5.92	22.11	PASS	
725.00†	723.44	-25.39	18.59	728.33	725.84	92.08	30.68	-137.72	118.11	6.79	20.11	PASS	
825.00†	822.07	-38.71	28.34	827.79	824.51	88.82	42.77	-136.99	128.37	7.69	18.95	PASS	
895.18	890.91	-49.71	36.39	897.42	893.58	86.54	51.24	-137.11	137.08	8.31	18.53	PASS	
925.00†	920.09	-54.67	40.02	926.97	922.90	85.57	54.84	-137.31	141.05	8.54	18.49	PASS	
1025.00†	1017.94	-71.32	52.20	1026.07	1021.21	82.33	66.89	-137.89	154.38	9.29	18.43	PASS	
1125.00†	1115.79	-87.96	64.39	1125.17	1119.52	79.08	78.94	-138.38	167.72	10.06	18.34	PASS	
1225.00†	1213.64	-104.60	76.57	1224.26	1217.82	75.84	90.99	-138.79	181.07	10.83	18.24	PASS	
1325.00†	1311.48	-121.25	88.76	1323.36	1316.13	72.59	103.04	-139.15	194.42	11.63	18.14	PASS	
1425.00†	1409.33	-137.89	100.94	1422.46	1414.44	69.35	115.09	-139.47	207.79	12.43	18.04	PASS	
1525.00†	1507.18	-154.53	113.12	1521.55	1512.75	66.11	127.14	-139.74	221.16	13.23	17.94	PASS	
1625.00†	1605.03	-171.18	125.31	1620.65	1611.06	62.86	139.19	-139.98	234.53	14.05	17.85	PASS	
1725.00†	1702.88	-187.82	137.49	1719.75	1709.36	59.62	151.24	-140.20	247.91	14.87	17.76	PASS	
1825.00†	1800.73	-204.47	149.67	1818.85	1807.67	56.37	163.30	-140.40	261.29	15.08	18.13	PASS	
1925.00†	1898.58	-221.11	161.86	1917.94	1905.98	53.13	175.35	-140.57	274.67	15.23	18.86	PASS	
2025.00†	1996.43	-237.75	174.04	2017.04	2004.29	49.88	187.40	-140.73	288.05	15.45	19.49	PASS	
2125.00†	2094.28	-254.40	186.22	2116.14	2102.60	46.64	199.45	-140.88	301.44	15.75	19.99	PASS	
2225.00†	2192.13	-271.04	198.41	2215.23	2200.90	43.39	211.50	-141.01	314.83	16.12	20.38	PASS	
2325.00†	2289.98	-287.68	210.59	2314.33	2299.21	40.15	223.55	-141.14	328.22	16.57	20.65	PASS	
2425.00†	2387.83	-304.33	222.77	2413.43	2397.52	36.90	235.60	-141.25	341.61	17.07	20.83	PASS	
2525.00†	2485.68	-320.97	234.96	2512.53	2495.83	33.66	247.65	-141.35	355.00	17.64	20.93	PASS	
2625.00†	2583.53	-337.62	247.14	2611.62	2594.14	30.41	259.70	-141.45	368.40	18.26	20.95	PASS	
2725.00†	2681.38	-354.26	259.33	2710.72	2692.44	27.17	271.76	-141.54	381.79	18.92	20.92	PASS	
2825.00†	2779.23	-370.90	271.51	2809.82	2790.75	23.93	283.81	-141.62	395.19	19.63	20.85	PASS	
2925.00†	2877.08	-387.55	283.69	2908.91	2889.06	20.68	295.86	-141.70	408.58	20.38	20.74	PASS	
3025.00†	2974.93	-404.19	295.88	3008.01	2987.37	17.44	307.91	-141.77	421.98	21.16	20.60	PASS	
3125.00†	3072.78	-420.83	308.06	3107.11	3085.68	14.19	319.96	-141.84	435.38	21.97	20.44	PASS	
3225.00†	3170.63	-437.48	320.24	3206.20	3183.99	10.95	332.01	-141.91	448.78	22.81	20.28	PASS	
3325.00†	3268.48	-454.12	332.43	3305.30	3282.29	7.70	344.06	-141.97	462.18	23.67	20.10	PASS	
3425.00†	3366.33	-470.77	344.61	3404.40	3380.60	4.46	356.11	-142.03	475.58	24.55	19.92	PASS	
3525.00†	3464.18	-487.41	356.79	3503.50	3478.91	1.21	368.16	-142.08	488.98	25.45	19.73	PASS	
3625.00†	3562.03	-504.05	368.98	3602.58	3577.22	-2.03	380.22	-142.13	502.38	26.37	19.55	PASS	
3725.00†	3659.88	-520.70	381.16	3701.69	3675.53	-5.28	392.27	-142.18	515.78	27.30	19.37	PASS	
3825.00†	3757.73	-537.34	393.34	3800.79	3773.83	-8.52	404.32	-142.23	529.18	28.25	19.19	PASS	
3925.00†	3855.57	-553.98	405.53	3899.88	3872.14	-11.77	416.37	-142.27	542.58	29.21	19.01	PASS	
4025.00†	3953.42	-570.63	417.71	3998.98	3970.45	-15.01	428.42	-142.31	555.98	30.18	18.84	PASS	
4125.00†	4051.27	-587.27	429.90	4098.08	4068.76	-18.25	440.47	-142.35	569.38	31.16	18.67	PASS	
4225.00†	4149.12	-603.92	442.08	4197.18	4167.07	-21.50	452.52	-142.39	582.79	32.15	18.51	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 66 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DONN 31C-20-L PWB Offset Wellpath: DONN 31C-20-L PWP (REV-A.0)

Facility: SEC.21-T06N-R66W Slot: SLOT#18 DONN 31C-20-L (838'FNL & 251'FEL, SEC.21) Well: DONN 31C-20-L Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
4325.00†	4246.97	-620.56	454.26	4296.27	4265.37	-24.74	464.57	-142.43	596.19	33.15	18.36	PASS	
4425.00†	4344.82	-637.20	466.45	4395.37	4363.68	-27.99	476.62	-142.46	609.59	34.16	18.20	PASS	
4525.00†	4442.67	-653.85	478.63	4494.47	4461.99	-31.23	488.68	-142.50	622.99	35.17	18.06	PASS	
4625.00†	4540.52	-670.49	490.81	4593.56	4560.30	-34.48	500.73	-142.53	636.40	36.19	17.92	PASS	
4725.00†	4638.37	-687.13	503.00	4692.66	4658.61	-37.72	512.78	-142.56	649.80	37.21	17.78	PASS	
4825.00†	4736.22	-703.78	515.18	4791.76	4756.91	-40.97	524.83	-142.59	663.20	38.24	17.65	PASS	
4925.00†	4834.07	-720.42	527.36	4890.86	4855.22	-44.21	536.88	-142.62	676.61	39.28	17.52	PASS	
5025.00†	4931.92	-737.07	539.55	4989.95	4953.53	-47.46	548.93	-142.64	690.01	40.32	17.40	PASS	
5125.00†	5029.77	-753.71	551.73	5089.05	5051.84	-50.70	560.98	-142.67	703.42	41.36	17.28	PASS	
5225.00†	5127.62	-770.35	563.91	5188.15	5150.15	-53.95	573.03	-142.69	716.82	42.41	17.17	PASS	
5325.00†	5225.47	-787.00	576.10	5287.24	5248.45	-57.19	585.08	-142.72	730.22	43.46	17.06	PASS	
5425.00†	5323.32	-803.64	588.28	5386.34	5346.76	-60.44	597.14	-142.74	743.63	44.52	16.96	PASS	
5525.00†	5421.17	-820.28	600.47	5485.44	5445.07	-63.68	609.19	-142.76	757.03	45.58	16.86	PASS	
5625.00†	5519.02	-836.93	612.65	5584.54	5543.38	-66.92	621.24	-142.79	770.44	46.64	16.76	PASS	
5725.00†	5616.87	-853.57	624.83	5683.63	5641.69	-70.17	633.29	-142.81	783.84	47.70	16.66	PASS	
5825.00†	5714.72	-870.22	637.02	5782.73	5740.00	-73.41	645.34	-142.83	797.25	48.77	16.57	PASS	
5925.00†	5812.57	-886.86	649.20	5881.83	5838.30	-76.66	657.39	-142.85	810.65	49.84	16.49	PASS	
6025.00†	5910.42	-903.50	661.38	5980.92	5936.61	-79.90	669.44	-142.87	824.06	50.91	16.40	PASS	
6125.00†	6008.27	-920.15	673.57	6080.02	6034.92	-83.15	681.49	-142.88	837.46	51.98	16.32	PASS	
6225.00†	6106.12	-936.79	685.75	6179.12	6133.23	-86.39	693.54	-142.90	850.87	53.06	16.24	PASS	
6325.00†	6203.97	-953.43	697.93	6278.22	6231.54	-89.64	705.60	-142.92	864.27	54.13	16.16	PASS	
6425.00†	6301.82	-970.08	710.12	6377.31	6329.84	-92.88	717.65	-142.94	877.68	55.21	16.09	PASS	
6525.00†	6399.66	-986.72	722.30	6476.41	6428.15	-96.13	729.70	-142.95	891.08	56.29	16.02	PASS	
6605.93	6478.85	-1000.19	732.16	6558.06	6509.24	-98.82	738.80	-143.02	901.91	57.17	15.96	PASS	
6625.00†	6497.54	-1003.38	734.20	6577.79	6528.93	-99.50	739.90	-150.60	904.44	57.34	15.96	PASS	
6725.00†	6595.97	-1020.39	735.57	6680.74	6631.61	-103.29	735.69	159.16	917.79	58.94	15.75	PASS	
6825.00†	6693.34	-1037.59	721.30	6782.82	6731.42	-107.36	715.25	126.99	931.03	60.52	15.55	PASS	
6925.00†	6787.24	-1054.57	691.74	6884.06	6825.92	-111.61	679.48	112.65	943.83	61.73	15.46	PASS	
7025.00†	6875.37	-1070.91	647.62	6984.51	6912.91	-115.92	629.63	104.96	955.89	63.02	15.33	PASS	
7125.00†	6955.55	-1086.20	590.03	7084.22	6990.43	-120.19	567.23	100.12	966.90	64.83	15.07	PASS	
7225.00†	7025.81	-1100.06	520.38	7183.22	7056.83	-124.32	494.05	96.78	976.59	66.95	14.73	PASS	
7325.00†	7084.42	-1112.16	440.40	7281.57	7110.78	-128.21	412.02	94.37	984.72	69.93	14.22	PASS	
7425.00†	7129.94	-1122.20	352.04	7379.29	7151.24	-131.77	323.25	92.64	991.08	73.68	13.57	PASS	
7525.00†	7161.25	-1129.93	257.49	7476.41	7177.53	-134.94	229.91	91.45	995.51	76.63	13.10	PASS	
7625.00†	7177.57	-1135.16	159.08	7572.96	7189.31	-137.64	134.22	90.74	997.90	82.87	12.14	PASS	
7682.94	7180.00	-1136.99	101.24	7629.59	7189.89	-139.01	77.61	90.57	998.32	85.83	11.72	PASS	
7725.00†	7179.88	-1138.00	59.19	7671.65	7189.69	-140.00	35.56	90.56	998.33	88.13	11.41	PASS	
7825.00†	7179.59	-1140.39	-40.78	7771.65	7189.23	-142.36	-64.41	90.55	998.35	93.96	10.70	PASS	
7925.00†	7179.29	-1142.78	-140.75	7871.65	7188.76	-144.72	-164.38	90.54	998.38	100.31	10.02	PASS	
8025.00†	7179.00	-1145.17	-240.72	7971.65	7188.30	-147.09	-264.35	90.53	998.41	107.08	9.38	PASS	
8125.00†	7178.71	-1147.56	-340.69	8071.65	7187.83	-149.45	-364.32	90.52	998.43	114.20	8.79	PASS	
8225.00†	7178.42	-1149.95	-440.66	8171.65	7187.36	-151.81	-464.29	90.51	998.46	121.60	8.25	PASS	
8325.00†	7178.13	-1152.34	-540.63	8271.65	7186.90	-154.17	-564.26	90.50	998.49	129.24	7.76	PASS	
8425.00†	7177.84	-1154.73	-640.61	8371.65	7186.43	-156.53	-664.23	90.49	998.52	137.08	7.32	PASS	
8525.00†	7177.55	-1157.12	-740.58	8471.65	7185.97	-158.90	-764.20	90.48	998.54	145.09	6.91	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 67 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DONN 31C-20-L PWB Offset Wellpath: DONN 31C-20-L PWP (REV-A.0)

Facility: SEC.21-T06N-R66W Slot: SLOT#18 DONN 31C-20-L (838'FNL & 251'FEL, SEC.21) Well: DONN 31C-20-L Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
8625.00†	7177.25	-1159.52	-840.55	8571.65	7185.50	-161.26	-864.17	90.47	998.57	153.23	6.54	PASS	
8725.00†	7176.96	-1161.91	-940.52	8671.65	7185.04	-163.62	-964.14	90.46	998.60	161.49	6.21	PASS	
8825.00†	7176.67	-1164.30	-1040.49	8771.65	7184.57	-165.98	-1064.12	90.45	998.63	169.85	5.90	PASS	
8925.00†	7176.38	-1166.69	-1140.46	8871.65	7184.10	-168.34	-1164.09	90.44	998.65	178.30	5.62	PASS	
9025.00†	7176.09	-1169.08	-1240.43	8971.65	7183.64	-170.71	-1264.06	90.43	998.68	186.82	5.36	PASS	
9125.00†	7175.80	-1171.47	-1340.40	9071.65	7183.17	-173.07	-1364.03	90.42	998.71	195.41	5.13	PASS	
9225.00†	7175.51	-1173.86	-1440.37	9171.65	7182.71	-175.43	-1464.00	90.41	998.74	204.05	4.91	PASS	
9325.00†	7175.21	-1176.25	-1540.34	9271.65	7182.24	-177.79	-1563.97	90.40	998.76	212.75	4.71	PASS	
9425.00†	7174.92	-1178.64	-1640.32	9371.65	7181.77	-180.16	-1663.94	90.39	998.79	221.48	4.52	PASS	
9525.00†	7174.63	-1181.03	-1740.29	9471.65	7181.31	-182.52	-1763.91	90.38	998.82	230.26	4.35	PASS	
9625.00†	7174.34	-1183.42	-1840.26	9571.65	7180.84	-184.88	-1863.88	90.37	998.85	239.07	4.19	PASS	
9725.00†	7174.05	-1185.82	-1940.23	9671.65	7180.38	-187.24	-1963.85	90.36	998.87	247.91	4.04	PASS	
9825.00†	7173.76	-1188.21	-2040.20	9771.65	7179.91	-189.60	-2063.82	90.35	998.90	256.78	3.90	PASS	
9925.00†	7173.47	-1190.60	-2140.17	9871.65	7179.45	-191.97	-2163.79	90.34	998.93	265.67	3.77	PASS	
10025.00†	7173.17	-1192.99	-2240.14	9971.65	7178.98	-194.33	-2263.77	90.33	998.96	274.59	3.64	PASS	
10125.00†	7172.88	-1195.38	-2340.11	10071.64	7178.51	-196.69	-2363.74	90.32	998.98	283.52	3.53	PASS	
10225.00†	7172.59	-1197.77	-2440.08	10171.64	7178.05	-199.05	-2463.71	90.31	999.01	292.48	3.42	PASS	
10325.00†	7172.30	-1200.16	-2540.05	10271.64	7177.58	-201.41	-2563.68	90.30	999.04	301.45	3.32	PASS	
10425.00†	7172.01	-1202.55	-2640.03	10371.64	7177.12	-203.78	-2663.65	90.29	999.07	310.44	3.22	PASS	
10525.00†	7171.72	-1204.94	-2740.00	10471.64	7176.65	-206.14	-2763.62	90.28	999.09	319.44	3.13	PASS	
10625.00†	7171.42	-1207.33	-2839.97	10571.64	7176.19	-208.50	-2863.59	90.27	999.12	328.45	3.05	PASS	
10725.00†	7171.13	-1209.72	-2939.94	10671.64	7175.72	-210.86	-2963.56	90.26	999.15	337.48	2.96	PASS	
10825.00†	7170.84	-1212.11	-3039.91	10771.64	7175.25	-213.23	-3063.53	90.25	999.18	346.51	2.89	PASS	
10925.00†	7170.55	-1214.51	-3139.88	10871.64	7174.79	-215.59	-3163.50	90.24	999.21	355.56	2.81	PASS	
11025.00†	7170.26	-1216.90	-3239.85	10971.64	7174.32	-217.95	-3263.47	90.23	999.23	364.62	2.74	PASS	
11125.00†	7169.97	-1219.29	-3339.82	11071.64	7173.86	-220.31	-3363.44	90.22	999.26	373.68	2.68	PASS	
11225.00†	7169.68	-1221.68	-3439.79	11171.64	7173.39	-222.67	-3463.42	90.21	999.29	382.75	2.61	PASS	
11325.00†	7169.38	-1224.07	-3539.76	11271.64	7172.93	-225.04	-3563.39	90.20	999.32	391.83	2.55	PASS	
11425.00†	7169.09	-1226.46	-3639.74	11371.64	7172.46	-227.40	-3663.36	90.19	999.35	400.92	2.50	PASS	
11525.00†	7168.80	-1228.85	-3739.71	11471.64	7171.99	-229.76	-3763.33	90.18	999.37	410.02	2.44	PASS	
11625.00†	7168.51	-1231.24	-3839.68	11571.64	7171.53	-232.12	-3863.30	90.17	999.40	419.12	2.39	PASS	
11725.00†	7168.22	-1233.63	-3939.65	11671.64	7171.06	-234.48	-3963.27	90.16	999.43	428.22	2.34	PASS	
11825.00†	7167.93	-1236.02	-4039.62	11771.64	7170.60	-236.85	-4063.24	90.15	999.46	437.33	2.29	PASS	
11925.00†	7167.64	-1238.41	-4139.59	11871.64	7170.13	-239.21	-4163.21	90.14	999.49	446.45	2.24	PASS	
12025.00†	7167.34	-1240.81	-4239.56	11971.64	7169.67	-241.57	-4263.18	90.13	999.52	455.57	2.20	PASS	
12125.00†	7167.05	-1243.20	-4339.53	12071.64	7169.20	-243.93	-4363.15	90.12	999.54	464.69	2.15	PASS	
12225.00†	7166.76	-1245.59	-4439.50	12171.64	7168.73	-246.30	-4463.12	90.11	999.57	473.82	2.11	PASS	
12325.00†	7166.47	-1247.98	-4539.47	12271.64	7168.27	-248.66	-4563.10	90.10	999.60	482.95	2.07	PASS	
12425.00†	7166.18	-1250.37	-4639.45	12371.64	7167.80	-251.02	-4663.07	90.09	999.63	492.09	2.03	PASS	
12525.00†	7165.89	-1252.76	-4739.42	12471.64	7167.34	-253.38	-4763.04	90.08	999.66	501.23	2.00	PASS	
12625.00†	7165.60	-1255.15	-4839.39	12571.64	7166.87	-255.74	-4863.01	90.07	999.69	510.38	1.96	PASS	
12725.00†	7165.30	-1257.54	-4939.36	12671.64	7166.41	-258.11	-4962.98	90.06	999.71	519.52	1.93	PASS	
12825.00†	7165.01	-1259.93	-5039.33	12771.64	7165.94	-260.47	-5062.95	90.05	999.74	528.67	1.89	PASS	
12925.00†	7164.72	-1262.32	-5139.30	12871.64	7165.47	-262.83	-5162.92	90.04	999.77	537.82	1.86	PASS	
13025.00†	7164.43	-1264.71	-5239.27	12971.64	7165.01	-265.19	-5262.89	90.03	999.80	546.98	1.83	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 68 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DONN 31C-20-L PWB Offset Wellpath: DONN 31C-20-L PWP (REV-A.0)

Facility: SEC.21-T06N-R66W Slot: SLOT#18 DONN 31C-20-L (838'FNL & 251'FEL, SEC.21) Well: DONN 31C-20-L Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
13125.00†	7164.14	-1267.10	-5339.24	13071.64	7164.54	-267.55	-5362.86	90.02	999.83	556.14	1.80	PASS	
13225.00†	7163.85	-1269.50	-5439.21	13171.64	7164.08	-269.92	-5462.83	90.01	999.86	565.30	1.77	PASS	
13325.00†	7163.56	-1271.89	-5539.18	13271.64	7163.61	-272.28	-5562.80	90.00	999.89	574.46	1.74	PASS	
13425.00†	7163.26	-1274.28	-5639.16	13371.64	7163.14	-274.64	-5662.77	89.99	999.92	583.63	1.71	PASS	
13525.00†	7162.97	-1276.67	-5739.13	13471.64	7162.68	-277.00	-5762.75	89.98	999.94	592.79	1.69	PASS	
13625.00†	7162.68	-1279.06	-5839.10	13571.64	7162.21	-279.37	-5862.72	89.97	999.97	601.96	1.66	PASS	
13725.00†	7162.39	-1281.45	-5939.07	13671.64	7161.75	-281.73	-5962.69	89.96	1000.00	611.13	1.64	PASS	
13825.00†	7162.10	-1283.84	-6039.04	13771.64	7161.28	-284.09	-6062.66	89.95	1000.03	620.30	1.61	PASS	
13925.00†	7161.81	-1286.23	-6139.01	13871.64	7160.82	-286.45	-6162.63	89.94	1000.06	629.48	1.59	PASS	
14025.00†	7161.51	-1288.62	-6238.98	13971.64	7160.35	-288.81	-6262.60	89.93	1000.09	638.65	1.57	PASS	
14032.94	7161.49	-1288.81	-6246.92	13979.58	7160.31	-289.00	-6270.54	89.93	1000.09	639.38	1.56	PASS	
14125.00†	7161.22	-1288.79	-6338.97	14071.60	7159.88	-291.18	-6362.54	89.93	997.90	647.84	1.54	PASS	
14211.94	7160.97	-1284.71	-6425.81	14158.32	7159.48	-293.22	-6449.23	89.93	991.76	655.84	1.51	PASS	
14225.00†	7160.93	-1283.79	-6438.83	14171.32	7159.42	-293.53	-6462.22	89.93	990.54	657.04	1.51	PASS	
14325.00†	7160.64	-1276.82	-6538.59	14270.89	7158.96	-295.88	-6561.76	89.92	981.21	666.22	1.47	PASS	
14411.94	7160.39	-1270.75	-6625.32	14357.45	7158.55	-297.93	-6648.30	89.91	973.10	674.20	1.44	PASS	
14425.00†	7160.35	-1269.89	-6638.35	14370.45	7158.49	-298.23	-6661.30	89.91	971.93	675.40	1.44	PASS	
14525.00†	7160.06	-1266.21	-6738.27	14470.26	7158.03	-300.59	-6761.08	89.89	965.89	684.60	1.41	PASS	
14625.00†	7159.76	-1267.77	-6838.25	14570.24	7157.56	-302.95	-6861.03	89.87	965.08	693.79	1.39	PASS	
14725.00†	7159.47	-1274.55	-6938.00	14670.13	7157.10	-305.31	-6960.89	89.85	969.51	702.94	1.38	PASS	
14825.00†	7159.17	-1286.55	-7037.27	14769.66	7156.63	-307.66	-7060.39	89.83	979.16	712.01	1.38	PASS	
14925.00†	7158.88	-1303.73	-7135.77	14868.54	7156.17	-310.00	-7159.24	89.81	994.01	720.96	1.38	PASS	
14937.60	7158.84	-1306.26	-7148.12	14880.94	7156.12	-310.29	-7171.64	89.81	996.25	722.08	1.38	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: DONN 31C-20-L PWB Offset Wellpath: DONN 31C-20-L PWP (REV-A.0)

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: DONN 31C-20-L PWB Offset Wellpath: DONN 31C-20-L PWP (REV-A.0)

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
13.5in Open Hole	25.00	1750.00	1725.00	24.00	1739.37	61.07	0.34	48.41	47.39
9.625in Casing Surface	25.00	1750.00	1725.00	24.00	1739.37	61.07	0.34	48.41	47.39
8.5in Open Hole	1750.00	17911.58	16161.58	1739.37	N/A	48.41	47.39	N/A	N/A

SURVEY PROGRAM - Offset Wellbore: DONN 31C-20-L PWB Offset Wellpath: DONN 31C-20-L PWP (REV-A.0)

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
25.00	1750.00	Custom BHI NaviTrak (Standard Rotating+Axial Corr) (Rockies 0.03Gt model)		DONN 31C-20-L PWB
1750.00	17911.58	Custom BHI AutoTrak Curve (IFR1, Short) (Rockies 0.03Gt model)		DONN 31C-20-L PWB



REFERENCE WELLPATH IDENTIFICATION			
Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

OFFSET WELLPATH REFERENCE - Offset Wellbore: DONN 31C-20-L PWB Offset Wellpath: DONN 31C-20-L PWP (REV-A.0)	
MD Reference: PRECISION DRILLING (25') (RKB)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	25.00ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 70 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: WARD M-20-19HN PWB Offset Wellpath: WARD M-20-19HN PWP

Facility: SEC.20-T06N-R66W Slot: SLOT#03 WARD #M-20-19HN Well: WARD M-20-19HN Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00†	25.00	0.00	0.00	1735.48	1721.55	-3725.41	-5183.10	-125.71	6604.66	50.66	132.58	PASS	
125.00†	125.00	0.00	0.00	1829.96	1810.81	-3695.41	-5175.45	-125.53	6579.00	50.97	131.25	PASS	
225.00†	225.00	0.00	0.00	1924.44	1900.07	-3665.41	-5167.79	-125.35	6553.41	51.29	129.92	PASS	
300.00†	300.00	0.00	0.00	1995.30	1967.02	-3642.91	-5162.05	-125.21	6534.26	51.54	128.89	PASS	
325.00†	325.00	-0.09	0.06	2018.89	1989.31	-3635.42	-5160.14	91.17	6527.89	51.63	128.54	PASS	
425.00†	424.96	-2.20	1.61	2112.79	2078.02	-3605.60	-5152.54	91.90	6502.49	51.99	127.14	PASS	
525.00†	524.77	-7.13	5.22	2205.81	2165.91	-3576.06	-5145.00	92.66	6477.30	52.37	125.71	PASS	
625.00†	624.30	-14.86	10.88	2297.85	2252.87	-3546.83	-5137.54	93.43	6452.39	52.77	124.26	PASS	
725.00†	723.44	-25.39	18.59	2388.80	2338.79	-3517.96	-5130.18	94.23	6427.84	53.19	122.80	PASS	
825.00†	822.07	-38.71	28.34	2478.54	2423.57	-3489.46	-5122.91	95.04	6403.73	53.63	121.32	PASS	
895.18	890.91	-49.71	36.39	2540.73	2482.34	-3469.71	-5117.87	95.61	6387.13	53.95	120.27	PASS	
925.00†	920.09	-54.67	40.02	2567.02	2507.17	-3461.36	-5115.74	95.71	6380.14	54.09	119.83	PASS	
1025.00†	1017.94	-71.32	52.20	2655.17	2590.45	-3433.37	-5108.60	96.06	6356.89	54.57	118.33	PASS	
1125.00†	1115.79	-87.96	64.39	2743.32	2673.73	-3405.38	-5101.46	96.40	6333.91	55.07	116.82	PASS	
1225.00†	1213.64	-104.60	76.57	2831.47	2757.01	-3377.39	-5094.31	96.75	6311.20	55.58	115.30	PASS	
1325.00†	1311.48	-121.25	88.76	2919.61	2840.29	-3349.40	-5087.17	97.10	6288.76	56.12	113.77	PASS	
1425.00†	1409.33	-137.89	100.94	3007.76	2923.57	-3321.41	-5080.03	97.46	6266.59	56.68	112.24	PASS	
1525.00†	1507.18	-154.53	113.12	3095.91	3006.85	-3293.42	-5072.89	97.81	6244.71	57.26	110.70	PASS	
1625.00†	1605.03	-171.18	125.31	3184.06	3090.13	-3265.43	-5065.75	98.17	6223.10	57.85	109.16	PASS	
1725.00†	1702.88	-187.82	137.49	3272.21	3173.42	-3237.44	-5058.61	98.53	6201.78	58.47	107.63	PASS	
1825.00†	1800.73	-204.47	149.67	3360.35	3256.69	-3209.45	-5051.47	98.89	6180.74	58.86	106.16	PASS	
1925.00†	1898.58	-221.11	161.86	3448.50	3339.98	-3181.46	-5044.33	99.25	6160.00	59.45	104.74	PASS	
2025.00†	1996.43	-237.75	174.04	3536.65	3423.26	-3153.47	-5037.19	99.62	6139.55	60.07	103.31	PASS	
2125.00†	2094.28	-254.40	186.22	3624.80	3506.54	-3125.47	-5030.04	99.98	6119.40	60.71	101.87	PASS	
2225.00†	2192.13	-271.04	198.41	3712.95	3589.82	-3097.48	-5022.90	100.35	6099.54	61.38	100.42	PASS	
2325.00†	2289.98	-287.68	210.59	3801.10	3673.10	-3069.49	-5015.76	100.72	6079.99	62.07	98.97	PASS	
2425.00†	2387.83	-304.33	222.77	3889.24	3756.38	-3041.50	-5008.62	101.09	6060.74	62.79	97.52	PASS	
2525.00†	2485.68	-320.97	234.96	3977.39	3839.66	-3013.51	-5001.48	101.47	6041.80	63.53	96.07	PASS	
2625.00†	2583.53	-337.62	247.14	4065.54	3922.94	-2985.52	-4994.34	101.85	6023.17	64.29	94.63	PASS	
2725.00†	2681.38	-354.26	259.33	4153.69	4006.22	-2957.53	-4987.20	102.22	6004.85	65.08	93.19	PASS	
2825.00†	2779.23	-370.90	271.51	4241.83	4089.50	-2929.54	-4980.06	102.60	5986.85	65.88	91.76	PASS	
2925.00†	2877.08	-387.55	283.69	4329.98	4172.78	-2901.55	-4972.92	102.99	5969.17	66.71	90.34	PASS	
3025.00†	2974.93	-404.19	295.88	4418.13	4256.06	-2873.56	-4965.78	103.37	5951.81	67.57	88.93	PASS	
3125.00†	3072.78	-420.83	308.06	4506.28	4339.34	-2845.57	-4958.63	103.75	5934.78	68.44	87.53	PASS	
3225.00†	3170.63	-437.48	320.24	4594.43	4422.62	-2817.58	-4951.49	104.14	5918.07	69.33	86.15	PASS	
3325.00†	3268.48	-454.12	332.43	4682.58	4505.90	-2789.59	-4944.35	104.53	5901.70	70.25	84.79	PASS	
3425.00†	3366.33	-470.77	344.61	4770.72	4589.18	-2761.60	-4937.21	104.92	5885.65	71.18	83.44	PASS	
3525.00†	3464.18	-487.41	356.79	4858.87	4672.46	-2733.61	-4930.07	105.31	5869.95	72.13	82.11	PASS	
3625.00†	3562.03	-504.05	368.98	4947.02	4755.74	-2705.62	-4922.93	105.71	5854.58	73.10	80.79	PASS	
3725.00†	3659.88	-520.70	381.16	5035.17	4839.02	-2677.62	-4915.79	106.10	5839.55	74.09	79.50	PASS	
3825.00†	3757.73	-537.34	393.34	5123.32	4922.30	-2649.63	-4908.65	106.50	5824.87	75.10	78.23	PASS	
3925.00†	3855.57	-553.98	405.53	5211.46	5005.58	-2621.64	-4901.51	106.90	5810.54	76.12	76.98	PASS	
4025.00†	3953.42	-570.63	417.71	5300.00	5089.23	-2593.53	-4894.33	107.30	5796.55	77.16	75.75	PASS	
4125.00†	4051.27	-587.27	429.90	5387.76	5172.14	-2565.66	-4887.22	107.70	5782.92	78.22	74.54	PASS	
4225.00†	4149.12	-603.92	442.08	5475.91	5255.42	-2537.67	-4880.08	108.10	5769.64	79.29	73.36	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 71 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: WARD M-20-19HN PWB Offset Wellpath: WARD M-20-19HN PWP

Facility: SEC.20-T06N-R66W Slot: SLOT#03 WARD #M-20-19HN Well: WARD M-20-19HN Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
4325.00†	4246.97	-620.56	454.26	5564.06	5338.70	-2509.68	-4872.94	108.51	5756.71	80.38	72.19	PASS	
4425.00†	4344.82	-637.20	466.45	5652.20	5421.98	-2481.69	-4865.80	108.92	5744.15	81.48	71.05	PASS	
4525.00†	4442.67	-653.85	478.63	5740.35	5505.26	-2453.70	-4858.66	109.32	5731.95	82.59	69.94	PASS	
4625.00†	4540.52	-670.49	490.81	5828.50	5588.54	-2425.71	-4851.52	109.73	5720.11	83.72	68.84	PASS	
4725.00†	4638.37	-687.13	503.00	5916.65	5671.82	-2397.72	-4844.38	110.14	5708.64	84.87	67.77	PASS	
4825.00†	4736.22	-703.78	515.18	6004.80	5755.11	-2369.73	-4837.24	110.55	5697.53	86.03	66.72	PASS	
4925.00†	4834.07	-720.42	527.36	6092.95	5838.39	-2341.74	-4830.09	110.97	5686.80	87.20	65.70	PASS	
5025.00†	4931.92	-737.07	539.55	6181.09	5921.67	-2313.75	-4822.95	111.38	5676.44	88.38	64.70	PASS	
5125.00†	5029.77	-753.71	551.73	6269.24	6004.95	-2285.75	-4815.81	111.80	5666.45	89.57	63.71	PASS	
5225.00†	5127.62	-770.35	563.91	6357.39	6088.23	-2257.76	-4808.67	112.21	5656.84	90.78	62.76	PASS	
5325.00†	5225.47	-787.00	576.10	6445.54	6171.50	-2229.77	-4801.53	112.63	5647.61	91.99	61.82	PASS	
5425.00†	5323.32	-803.64	588.28	6533.69	6254.79	-2201.78	-4794.39	113.05	5638.76	93.22	60.91	PASS	
5525.00†	5421.17	-820.28	600.47	6621.94	6338.08	-2173.79	-4787.24	113.47	5630.33	94.45	60.00	PASS	
5625.00†	5519.02	-836.93	612.65	6710.19	6422.37	-2145.80	-4780.09	113.89	5622.50	95.68	59.10	PASS	
5725.00†	5616.87	-853.57	624.83	6798.44	6506.66	-2117.81	-4772.94	114.31	5615.21	96.91	58.20	PASS	
5825.00†	5714.72	-870.22	637.02	6886.69	6592.95	-2089.82	-4765.79	114.73	5608.06	98.14	57.30	PASS	
5925.00†	5812.57	-886.86	649.20	6974.94	6679.24	-2061.83	-4758.64	115.15	5601.21	99.37	56.40	PASS	
6025.00†	5910.42	-903.50	661.38	7063.19	6765.53	-2033.84	-4751.49	115.57	5594.36	100.60	55.50	PASS	
6125.00†	6008.27	-920.15	673.57	7151.44	6851.82	-2005.85	-4744.34	116.00	5587.51	101.83	54.60	PASS	
6225.00†	6106.12	-936.79	685.75	7239.69	6938.11	-1977.86	-4737.19	116.42	5580.66	103.06	53.70	PASS	
6325.00†	6203.97	-953.43	697.93	7327.94	7024.40	-1949.87	-4730.04	116.84	5573.81	104.29	52.80	PASS	
6425.00†	6301.82	-970.08	710.12	7416.19	7110.69	-1921.88	-4722.89	117.26	5566.96	105.52	51.90	PASS	
6525.00†	6399.66	-986.72	722.30	7504.44	7196.98	-1893.89	-4715.74	117.68	5560.11	106.75	51.00	PASS	
6605.93	6478.85	-1000.19	732.16	7592.69	7283.27	-1865.90	-4708.59	118.10	5553.26	107.98	50.10	PASS	
6625.00†	6497.54	-1003.38	734.20	7680.94	7369.56	-1837.91	-4701.44	118.52	5546.41	109.21	49.20	PASS	
6725.00†	6595.97	-1020.39	735.57	7769.19	7455.85	-1809.92	-4694.29	118.94	5539.56	110.44	48.30	PASS	
6825.00†	6693.34	-1037.59	721.30	7857.44	7542.14	-1781.93	-4687.14	119.36	5532.71	111.67	47.40	PASS	
6925.00†	6787.24	-1054.57	691.74	7945.69	7628.43	-1753.94	-4680.00	119.78	5525.86	112.90	46.50	PASS	
7025.00†	6875.37	-1070.91	647.62	8033.94	7714.72	-1725.95	-4672.85	120.20	5519.01	114.13	45.60	PASS	
7125.00†	6955.55	-1086.20	590.03	8122.19	7801.01	-1697.96	-4665.70	120.62	5512.16	115.36	44.70	PASS	
7225.00†	7025.81	-1100.06	520.38	8210.44	7887.30	-1669.97	-4658.55	121.04	5505.31	116.59	43.80	PASS	
7325.00†	7084.42	-1112.16	440.40	8298.69	7973.59	-1641.98	-4651.40	121.46	5498.46	117.82	42.90	PASS	
7425.00†	7129.94	-1122.20	352.04	8386.94	8059.88	-1613.99	-4644.25	121.88	5491.61	119.05	42.00	PASS	
7525.00†	7161.25	-1129.93	257.49	8475.19	8146.17	-1586.00	-4637.10	122.30	5484.76	120.28	41.10	PASS	
7625.00†	7177.57	-1135.16	159.08	8563.44	8232.46	-1558.01	-4630.00	122.72	5477.91	121.51	40.20	PASS	
7682.94	7180.00	-1136.99	101.24	8651.69	8318.75	-1530.02	-4622.85	123.14	5471.06	122.74	39.30	PASS	
7725.00†	7179.88	-1138.00	59.19	8739.94	8405.04	-1502.03	-4615.70	123.56	5464.21	123.97	38.40	PASS	
7825.00†	7179.59	-1140.39	-40.78	8828.19	8491.33	-1474.04	-4608.55	123.98	5457.36	125.20	37.50	PASS	
7925.00†	7179.29	-1142.78	-140.75	8916.44	8577.62	-1446.05	-4601.40	124.40	5450.51	126.43	36.60	PASS	
8025.00†	7179.00	-1145.17	-240.72	9004.69	8663.91	-1418.06	-4594.25	124.82	5443.66	127.66	35.70	PASS	
8125.00†	7178.71	-1147.56	-340.69	9092.94	8750.20	-1389.97	-4587.10	125.24	5436.81	128.89	34.80	PASS	
8225.00†	7178.42	-1149.95	-440.66	9181.19	8836.49	-1361.98	-4580.00	125.66	5430.00	130.12	33.90	PASS	
8325.00†	7178.13	-1152.34	-540.63	9269.44	8922.78	-1333.99	-4572.85	126.08	5423.15	131.35	33.00	PASS	
8425.00†	7177.84	-1154.73	-640.61	9357.69	9009.07	-1306.00	-4565.70	126.50	5416.30	132.58	32.10	PASS	
8525.00†	7177.55	-1157.12	-740.58	9445.94	9095.36	-1278.01	-4558.55	126.92	5409.45	133.81	31.20	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 72 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: WARD M-20-19HN PWB Offset Wellpath: WARD M-20-19HN PWP

Facility: SEC.20-T06N-R66W Slot: SLOT#03 WARD #M-20-19HN Well: WARD M-20-19HN Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
8625.00†	7177.25	-1159.52	-840.55	6768.52	6476.00	-2128.24	-4812.00	-51.71	4147.60	107.05	38.97	PASS	
8725.00†	7176.96	-1161.91	-940.52	6771.96	6479.18	-2127.20	-4812.82	-51.80	4051.35	107.34	37.97	PASS	
8825.00†	7176.67	-1164.30	-1040.49	6775.55	6482.48	-2126.11	-4813.70	-51.90	3955.26	107.68	36.95	PASS	
8925.00†	7176.38	-1166.69	-1140.46	6779.29	6485.92	-2124.99	-4814.63	-52.01	3859.35	108.09	35.91	PASS	
9025.00†	7176.09	-1169.08	-1240.43	6783.19	6489.52	-2123.81	-4815.62	-52.12	3763.62	108.57	34.87	PASS	
9125.00†	7175.80	-1171.47	-1340.40	6787.27	6493.26	-2122.58	-4816.68	-52.23	3668.10	109.11	33.81	PASS	
9225.00†	7175.51	-1173.86	-1440.37	6791.54	6497.17	-2121.30	-4817.81	-52.35	3572.79	109.73	32.75	PASS	
9325.00†	7175.21	-1176.25	-1540.34	6796.01	6501.25	-2119.96	-4819.02	-52.48	3477.72	110.42	31.67	PASS	
9425.00†	7174.92	-1178.64	-1640.32	6800.68	6505.53	-2118.56	-4820.32	-52.61	3382.89	111.21	30.59	PASS	
9525.00†	7174.63	-1181.03	-1740.29	6805.59	6510.00	-2117.10	-4821.71	-52.75	3288.33	112.11	29.49	PASS	
9625.00†	7174.34	-1183.42	-1840.26	6810.74	6514.69	-2115.57	-4823.20	-52.90	3194.06	113.11	28.39	PASS	
9725.00†	7174.05	-1185.82	-1940.23	6816.16	6519.60	-2113.96	-4824.81	-53.05	3100.10	114.23	27.29	PASS	
9825.00†	7173.76	-1188.21	-2040.20	6821.86	6524.76	-2112.28	-4826.55	-53.22	3006.47	115.46	26.18	PASS	
9925.00†	7173.47	-1190.60	-2140.17	6827.86	6530.18	-2110.51	-4828.43	-53.40	2913.21	116.83	25.07	PASS	
10025.00†	7173.17	-1192.99	-2240.14	6834.20	6535.89	-2108.64	-4830.46	-53.58	2820.34	118.33	23.96	PASS	
10125.00†	7172.88	-1195.38	-2340.11	6840.89	6541.89	-2106.69	-4832.66	-53.78	2727.90	120.00	22.85	PASS	
10225.00†	7172.59	-1197.77	-2440.08	6847.96	6548.22	-2104.63	-4835.06	-53.99	2635.93	121.83	21.75	PASS	
10325.00†	7172.30	-1200.16	-2540.05	6855.46	6554.90	-2102.45	-4837.66	-54.21	2544.47	123.85	20.65	PASS	
10425.00†	7172.01	-1202.55	-2640.03	6863.41	6561.96	-2100.16	-4840.51	-54.45	2453.56	126.06	19.56	PASS	
10525.00†	7171.72	-1204.94	-2740.00	6871.85	6569.43	-2097.73	-4843.62	-54.71	2363.27	128.49	18.48	PASS	
10625.00†	7171.42	-1207.33	-2839.97	6880.84	6577.34	-2095.16	-4847.04	-54.99	2273.65	131.16	17.42	PASS	
10725.00†	7171.13	-1209.72	-2939.94	6890.42	6585.72	-2092.45	-4850.79	-55.28	2184.78	134.08	16.37	PASS	
10825.00†	7170.84	-1212.11	-3039.91	6900.65	6594.62	-2089.57	-4854.93	-55.60	2096.72	137.27	15.34	PASS	
10925.00†	7170.55	-1214.51	-3139.88	6911.58	6604.07	-2086.51	-4859.50	-55.95	2009.57	140.78	14.34	PASS	
11025.00†	7170.26	-1216.90	-3239.85	6923.30	6614.13	-2083.26	-4864.56	-56.32	1923.42	144.61	13.36	PASS	
11125.00†	7169.97	-1219.29	-3339.82	6935.88	6624.84	-2079.81	-4870.19	-56.72	1838.40	148.80	12.40	PASS	
11225.00†	7169.68	-1221.68	-3439.79	6949.42	6636.25	-2076.13	-4876.47	-57.16	1754.62	153.38	11.48	PASS	
11325.00†	7169.38	-1224.07	-3539.76	6964.01	6648.43	-2072.22	-4883.49	-57.64	1672.23	158.38	10.60	PASS	
11425.00†	7169.09	-1226.46	-3639.74	6979.77	6661.43	-2068.05	-4891.36	-58.16	1591.41	163.84	9.75	PASS	
11525.00†	7168.80	-1228.85	-3739.71	6996.83	6675.32	-2063.61	-4900.22	-58.73	1512.33	169.79	8.94	PASS	
11625.00†	7168.51	-1231.24	-3839.68	7015.34	6690.16	-2058.87	-4910.22	-59.35	1435.22	176.28	8.17	PASS	
11725.00†	7168.22	-1233.63	-3939.65	7035.46	6706.01	-2053.83	-4921.55	-60.03	1360.33	183.33	7.44	PASS	
11825.00†	7167.93	-1236.02	-4039.62	7057.38	6722.92	-2048.47	-4934.40	-60.78	1287.92	190.98	6.76	PASS	
11925.00†	7167.64	-1238.41	-4139.59	7081.29	6740.94	-2042.77	-4949.05	-61.60	1218.31	199.23	6.13	PASS	
12025.00†	7167.34	-1240.81	-4239.56	7107.41	6760.10	-2036.74	-4965.75	-62.51	1151.83	208.11	5.55	PASS	
12125.00†	7167.05	-1243.20	-4339.53	7136.00	6780.38	-2030.39	-4984.86	-63.50	1088.87	217.60	5.02	PASS	
12225.00†	7166.76	-1245.59	-4439.50	7167.30	6801.76	-2023.73	-5006.74	-64.58	1029.81	227.66	4.53	PASS	
12325.00†	7166.47	-1247.98	-4539.47	7201.61	6824.12	-2016.82	-5031.82	-65.76	975.05	238.20	4.10	PASS	
12425.00†	7166.18	-1250.37	-4639.45	7239.21	6847.30	-2009.71	-5060.56	-67.02	925.00	249.13	3.72	PASS	
12525.00†	7165.89	-1252.76	-4739.42	7280.34	6870.98	-2002.52	-5093.40	-68.37	880.01	260.24	3.39	PASS	
12625.00†	7165.60	-1255.15	-4839.39	7325.17	6894.72	-1995.42	-5130.75	-69.78	840.39	271.36	3.10	PASS	
12725.00†	7165.30	-1257.54	-4939.36	7373.86	6917.96	-1988.59	-5172.98	-71.22	806.34	282.21	2.86	PASS	
12825.00†	7165.01	-1259.93	-5039.33	7426.40	6939.92	-1982.30	-5220.28	-72.63	777.96	292.57	2.66	PASS	
12925.00†	7164.72	-1262.32	-5139.30	7482.65	6959.74	-1976.84	-5272.62	-73.95	755.20	302.21	2.50	PASS	
13025.00†	7164.43	-1264.71	-5239.27	7542.28	6976.44	-1972.53	-5329.68	-75.10	737.91	310.99	2.38	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 73 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: WARD M-20-19HN PWB Offset Wellpath: WARD M-20-19HN PWP

Facility: SEC.20-T06N-R66W Slot: SLOT#03 WARD #M-20-19HN Well: WARD M-20-19HN Threshold Value=1.00 † = interpolated/extrapolated station												
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status
13125.00†	7164.14	-1267.10	-5339.24	7604.69	6989.05	-1969.67	-5390.72	-75.99	725.89	318.77	2.28	PASS
13225.00†	7163.85	-1269.50	-5439.21	7669.03	6996.72	-1968.53	-5454.57	-76.55	718.90	325.55	2.21	PASS
13325.00†	7163.56	-1271.89	-5539.18	7736.64	6998.93	-1969.30	-5522.11	-76.72	716.78	331.26	2.17	PASS
13425.00†	7163.26	-1274.28	-5639.16	7836.64	6998.53	-1971.65	-5622.09	-76.71	716.77	337.32	2.13	PASS
13525.00†	7162.97	-1276.67	-5739.13	7936.64	6998.12	-1974.00	-5722.06	-76.70	716.76	343.55	2.09	PASS
13625.00†	7162.68	-1279.06	-5839.10	8036.64	6997.72	-1976.35	-5822.03	-76.69	716.74	350.01	2.05	PASS
13725.00†	7162.39	-1281.45	-5939.07	8136.64	6997.32	-1978.70	-5922.00	-76.69	716.73	356.68	2.01	PASS
13825.00†	7162.10	-1283.84	-6039.04	8236.64	6996.92	-1981.06	-6021.97	-76.68	716.72	363.52	1.97	PASS
13925.00†	7161.81	-1286.23	-6139.01	8336.64	6996.52	-1983.41	-6121.94	-76.67	716.71	370.53	1.94	PASS
14025.00†	7161.51	-1288.62	-6238.98	8436.64	6996.12	-1985.76	-6221.91	-76.66	716.69	377.68	1.90	PASS
14032.94	7161.49	-1288.81	-6246.92	8444.58	6996.09	-1985.95	-6229.85	-76.66	716.69	378.25	1.90	PASS
14125.00†	7161.22	-1288.79	-6338.97	8536.61	6995.72	-1988.11	-6321.85	-76.67	718.84	385.03	1.87	PASS
14211.94	7160.97	-1284.71	-6425.81	8623.32	6995.37	-1990.15	-6408.54	-76.72	724.83	391.65	1.85	PASS
14225.00†	7160.93	-1283.79	-6438.83	8636.33	6995.32	-1990.46	-6421.54	-76.74	726.02	392.65	1.85	PASS
14325.00†	7160.64	-1276.82	-6538.59	8735.89	6994.92	-1992.80	-6521.08	-76.90	735.12	400.42	1.84	PASS
14411.94	7160.39	-1270.75	-6625.32	8822.45	6994.57	-1994.84	-6607.62	-77.04	743.04	407.24	1.83	PASS
14425.00†	7160.35	-1269.89	-6638.35	8835.46	6994.52	-1995.14	-6620.62	-77.06	744.18	408.27	1.82	PASS
14525.00†	7160.06	-1266.21	-6738.27	8935.27	6994.12	-1997.49	-6720.40	-77.21	750.08	416.11	1.80	PASS
14625.00†	7159.76	-1267.77	-6838.25	9035.25	6993.71	-1999.84	-6820.35	-77.22	750.88	423.87	1.77	PASS
14725.00†	7159.47	-1274.55	-6938.00	9135.14	6993.31	-2002.19	-6920.22	-77.12	746.58	431.49	1.73	PASS
14825.00†	7159.17	-1286.55	-7037.27	9234.66	6992.91	-2004.53	-7019.71	-76.89	737.19	438.92	1.68	PASS
14925.00†	7158.88	-1303.73	-7135.77	9333.54	6992.52	-2006.86	-7118.56	-76.52	722.75	446.10	1.62	PASS
14937.60	7158.84	-1306.26	-7148.12	9345.95	6992.47	-2007.15	-7130.96	-76.47	720.57	446.98	1.61	PASS
15025.00†	7158.59	-1324.09	-7233.68	9431.90	6992.12	-2009.17	-7216.89	-76.16	705.22	453.06	1.56	PASS
15037.60	7158.55	-1326.66	-7246.02	9444.30	6992.07	-2009.46	-7229.28	-76.11	703.01	453.94	1.55	PASS
15125.00†	7158.30	-1342.52	-7331.95	9530.58	6991.73	-2011.49	-7315.54	-75.92	689.59	460.12	1.50	PASS
15225.00†	7158.01	-1355.83	-7431.05	9629.97	6991.33	-2013.83	-7414.90	-75.76	678.98	467.49	1.45	PASS
15325.00†	7157.72	-1363.93	-7530.71	9729.79	6990.93	-2016.18	-7514.69	-75.66	673.43	475.18	1.42	PASS
15382.89†	7157.55	-1366.23	-7588.55	9787.50	6990.70	-2017.53	-7572.39	-75.64	672.53	479.75	1.40	PASS
15417.62	7157.45	-1366.77	-7623.28	9822.40	6990.56	-2018.36	-7607.27	-75.63	672.81	482.56	1.39	PASS
15425.00†	7157.43	-1366.82	-7630.66	9829.78	6990.53	-2018.53	-7614.65	-75.64	672.93	483.16	1.39	PASS
15525.00†	7157.14	-1367.46	-7730.65	9929.76	6990.12	-2020.88	-7714.61	-75.66	674.61	491.27	1.37	PASS
15625.00†	7156.85	-1368.11	-7830.65	10029.75	6989.72	-2023.23	-7814.57	-75.69	676.30	499.41	1.35	PASS
15725.00†	7156.56	-1368.75	-7930.65	10129.73	6989.32	-2025.58	-7914.52	-75.71	677.98	507.57	1.34	PASS
15825.00†	7156.27	-1369.40	-8030.65	10229.72	6988.92	-2027.94	-8014.48	-75.74	679.66	515.76	1.32	PASS
15925.00†	7155.98	-1370.04	-8130.64	10329.70	6988.52	-2030.29	-8114.44	-75.77	681.34	523.96	1.30	PASS
16025.00†	7155.70	-1370.69	-8230.64	10429.69	6988.12	-2032.64	-8214.39	-75.79	683.03	532.18	1.28	PASS
16125.00†	7155.41	-1371.33	-8330.64	10529.68	6987.72	-2034.99	-8314.35	-75.82	684.71	540.41	1.27	PASS
16225.00†	7155.12	-1371.98	-8430.64	10629.66	6987.31	-2037.34	-8414.31	-75.84	686.39	548.66	1.25	PASS
16325.00†	7154.83	-1372.62	-8530.63	10729.65	6986.91	-2039.69	-8514.26	-75.87	688.08	556.93	1.24	PASS
16425.00†	7154.54	-1373.27	-8630.63	10829.63	6986.51	-2042.05	-8614.22	-75.90	689.76	565.21	1.22	PASS
16525.00†	7154.25	-1373.91	-8730.63	10929.62	6986.11	-2044.40	-8714.18	-75.92	691.44	573.50	1.21	PASS
16625.00†	7153.97	-1374.56	-8830.63	11029.60	6985.71	-2046.75	-8814.13	-75.95	693.13	581.80	1.19	PASS
16725.00†	7153.68	-1375.20	-8930.62	11129.59	6985.31	-2049.10	-8914.09	-75.97	694.81	590.11	1.18	PASS
16825.00†	7153.39	-1375.85	-9030.62	11229.57	6984.91	-2051.45	-9014.05	-76.00	696.49	598.43	1.16	PASS

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 74 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: **WARD M-20-19HN PWB** Offset Wellpath: **WARD M-20-19HN PWP**

Facility: SEC.20-T06N-R66W		Slot: SLO#03 WARD #M-20-19HN		Well: WARD M-20-19HN		Threshold Value=1.00 † = interpolated/extrapolated station						
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status
16925.00†	7153.10	-1376.49	-9130.62	11329.56	6984.50	-2053.81	-9114.01	-76.02	698.18	606.76	1.15	PASS
17025.00†	7152.81	-1377.14	-9230.62	11429.54	6984.10	-2056.16	-9213.96	-76.05	699.86	615.11	1.14	PASS
17125.00†	7152.52	-1377.78	-9330.61	11529.53	6983.70	-2058.51	-9313.92	-76.07	701.55	623.46	1.13	PASS
17225.00†	7152.24	-1378.43	-9430.61	11629.52	6983.30	-2060.86	-9413.88	-76.10	703.23	631.81	1.11	PASS
17325.00†	7151.95	-1379.07	-9530.61	11729.50	6982.90	-2063.21	-9513.83	-76.12	704.92	640.18	1.10	PASS
17425.00†	7151.66	-1379.72	-9630.61	11829.49	6982.50	-2065.56	-9613.79	-76.14	706.60	648.55	1.09	PASS
17525.00†	7151.37	-1380.36	-9730.60	11929.47	6982.10	-2067.92	-9713.75	-76.17	708.28	656.93	1.08	PASS
17625.00†	7151.08	-1381.01	-9830.60	12029.46	6981.70	-2070.27	-9813.70	-76.19	709.97	665.31	1.07	PASS
17725.00†	7150.79	-1381.65	-9930.60	12129.44	6981.29	-2072.62	-9913.66	-76.22	711.65	673.70	1.06	PASS
17825.00†	7150.51	-1382.30	-10030.60	12229.43	6980.89	-2074.97	-10013.62	-76.24	713.34	682.10	1.05	PASS
17925.00†	7150.22	-1382.94	-10130.59	12329.41	6980.49	-2077.32	-10113.57	-76.26	715.03	690.51	1.04	PASS
18000.13†	7150.00	-1383.43	-10205.72	12404.53	6980.19	-2079.09	-10188.67	-76.28	716.29	696.82	1.03	PASS

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: **WARD M-20-19HN PWB** Offset Wellpath: **WARD M-20-19HN PWP**

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: **WARD M-20-19HN PWB** Offset Wellpath: **WARD M-20-19HN PWP**

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
7in Casing	23.00	7806.00	7783.00	45.00	6996.65	-2445.62	-3204.51	-1823.36	-3306.53

WELLPATH COMPOSITION - Offset Wellbore: **WARD M-20-19HN PWB** Offset Wellpath: **WARD M-20-19HN PWP**

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
0.00	17951.80	ISWWSA MWD, Rev. 4 (Standard)	NOT ACTUAL SURVEYS (PLANNED WELLBORE FOR CLEARANCE WITH SYNERGY HOOD PAD)	WARD M-20-19HN PWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: **WARD M-20-19HN PWB** Offset Wellpath: **WARD M-20-19HN PWP**

MD Reference: 23' FROM ENSIGN PLANS (RKB)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	23.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 75 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: WARD #N-20-19HC PWB Offset Wellpath: WARD #N-20-19HC PWP

Facility: SEC.20-T06N-R66W				Slot: SLOT#04 WARD #N-20-19HC		Well: WARD #N-20-19HC		Threshold Value=1.00 † = interpolated/extrapolated station				
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status
25.00	25.00	0.00	0.00	1.00	25.00	-4027.28	-5256.33	-127.46	6621.78	25.46	269.12	PASS
125.00†	125.00	0.00	0.00	101.00	125.00	-4027.28	-5256.33	-127.46	6621.78	31.68	214.82	PASS
225.00†	225.00	0.00	0.00	1853.09	1845.19	-3772.00	-5186.05	-126.03	6614.23	50.73	132.61	PASS
300.00	300.00	0.00	0.00	1924.46	1913.09	-3750.84	-5180.22	-125.91	6595.88	50.94	131.69	PASS
325.00†	325.00	-0.09	0.06	1948.23	1935.71	-3743.80	-5178.28	90.47	6589.76	51.01	131.37	PASS
425.00†	424.96	-2.20	1.61	2042.84	2025.74	-3715.74	-5170.56	91.16	6565.38	51.31	130.10	PASS
525.00†	524.77	-7.13	5.22	2136.65	2115.00	-3687.93	-5162.90	91.87	6541.15	51.64	128.79	PASS
625.00†	624.30	-14.86	10.88	2229.53	2203.38	-3660.39	-5155.32	92.61	6517.13	51.98	127.46	PASS
725.00†	723.44	-25.39	18.59	2321.37	2290.77	-3633.16	-5147.82	93.37	6493.41	52.34	126.10	PASS
825.00†	822.07	-38.71	28.34	2412.06	2377.07	-3606.27	-5140.42	94.14	6470.05	52.73	124.72	PASS
895.18	890.91	-49.71	36.39	2474.96	2436.92	-3587.82	-5135.29	94.70	6453.93	53.00	123.74	PASS
925.00†	920.09	-54.67	40.02	2501.55	2462.22	-3579.74	-5133.12	94.80	6447.14	53.12	123.33	PASS
1025.00†	1017.94	-71.32	52.20	2590.72	2547.07	-3553.30	-5125.84	95.12	6424.53	53.55	121.91	PASS
1125.00†	1115.79	-87.96	64.39	2679.89	2631.92	-3526.86	-5118.56	95.45	6402.16	53.99	120.47	PASS
1225.00†	1213.64	-104.60	76.57	2769.06	2716.76	-3500.43	-5111.28	95.79	6380.03	54.45	119.02	PASS
1325.00†	1311.48	-121.25	88.76	2858.22	2801.61	-3473.99	-5104.00	96.12	6358.15	54.93	117.56	PASS
1425.00†	1409.33	-137.89	100.94	2947.39	2886.46	-3447.55	-5096.73	96.45	6336.52	55.43	116.08	PASS
1525.00†	1507.18	-154.53	113.12	3036.56	2971.30	-3421.11	-5089.45	96.79	6315.13	55.95	114.60	PASS
1625.00†	1605.03	-171.18	125.31	3125.73	3056.15	-3394.68	-5082.17	97.13	6294.00	56.49	113.11	PASS
1725.00†	1702.88	-187.82	137.49	3214.89	3141.00	-3368.24	-5074.89	97.47	6273.13	57.05	111.62	PASS
1825.00†	1800.73	-204.47	149.67	3304.06	3225.84	-3341.80	-5067.61	97.82	6252.51	57.38	110.20	PASS
1925.00†	1898.58	-221.11	161.86	3393.23	3310.69	-3315.36	-5060.33	98.16	6232.15	57.91	108.81	PASS
2025.00†	1996.43	-237.75	174.04	3482.40	3395.54	-3288.93	-5053.06	98.51	6212.06	58.47	107.41	PASS
2125.00†	2094.28	-254.40	186.22	3571.56	3480.38	-3262.49	-5045.78	98.86	6192.23	59.06	105.99	PASS
2225.00†	2192.13	-271.04	198.41	3660.73	3565.23	-3236.05	-5038.50	99.21	6172.67	59.67	104.57	PASS
2325.00†	2289.98	-287.68	210.59	3749.90	3650.08	-3209.61	-5031.22	99.56	6153.38	60.30	103.13	PASS
2425.00†	2387.83	-304.33	222.77	3839.07	3734.92	-3183.18	-5023.94	99.92	6134.37	60.96	101.69	PASS
2525.00†	2485.68	-320.97	234.96	3928.24	3819.77	-3156.74	-5016.66	100.27	6115.63	61.65	100.25	PASS
2625.00†	2583.53	-337.62	247.14	4017.40	3904.62	-3130.30	-5009.39	100.63	6097.17	62.35	98.80	PASS
2725.00†	2681.38	-354.26	259.33	4106.57	3989.46	-3103.86	-5002.11	100.99	6078.99	63.08	97.36	PASS
2825.00†	2779.23	-370.90	271.51	4195.74	4074.31	-3077.42	-4994.83	101.35	6061.09	63.83	95.92	PASS
2925.00†	2877.08	-387.55	283.69	4284.91	4159.16	-3050.99	-4987.55	101.71	6043.48	64.60	94.49	PASS
3025.00†	2974.93	-404.19	295.88	4374.07	4244.00	-3024.55	-4980.27	102.08	6026.16	65.39	93.06	PASS
3125.00†	3072.78	-420.83	308.06	4463.24	4328.85	-2998.11	-4973.00	102.45	6009.13	66.21	91.64	PASS
3225.00†	3170.63	-437.48	320.24	4552.41	4413.70	-2971.68	-4965.72	102.81	5992.39	67.04	90.24	PASS
3325.00†	3268.48	-454.12	332.43	4641.58	4498.54	-2945.24	-4958.44	103.18	5975.95	67.90	88.85	PASS
3425.00†	3366.33	-470.77	344.61	4730.74	4583.39	-2918.80	-4951.16	103.56	5959.81	68.77	87.47	PASS
3525.00†	3464.18	-487.41	356.79	4819.91	4668.24	-2892.36	-4943.88	103.93	5943.97	69.67	86.11	PASS
3625.00†	3562.03	-504.05	368.98	4909.08	4753.08	-2865.93	-4936.60	104.30	5928.43	70.58	84.76	PASS
3725.00†	3659.88	-520.70	381.16	4998.25	4837.93	-2839.49	-4929.33	104.68	5913.19	71.51	83.43	PASS
3825.00†	3757.73	-537.34	393.34	5087.42	4922.78	-2813.05	-4922.05	105.06	5898.27	72.46	82.12	PASS
3925.00†	3855.57	-553.98	405.53	5176.58	5007.62	-2786.61	-4914.77	105.44	5883.66	73.43	80.83	PASS
4025.00†	3953.42	-570.63	417.71	5265.75	5092.47	-2760.17	-4907.49	105.82	5869.35	74.41	79.56	PASS
4125.00†	4051.27	-587.27	429.90	5354.92	5177.31	-2733.74	-4900.21	106.20	5855.37	75.41	78.31	PASS
4225.00†	4149.12	-603.92	442.08	5444.08	5262.16	-2707.30	-4892.93	106.59	5841.70	76.42	77.08	PASS

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 76 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: WARD #N-20-19HC PWB Offset Wellpath: WARD #N-20-19HC PWP

Facility: SEC.20-T06N-R66W Slot: SLOT#04 WARD #N-20-19HC Well: WARD #N-20-19HC Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
4325.00†	4246.97	-620.56	454.26	5533.25	5347.01	-2680.86	-4885.66	106.97	5828.35	77.45	75.87	PASS	
4425.00†	4344.82	-637.20	466.45	5622.42	5431.86	-2654.43	-4878.38	107.36	5815.32	78.50	74.69	PASS	
4525.00†	4442.67	-653.85	478.63	5711.59	5516.70	-2627.99	-4871.10	107.75	5802.62	79.56	73.52	PASS	
4625.00†	4540.52	-670.49	490.81	5800.76	5601.55	-2601.55	-4863.82	108.14	5790.24	80.63	72.38	PASS	
4725.00†	4638.37	-687.13	503.00	5889.93	5686.40	-2575.11	-4856.54	108.53	5778.19	81.72	71.26	PASS	
4825.00†	4736.22	-703.78	515.18	5979.09	5771.24	-2548.67	-4849.27	108.92	5766.47	82.82	70.17	PASS	
4925.00†	4834.07	-720.42	527.36	6068.26	5856.09	-2522.24	-4841.99	109.32	5755.08	83.93	69.09	PASS	
5025.00†	4931.92	-737.07	539.55	6157.43	5940.94	-2495.80	-4834.71	109.71	5744.03	85.06	68.04	PASS	
5125.00†	5029.77	-753.71	551.73	6246.59	6025.78	-2469.36	-4827.43	110.11	5733.31	86.20	67.01	PASS	
5225.00†	5127.62	-770.35	563.91	6335.76	6110.63	-2442.93	-4820.15	110.50	5722.93	87.35	66.00	PASS	
5325.00†	5225.47	-787.00	576.10	6424.93	6195.48	-2416.49	-4812.87	110.90	5712.90	88.51	65.01	PASS	
5425.00†	5323.32	-803.64	588.28	6514.10	6280.32	-2390.05	-4805.60	111.30	5703.20	89.68	64.06	PASS	
5525.00†	5421.17	-820.28	600.47	6603.26	6365.17	-2363.61	-4798.32	111.70	5693.84	90.86	63.11	PASS	
5625.00†	5519.02	-836.93	612.65	6692.41	6450.00	-2336.17	-4791.04	112.10	5684.48	92.04	62.16	PASS	
5725.00†	5616.87	-853.57	624.83	6781.56	6534.83	-2308.72	-4783.76	112.50	5675.12	93.22	61.21	PASS	
5825.00†	5714.72	-870.22	637.02	6870.71	6619.66	-2281.28	-4776.48	112.90	5665.76	94.40	60.26	PASS	
5925.00†	5812.57	-886.86	649.20	6960.25	6704.49	-2253.83	-4769.20	113.30	5656.40	95.58	59.31	PASS	
6025.00†	5910.42	-903.50	661.38	7049.79	6789.32	-2226.38	-4761.92	113.70	5647.04	96.76	58.36	PASS	
6125.00†	6008.27	-920.15	673.57	7139.33	6874.15	-2198.93	-4754.64	114.10	5637.68	97.94	57.41	PASS	
6225.00†	6106.12	-936.79	685.75	7228.87	6958.98	-2171.48	-4747.36	114.50	5628.32	99.12	56.46	PASS	
6325.00†	6203.97	-953.43	697.93	7318.41	7043.81	-2144.03	-4740.08	114.90	5618.96	100.30	55.51	PASS	
6425.00†	6301.82	-970.08	710.12	7407.95	7128.64	-2116.58	-4732.80	115.30	5609.60	101.48	54.56	PASS	
6525.00†	6399.66	-986.72	722.30	7497.49	7213.47	-2089.13	-4725.52	115.70	5600.24	102.66	53.61	PASS	
6605.93	6478.85	-1000.19	732.16	7587.03	7298.30	-2061.68	-4718.24	116.10	5590.88	103.84	52.66	PASS	
6625.00†	6497.54	-1003.38	734.20	7676.57	7383.13	-2034.23	-4710.96	116.50	5581.52	105.02	51.71	PASS	
6725.00†	6595.39	-1020.39	735.57	7766.11	7467.96	-2006.78	-4703.68	116.90	5572.16	106.20	50.76	PASS	
6825.00†	6693.34	-1037.59	721.30	7855.65	7552.79	-1979.33	-4696.40	117.30	5562.80	107.38	49.81	PASS	
6925.00†	6787.24	-1054.57	691.74	7945.19	7637.62	-1951.88	-4689.12	117.70	5553.44	108.56	48.86	PASS	
7025.00†	6875.37	-1070.91	647.62	8034.73	7722.45	-1924.43	-4681.84	118.10	5544.08	109.74	47.91	PASS	
7125.00†	6955.55	-1086.20	590.03	8124.27	7807.28	-1896.98	-4674.56	118.50	5534.72	110.92	46.96	PASS	
7225.00†	7025.81	-1100.06	520.38	8213.81	7892.11	-1869.53	-4667.28	118.90	5525.36	112.10	46.01	PASS	
7325.00†	7084.42	-1112.16	440.40	8303.35	7976.94	-1842.08	-4660.00	119.30	5516.00	113.28	45.06	PASS	
7425.00†	7129.94	-1122.20	352.04	8392.89	8061.77	-1814.63	-4652.72	119.70	5506.64	114.46	44.11	PASS	
7525.00†	7161.25	-1129.93	257.49	8482.43	8146.60	-1787.18	-4645.44	120.10	5497.28	115.64	43.16	PASS	
7625.00†	7177.57	-1135.16	159.08	8571.97	8231.43	-1759.73	-4638.16	120.50	5487.92	116.82	42.21	PASS	
7682.94	7180.00	-1136.99	101.24	8661.51	8316.26	-1732.28	-4630.88	120.90	5478.56	118.00	41.26	PASS	
7725.00†	7179.88	-1138.00	59.19	8751.05	8401.09	-1704.83	-4623.60	121.30	5469.20	119.18	40.31	PASS	
7825.00†	7179.59	-1140.39	-40.78	8840.59	8485.92	-1677.38	-4616.32	121.70	5459.84	120.36	39.36	PASS	
7925.00†	7179.29	-1142.78	-140.75	8930.13	8570.75	-1649.93	-4609.04	122.10	5450.48	121.54	38.41	PASS	
8025.00†	7179.00	-1145.17	-240.72	9019.67	8655.58	-1622.48	-4601.76	122.50	5441.12	122.72	37.46	PASS	
8125.00†	7178.71	-1147.56	-340.69	9109.21	8740.41	-1595.03	-4594.48	122.90	5431.76	123.90	36.51	PASS	
8225.00†	7178.42	-1149.95	-440.66	9198.75	8825.24	-1567.58	-4587.20	123.30	5422.40	125.08	35.56	PASS	
8325.00†	7178.13	-1152.34	-540.63	9288.29	8910.07	-1540.13	-4579.92	123.70	5413.04	126.26	34.61	PASS	
8425.00†	7177.84	-1154.73	-640.61	9377.83	8994.90	-1512.68	-4572.64	124.10	5403.68	127.44	33.66	PASS	
8525.00†	7177.55	-1157.12	-740.58	9467.37	9079.73	-1485.23	-4565.36	124.50	5394.32	128.62	32.71	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 77 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: WARD #N-20-19HC PWB Offset Wellpath: WARD #N-20-19HC PWP

Facility: SEC.20-T06N-R66W Slot: SLOT#04 WARD #N-20-19HC Well: WARD #N-20-19HC Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
8625.00†	7177.25	-1159.52	-840.55	6867.27	6616.07	-2286.14	-4808.15	-61.95	4162.46	105.21	39.80	PASS	
8725.00†	7176.96	-1161.91	-940.52	6870.37	6618.97	-2285.26	-4808.82	-62.06	4066.57	105.70	38.70	PASS	
8825.00†	7176.67	-1164.30	-1040.49	6873.61	6621.99	-2284.34	-4809.53	-62.17	3970.87	106.25	37.60	PASS	
8925.00†	7176.38	-1166.69	-1140.46	6876.98	6625.13	-2283.38	-4810.28	-62.28	3875.37	106.87	36.48	PASS	
9025.00†	7176.09	-1169.08	-1240.43	6880.51	6628.42	-2282.38	-4811.09	-62.40	3780.08	107.58	35.34	PASS	
9125.00†	7175.80	-1171.47	-1340.40	6884.19	6631.84	-2281.34	-4811.95	-62.53	3685.01	108.37	34.20	PASS	
9225.00†	7175.51	-1173.86	-1440.37	6888.04	6635.42	-2280.25	-4812.87	-62.66	3590.20	109.26	33.05	PASS	
9325.00†	7175.21	-1176.25	-1540.34	6892.08	6639.17	-2279.11	-4813.85	-62.80	3495.64	110.26	31.89	PASS	
9425.00†	7174.92	-1178.64	-1640.32	6896.31	6643.09	-2277.92	-4814.91	-62.95	3401.37	111.36	30.72	PASS	
9525.00†	7174.63	-1181.03	-1740.29	6900.75	6647.19	-2276.68	-4816.04	-63.10	3307.40	112.58	29.54	PASS	
9625.00†	7174.34	-1183.42	-1840.26	6905.41	6651.50	-2275.37	-4817.26	-63.26	3213.76	113.91	28.37	PASS	
9725.00†	7174.05	-1185.82	-1940.23	6910.32	6656.02	-2274.00	-4818.58	-63.43	3120.48	115.37	27.19	PASS	
9825.00†	7173.76	-1188.21	-2040.20	6915.48	6660.78	-2272.56	-4820.00	-63.62	3027.58	116.97	26.02	PASS	
9925.00†	7173.47	-1190.60	-2140.17	6920.93	6665.78	-2271.05	-4821.53	-63.81	2935.10	118.73	24.85	PASS	
10025.00†	7173.17	-1192.99	-2240.14	6926.68	6671.05	-2269.45	-4823.20	-64.01	2843.08	120.63	23.69	PASS	
10125.00†	7172.88	-1195.38	-2340.11	6932.77	6676.61	-2267.77	-4825.01	-64.23	2751.55	122.68	22.54	PASS	
10225.00†	7172.59	-1197.77	-2440.08	6939.21	6682.48	-2266.00	-4826.97	-64.46	2660.56	124.78	21.43	PASS	
10325.00†	7172.30	-1200.16	-2540.05	6946.04	6688.69	-2264.12	-4829.12	-64.70	2570.16	126.15	20.47	PASS	
10425.00†	7172.01	-1202.55	-2640.03	6953.30	6695.26	-2262.14	-4831.47	-64.96	2480.41	132.98	18.74	PASS	
10525.00†	7171.72	-1204.94	-2740.00	6961.02	6702.23	-2260.04	-4834.05	-65.24	2391.38	134.60	17.85	PASS	
10625.00†	7171.42	-1207.33	-2839.97	6969.25	6709.63	-2257.81	-4836.88	-65.54	2303.13	137.67	16.80	PASS	
10725.00†	7171.13	-1209.72	-2939.94	6978.04	6717.50	-2255.45	-4840.00	-65.87	2215.75	141.19	15.76	PASS	
10825.00†	7170.84	-1212.11	-3039.91	6987.44	6725.87	-2252.93	-4843.45	-66.21	2129.33	145.10	14.74	PASS	
10925.00†	7170.55	-1214.51	-3139.88	6997.52	6734.81	-2250.25	-4847.28	-66.59	2043.98	149.37	13.74	PASS	
11025.00†	7170.26	-1216.90	-3239.85	7008.35	6744.35	-2247.39	-4851.54	-66.99	1959.81	154.08	12.77	PASS	
11125.00†	7169.97	-1219.29	-3339.82	7020.01	6754.55	-2244.34	-4856.29	-67.43	1876.96	159.22	11.83	PASS	
11225.00†	7169.68	-1221.68	-3439.79	7032.60	6765.48	-2241.07	-4861.62	-67.90	1795.58	164.79	10.93	PASS	
11325.00†	7169.38	-1224.07	-3539.76	7046.21	6777.20	-2237.58	-4867.60	-68.42	1715.85	170.83	10.08	PASS	
11425.00†	7169.09	-1226.46	-3639.74	7060.97	6789.78	-2233.83	-4874.34	-68.98	1637.97	177.37	9.26	PASS	
11525.00†	7168.80	-1228.85	-3739.71	7077.02	6803.30	-2229.82	-4881.98	-69.60	1562.15	184.43	8.50	PASS	
11625.00†	7168.51	-1231.24	-3839.68	7094.50	6817.85	-2225.51	-4890.67	-70.27	1488.66	192.03	7.78	PASS	
11725.00†	7168.22	-1233.63	-3939.65	7113.60	6833.51	-2220.88	-4900.57	-71.01	1417.76	200.20	7.10	PASS	
11825.00†	7167.93	-1236.02	-4039.62	7134.52	6850.38	-2215.91	-4911.91	-71.82	1349.78	208.93	6.48	PASS	
11925.00†	7167.64	-1238.41	-4139.59	7157.50	6868.53	-2210.58	-4924.96	-72.71	1285.06	218.20	5.90	PASS	
12025.00†	7167.34	-1240.81	-4239.56	7182.80	6888.04	-2204.88	-4940.01	-73.69	1223.96	227.98	5.38	PASS	
12125.00†	7167.05	-1243.20	-4339.53	7210.72	6908.97	-2198.79	-4957.45	-74.76	1166.87	238.19	4.91	PASS	
12225.00†	7166.76	-1245.59	-4439.50	7241.59	6931.35	-2192.31	-4977.70	-75.94	1114.16	248.72	4.49	PASS	
12325.00†	7166.47	-1247.98	-4539.47	7275.77	6955.14	-2185.47	-5001.27	-77.23	1066.21	259.42	4.12	PASS	
12425.00†	7166.18	-1250.37	-4639.45	7313.63	6980.21	-2178.33	-5028.72	-78.63	1023.34	270.11	3.80	PASS	
12525.00†	7165.89	-1252.76	-4739.42	7355.55	7006.32	-2170.96	-5060.67	-80.12	985.78	280.56	3.52	PASS	
12625.00†	7165.60	-1255.15	-4839.39	7401.90	7033.06	-2163.51	-5097.78	-81.69	953.65	290.54	3.29	PASS	
12725.00†	7165.30	-1257.54	-4939.36	7452.94	7059.79	-2156.19	-5140.62	-83.31	926.93	299.91	3.10	PASS	
12825.00†	7165.01	-1259.93	-5039.33	7508.84	7085.66	-2149.28	-5189.68	-84.91	905.45	308.46	2.94	PASS	
12925.00†	7164.72	-1262.32	-5139.30	7569.57	7109.54	-2143.12	-5245.15	-86.43	888.85	316.24	2.81	PASS	
13025.00†	7164.43	-1264.71	-5239.27	7634.78	7130.11	-2138.13	-5306.81	-87.76	876.70	323.26	2.72	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 78 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: WARD #N-20-19HC PWB Offset Wellpath: WARD #N-20-19HC PWP

Facility: SEC.20-T06N-R66W Slot: SLOT#04 WARD #N-20-19HC Well: WARD #N-20-19HC Threshold Value=1.00 † = interpolated/extrapolated station															
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status			
13125.00†	7164.14	-1267.10	-5339.24	7703.79	7145.96	-2134.72	-5373.86	-88.81	868.50	329.69	2.64	PASS			
13225.00†	7163.85	-1269.50	-5439.21	7775.51	7155.83	-2133.25	-5444.85	-89.47	863.81	335.70	2.58	PASS			
13325.00†	7163.56	-1271.89	-5539.18	7849.64	7158.87	-2133.97	-5518.88	-89.69	862.33	341.46	2.53	PASS			
13425.00†	7163.26	-1274.28	-5639.16	7949.64	7158.47	-2136.32	-5618.85	-89.68	862.29	347.67	2.48	PASS			
13525.00†	7162.97	-1276.67	-5739.13	8049.64	7158.07	-2138.67	-5718.83	-89.67	862.26	354.10	2.44	PASS			
13625.00†	7162.68	-1279.06	-5839.10	8149.64	7157.66	-2141.02	-5818.80	-89.67	862.22	360.75	2.39	PASS			
13725.00†	7162.39	-1281.45	-5939.07	8249.64	7157.26	-2143.37	-5918.77	-89.66	862.18	367.61	2.35	PASS			
13825.00†	7162.10	-1283.84	-6039.04	8349.64	7156.86	-2145.73	-6018.74	-89.65	862.14	374.65	2.30	PASS			
13925.00†	7161.81	-1286.23	-6139.01	8449.64	7156.46	-2148.08	-6118.71	-89.65	862.10	381.85	2.26	PASS			
14025.00†	7161.51	-1288.62	-6238.98	8549.64	7156.06	-2150.43	-6218.68	-89.64	862.07	389.20	2.22	PASS			
14032.94	7161.49	-1288.81	-6246.92	8557.58	7156.03	-2150.62	-6226.62	-89.64	862.06	389.79	2.21	PASS			
14125.00†	7161.22	-1288.79	-6338.97	8649.60	7155.66	-2152.78	-6318.62	-89.62	864.25	396.68	2.18	PASS			
14211.94	7160.97	-1284.71	-6425.81	8736.32	7155.31	-2154.82	-6405.31	-89.61	870.38	403.28	2.16	PASS			
14225.00†	7160.93	-1283.79	-6438.83	8749.32	7155.26	-2155.13	-6418.31	-89.61	871.59	404.28	2.16	PASS			
14325.00†	7160.64	-1276.82	-6538.59	8848.89	7154.86	-2157.47	-6517.85	-89.61	880.91	411.96	2.14	PASS			
14411.94	7160.39	-1270.75	-6625.25	8935.45	7154.51	-2159.51	-6604.38	-89.60	889.02	418.71	2.13	PASS			
14425.00†	7160.35	-1269.89	-6638.35	8948.46	7154.46	-2159.81	-6617.39	-89.61	890.19	419.73	2.12	PASS			
14525.00†	7160.06	-1266.21	-6738.27	9048.26	7154.06	-2162.16	-6717.17	-89.61	896.22	427.59	2.10	PASS			
14625.00†	7159.76	-1267.77	-6838.25	9148.25	7153.66	-2164.51	-6817.12	-89.61	897.01	435.51	2.06	PASS			
14725.00†	7159.47	-1274.55	-6938.00	9248.14	7153.25	-2166.86	-6916.98	-89.61	892.58	443.44	2.01	PASS			
14825.00†	7159.17	-1286.55	-7037.27	9347.66	7152.85	-2169.20	-7016.48	-89.61	882.92	451.35	1.96	PASS			
14925.00†	7158.88	-1303.73	-7135.77	9446.54	7152.46	-2171.53	-7115.33	-89.60	868.06	459.19	1.89	PASS			
14937.60	7158.84	-1306.26	-7148.12	9458.94	7152.41	-2171.82	-7127.73	-89.60	865.82	460.17	1.88	PASS			
15025.00†	7158.59	-1324.09	-7233.68	9544.90	7152.06	-2173.84	-7213.66	-89.58	850.02	466.99	1.82	PASS			
15037.60	7158.55	-1326.66	-7246.02	9557.29	7152.01	-2174.13	-7226.05	-89.58	847.74	467.97	1.81	PASS			
15125.00†	7158.30	-1342.52	-7331.95	9643.58	7151.67	-2176.16	-7312.31	-89.56	833.90	474.87	1.76	PASS			
15225.00†	7158.01	-1355.83	-7431.05	9742.96	7151.27	-2178.50	-7411.67	-89.54	822.93	482.92	1.71	PASS			
15325.00†	7157.72	-1363.93	-7530.71	9842.79	7150.87	-2180.85	-7511.46	-89.53	817.17	491.09	1.66	PASS			
15385.78†	7157.54	-1366.30	-7591.44	9903.12	7150.62	-2182.27	-7571.78	-89.51	816.23	496.07	1.65	PASS			
15417.62	7157.45	-1366.77	-7623.28	9935.39	7150.50	-2183.03	-7604.04	-89.51	816.51	498.73	1.64	PASS			
15425.00†	7157.43	-1366.82	-7630.66	9942.77	7150.47	-2183.20	-7611.42	-89.51	816.64	499.34	1.64	PASS			
15525.00†	7157.14	-1367.46	-7730.65	10042.76	7150.06	-2185.55	-7711.38	-89.50	818.34	507.62	1.61	PASS			
15625.00†	7156.85	-1368.11	-7830.65	10142.74	7149.66	-2187.90	-7811.33	-89.50	820.05	515.94	1.59	PASS			
15725.00†	7156.56	-1368.75	-7930.65	10242.73	7149.26	-2190.25	-7911.29	-89.49	821.76	524.27	1.57	PASS			
15825.00†	7156.27	-1369.40	-8030.65	10342.72	7148.86	-2192.61	-8011.25	-89.48	823.47	532.62	1.55	PASS			
15925.00†	7155.98	-1370.04	-8130.64	10442.70	7148.46	-2194.96	-8111.20	-89.48	825.18	541.00	1.53	PASS			
16025.00†	7155.70	-1370.69	-8230.64	10542.69	7148.06	-2197.31	-8211.16	-89.47	826.89	549.39	1.51	PASS			
16125.00†	7155.41	-1371.33	-8330.64	10642.67	7147.66	-2199.66	-8311.12	-89.46	828.59	557.79	1.49	PASS			
16225.00†	7155.12	-1371.98	-8430.64	10742.66	7147.25	-2202.01	-8411.07	-89.45	830.30	566.21	1.47	PASS			
16325.00†	7154.83	-1372.62	-8530.63	10842.64	7146.85	-2204.37	-8511.03	-89.45	832.01	574.65	1.45	PASS			
16425.00†	7154.54	-1373.27	-8630.63	10942.63	7146.45	-2206.72	-8610.99	-89.44	833.72	583.09	1.43	PASS			
16525.00†	7154.25	-1373.91	-8730.63	11042.61	7146.05	-2209.07	-8710.95	-89.43	835.43	591.55	1.41	PASS			
16625.00†	7153.97	-1374.56	-8830.63	11142.60	7145.65	-2211.42	-8810.90	-89.43	837.14	600.02	1.40	PASS			
16725.00†	7153.68	-1375.20	-8930.62	11242.58	7145.25	-2213.77	-8910.86	-89.42	838.84	608.50	1.38	PASS			
16825.00†	7153.39	-1375.85	-9030.62	11342.57	7144.85	-2216.12	-9010.82	-89.42	840.55	616.99	1.36	PASS			

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 79 of 202

**BAKER
HUGHES**
a GE company



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: WARD #N-20-19HC PWB Offset Wellpath: WARD #N-20-19HC PWP

Facility: SEC.20-T06N-R66W Slot: SLOT#04 WARD #N-20-19HC Well: WARD #N-20-19HC Threshold Value=1.00 † = interpolated/extrapolated station												
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status
16925.00†	7153.10	-1376.49	-9130.62	11442.56	7144.45	-2218.48	-9110.77	-89.41	842.26	625.49	1.35	PASS
17025.00†	7152.81	-1377.14	-9230.62	11542.54	7144.04	-2220.83	-9210.73	-89.40	843.97	633.99	1.33	PASS
17125.00†	7152.52	-1377.78	-9330.61	11642.53	7143.64	-2223.18	-9310.69	-89.40	845.68	642.51	1.32	PASS
17225.00†	7152.24	-1378.43	-9430.61	11742.51	7143.24	-2225.53	-9410.64	-89.39	847.39	651.03	1.30	PASS
17325.00†	7151.95	-1379.07	-9530.61	11842.50	7142.84	-2227.88	-9510.60	-89.38	849.09	659.56	1.29	PASS
17425.00†	7151.66	-1379.72	-9630.61	11942.48	7142.44	-2230.23	-9610.56	-89.38	850.80	668.09	1.27	PASS
17525.00†	7151.37	-1380.36	-9730.60	12042.47	7142.04	-2232.59	-9710.51	-89.37	852.51	676.63	1.26	PASS
17625.00†	7151.08	-1381.01	-9830.60	12142.45	7141.64	-2234.94	-9810.47	-89.36	854.22	685.18	1.25	PASS
17725.00†	7150.79	-1381.65	-9930.60	12242.44	7141.23	-2237.29	-9910.43	-89.36	855.93	693.73	1.23	PASS
17825.00†	7150.51	-1382.30	-10030.60	12342.42	7140.83	-2239.64	-10010.39	-89.35	857.64	702.29	1.22	PASS
17925.00†	7150.22	-1382.94	-10130.59	12442.41	7140.43	-2241.99	-10110.34	-89.35	859.35	710.85	1.21	PASS
18000.13†	7150.00	-1383.43	-10205.72	12517.53	7140.13	-2243.76	-10185.44	-89.34	860.63	717.28	1.20	PASS

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: WARD #N-20-19HC PWB Offset Wellpath: WARD #N-20-19HC PWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: WARD #N-20-19HC PWB Offset Wellpath: WARD #N-20-19HC PWP

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
7in Casing	0.00	7846.00	7846.00	22.00	7156.88	-2454.69	-3204.52	-1877.56	-3283.31

WELLPATH COMPOSITION - Offset Wellbore: WARD #N-20-19HC PWB Offset Wellpath: WARD #N-20-19HC PWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
0.00	18068.60	ISCWSA MWD, Rev. 4 (Standard)	NOT ACTUAL SURVEYS (PLANNED WELLBORE FOR CLEARANCE WITH SYNERGY HOOD PAD)	WARD #N-20-19HC PWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: WARD #N-20-19HC PWB Offset Wellpath: WARD #N-20-19HC PWP

MD Reference: 23' FROM ENSIGN PLANS (RKB)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	23.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 80 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DONN 4N-20B-L PWB Offset Wellpath: DONN 4N-20B-L PWP (REV-B.0)

Facility: SEC.21-T06N-R66W Slot: SLOT#17 DONN 4N-20B-L (818'FNL & 251'FEL, SEC.21) Well: DONN 4N-20B-L Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	26.00	25.00	119.86	0.83	0.40	119.86	1.57	197.62	PASS	
125.00†	125.00	0.00	0.00	126.00	125.00	119.86	0.83	0.40	119.86	1.89	128.76	PASS	
225.00†	225.00	0.00	0.00	226.05	225.05	119.85	0.95	0.46	119.86	2.45	80.00	PASS	
300.00	300.00	0.00	0.00	301.14	300.12	119.77	2.62	1.25	119.80	2.90	61.45	PASS	
301.29†	301.29	0.00	0.00	302.19	301.17	119.77	2.65	-142.53	119.80	2.90	61.23	PASS	
325.00†	325.00	-0.09	0.06	326.15	325.11	119.72	3.61	-142.10	119.86	3.05	57.07	PASS	
425.00†	424.96	-2.20	1.61	426.03	424.80	119.42	9.74	-139.94	121.89	3.86	41.79	PASS	
525.00†	524.77	-7.13	5.22	525.58	523.88	118.94	19.29	-137.32	126.86	4.94	31.67	PASS	
625.00†	624.30	-14.86	10.88	625.02	622.58	118.34	31.40	-134.79	134.79	5.90	27.13	PASS	
725.00†	723.44	-25.39	18.59	724.42	721.22	117.74	43.63	-133.46	145.32	6.82	24.65	PASS	
825.00†	822.07	-38.71	28.34	823.57	819.61	117.13	55.84	-133.18	158.27	7.74	23.20	PASS	
895.18	890.91	-49.71	36.39	892.94	888.46	116.71	64.38	-133.50	168.77	8.37	22.65	PASS	
925.00†	920.09	-54.67	40.02	922.38	917.67	116.53	68.00	-133.77	173.49	8.61	22.56	PASS	
1025.00†	1017.94	-71.32	52.20	1021.08	1015.62	115.92	80.15	-134.58	189.33	9.38	22.39	PASS	
1125.00†	1115.79	-87.96	64.39	1119.79	1113.57	115.32	92.31	-135.26	205.20	10.16	22.21	PASS	
1225.00†	1213.64	-104.60	76.57	1218.49	1211.53	114.72	104.46	-135.85	221.10	10.98	21.98	PASS	
1325.00†	1311.48	-121.25	88.76	1317.20	1309.48	114.12	116.61	-136.35	237.01	11.75	21.88	PASS	
1425.00†	1409.33	-137.89	100.94	1415.90	1407.43	113.51	128.76	-136.80	252.95	12.56	21.73	PASS	
1525.00†	1507.18	-154.53	113.12	1514.61	1505.38	112.91	140.91	-137.19	268.89	13.38	21.58	PASS	
1625.00†	1605.03	-171.18	125.31	1613.31	1603.34	112.31	153.07	-137.54	284.85	14.20	21.45	PASS	
1725.00†	1702.88	-187.82	137.49	1712.02	1701.29	111.70	165.22	-137.85	300.81	15.03	21.32	PASS	
1825.00†	1800.73	-204.47	149.67	1810.72	1799.24	111.10	177.37	-138.12	316.78	15.27	21.71	PASS	
1925.00†	1898.58	-221.11	161.86	1909.43	1897.19	110.50	189.52	-138.38	332.76	15.44	22.54	PASS	
2025.00†	1996.43	-237.75	174.04	2008.13	1995.14	109.89	201.67	-138.60	348.75	15.66	23.28	PASS	
2125.00†	2094.28	-254.40	186.22	2106.84	2093.10	109.29	213.82	-138.81	364.74	15.95	23.88	PASS	
2225.00†	2192.13	-271.04	198.41	2205.54	2191.05	108.69	225.98	-139.01	380.73	16.32	24.34	PASS	
2325.00†	2289.98	-287.68	210.59	2304.25	2289.00	108.09	238.13	-139.18	396.73	16.76	24.67	PASS	
2425.00†	2387.83	-304.33	222.77	2402.95	2386.95	107.48	250.28	-139.34	412.73	17.26	24.89	PASS	
2525.00†	2485.68	-320.97	234.96	2501.66	2484.91	106.88	262.43	-139.49	428.73	17.82	25.01	PASS	
2625.00†	2583.53	-337.62	247.14	2600.36	2582.86	106.28	274.58	-139.63	444.74	18.43	25.06	PASS	
2725.00†	2681.38	-354.26	259.33	2699.07	2680.81	105.67	286.73	-139.76	460.75	19.09	25.03	PASS	
2825.00†	2779.23	-370.90	271.51	2797.77	2778.76	105.07	298.89	-139.88	476.76	19.78	24.96	PASS	
2925.00†	2877.08	-387.55	283.69	2896.48	2876.72	104.47	311.04	-140.00	492.77	20.52	24.84	PASS	
3025.00†	2974.93	-404.19	295.88	2995.18	2974.67	103.86	323.19	-140.10	508.79	21.29	24.69	PASS	
3125.00†	3072.78	-420.83	308.06	3093.89	3072.62	103.26	335.34	-140.20	524.81	22.09	24.51	PASS	
3225.00†	3170.63	-437.48	320.24	3192.59	3170.57	102.66	347.49	-140.29	540.82	22.92	24.32	PASS	
3325.00†	3268.48	-454.12	332.43	3291.30	3268.52	102.06	359.64	-140.38	556.84	23.77	24.12	PASS	
3425.00†	3366.33	-470.77	344.61	3390.00	3366.48	101.45	371.80	-140.47	572.86	24.64	23.91	PASS	
3525.00†	3464.18	-487.41	356.79	3488.71	3464.43	100.85	383.95	-140.55	588.89	25.53	23.69	PASS	
3625.00†	3562.03	-504.05	368.98	3587.41	3562.38	100.25	396.10	-140.62	604.91	26.44	23.48	PASS	
3725.00†	3659.88	-520.70	381.16	3686.12	3660.33	99.64	408.25	-140.69	620.93	27.36	23.27	PASS	
3825.00†	3757.73	-537.34	393.34	3784.82	3758.29	99.04	420.40	-140.76	636.96	28.30	23.06	PASS	
3925.00†	3855.57	-553.98	405.53	3883.53	3856.24	98.44	432.55	-140.82	652.98	29.25	22.85	PASS	
4025.00†	3953.42	-570.63	417.71	3982.23	3954.19	97.83	444.71	-140.88	669.01	30.22	22.65	PASS	
4125.00†	4051.27	-587.27	429.90	4080.94	4052.14	97.23	456.86	-140.94	685.03	31.19	22.45	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 81 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DONN 4N-20B-L PWB Offset Wellpath: DONN 4N-20B-L PWP (REV-B.0)

Facility: SEC.21-T06N-R66W Slot: SLOT#17 DONN 4N-20B-L (818'FNL & 251'FEL, SEC.21) Well: DONN 4N-20B-L Threshold Value=1.00 † = Interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
4225.00†	4149.12	-603.92	442.08	4179.64	4150.10	96.63	469.01	-141.00	701.06	32.17	22.26	PASS	
4325.00†	4246.97	-620.56	454.26	4278.35	4248.05	96.03	481.16	-141.05	717.09	33.16	22.08	PASS	
4425.00†	4344.82	-637.20	466.45	4377.05	4346.00	95.42	493.31	-141.10	733.12	34.16	21.90	PASS	
4525.00†	4442.67	-653.85	478.63	4475.76	4443.95	94.82	505.46	-141.15	749.15	35.16	21.72	PASS	
4625.00†	4540.52	-670.49	490.81	4574.46	4541.90	94.22	517.62	-141.19	765.18	36.18	21.55	PASS	
4725.00†	4638.37	-687.13	503.00	4673.17	4639.86	93.61	529.77	-141.24	781.21	37.19	21.39	PASS	
4825.00†	4736.22	-703.78	515.18	4771.87	4737.81	93.01	541.92	-141.28	797.24	38.22	21.24	PASS	
4925.00†	4834.07	-720.42	527.36	4870.58	4835.76	92.41	554.07	-141.32	813.27	39.24	21.09	PASS	
5025.00†	4931.92	-737.07	539.55	4969.28	4933.71	91.80	566.22	-141.36	829.30	40.28	20.94	PASS	
5125.00†	5029.77	-753.71	551.73	5067.99	5031.67	91.20	578.38	-141.40	845.33	41.32	20.80	PASS	
5225.00†	5127.62	-770.35	563.91	5166.69	5129.62	90.60	590.53	-141.44	861.36	42.36	20.66	PASS	
5325.00†	5225.47	-787.00	576.10	5265.40	5227.57	90.00	602.68	-141.47	877.40	43.40	20.53	PASS	
5425.00†	5323.32	-803.64	588.28	5364.10	5325.52	89.39	614.83	-141.51	893.43	44.45	20.41	PASS	
5525.00†	5421.17	-820.28	600.47	5462.81	5423.48	88.79	626.98	-141.54	909.46	45.50	20.29	PASS	
5625.00†	5519.02	-836.93	612.65	5561.51	5521.43	88.19	639.13	-141.57	925.50	46.56	20.17	PASS	
5725.00†	5616.87	-853.57	624.83	5660.22	5619.38	87.58	651.29	-141.60	941.53	47.62	20.06	PASS	
5825.00†	5714.72	-870.22	637.02	5758.92	5717.33	86.98	663.44	-141.63	957.56	48.68	19.95	PASS	
5925.00†	5812.57	-886.86	649.20	5857.63	5815.28	86.38	675.59	-141.66	973.60	49.74	19.84	PASS	
6025.00†	5910.42	-903.50	661.38	5956.33	5913.24	85.77	687.74	-141.69	989.63	50.80	19.74	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: DONN 4N-20B-L PWB Offset Wellpath: DONN 4N-20B-L PWP (REV-B.0)

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: DONN 4N-20B-L PWB Offset Wellpath: DONN 4N-20B-L PWP (REV-B.0)

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
13.5in Open Hole	25.00	1750.00	1725.00	24.00	1738.98	73.07	0.51	70.51	52.04
9.625in Casing Surface	25.00	1750.00	1725.00	24.00	1738.98	73.07	0.51	70.51	52.04
8.5in Open Hole	1750.00	17749.81	15999.81	1738.98	6964.00	70.51	52.04	-19.79	-3108.85

SURVEY PROGRAM - Offset Wellbore: DONN 4N-20B-L PWB Offset Wellpath: DONN 4N-20B-L PWP (REV-B.0)

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
25.00	1750.00	Custom BHI NaviTrak (Standard Rotating+Axial Corr) (Rockies 0.03Gt model)		DONN 4N-20B-L PWB
1750.00	17753.95	Custom BHI AutoTrak Curve (IFR1, Short) (Rockies 0.03Gt model)		DONN 4N-20B-L PWB



REFERENCE WELLPATH IDENTIFICATION			
Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

OFFSET WELLPATH REFERENCE - Offset Wellbore: DONN 4N-20B-L PWB Offset Wellpath: DONN 4N-20B-L PWP (REV-B.0)	
MD Reference: PRECISION DRILLING (25') (RKB)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	25.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 83 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: HOOD #20-42-11 AWB Offset Wellpath: HOOD #20-42-11 AWP

Facility: SEC.20-T06N-R66W				Slot: SLOT#01 EX:HOOD #20-42-11 (2015'FNL & 657'FEL SEC.20, PR)				Well: HOOD #20-42-11				Threshold Value=1.00 † = interpolated/extrapolated station			
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status			
25.00	25.00	0.00	0.00	24.54	32.54	-1150.94	-5711.65	-101.39	5826.46	33.07	181.21	PASS			
125.00†	125.00	0.00	0.00	188.79	196.78	-1151.94	-5710.31	-101.41	5825.79	50.14	118.35	PASS			
225.00†	225.00	0.00	0.00	320.89	328.83	-1154.58	-5707.90	-101.44	5824.43	50.17	118.24	PASS			
300.00	300.00	0.00	0.00	688.76	695.12	-1178.80	-5685.89	-101.71	5820.23	50.30	117.84	PASS			
325.00†	325.00	-0.09	0.06	721.20	727.32	-1181.51	-5683.07	114.49	5818.56	50.16	117.74	PASS			
425.00†	424.96	-2.20	1.61	825.02	830.36	-1190.24	-5673.81	114.52	5812.59	50.28	117.35	PASS			
525.00†	524.77	-7.13	5.22	917.39	922.04	-1198.10	-5665.78	114.56	5808.31	50.42	116.93	PASS			
625.00†	624.30	-14.86	10.88	1057.42	1060.79	-1211.74	-5652.70	114.58	5805.10	50.61	116.41	PASS			
725.00†	723.44	-25.39	18.59	1167.57	1169.65	-1224.34	-5641.51	114.60	5802.87	50.82	115.88	PASS			
825.00†	822.07	-38.71	28.34	1275.17	1275.70	-1238.45	-5630.11	114.62	5801.99	51.04	115.35	PASS			
895.18	890.91	-49.71	36.39	1373.18	1372.17	-1251.98	-5619.26	114.64	5802.02	51.26	114.86	PASS			
925.00†	920.09	-54.67	40.02	1414.82	1413.13	-1257.72	-5614.51	114.65	5802.08	51.35	114.66	PASS			
1025.00†	1017.94	-71.32	52.20	1519.40	1516.00	-1272.10	-5602.35	114.68	5802.06	51.62	114.04	PASS			
1125.00†	1115.79	-87.96	64.39	1608.80	1603.95	-1284.42	-5592.07	114.71	5802.18	51.89	113.45	PASS			
1225.00†	1213.64	-104.60	76.57	1725.79	1719.08	-1300.32	-5578.70	114.75	5802.35	52.23	112.70	PASS			
1325.00†	1311.48	-121.25	88.76	1855.20	1846.56	-1316.58	-5563.47	114.80	5801.96	52.61	111.86	PASS			
1425.00†	1409.33	-137.89	100.94	1948.71	1938.83	-1327.16	-5552.55	114.85	5801.44	52.94	111.14	PASS			
1525.00†	1507.18	-154.53	113.12	2061.85	2050.65	-1338.63	-5539.68	114.92	5801.00	53.33	110.32	PASS			
1625.00†	1605.03	-171.18	125.31	2169.24	2156.51	-1350.99	-5526.55	114.98	5799.97	53.73	109.47	PASS			
1725.00†	1702.88	-187.82	137.49	2376.61	2360.75	-1375.33	-5500.20	115.07	5798.84	54.41	108.06	PASS			
1825.00†	1800.73	-204.47	149.67	2475.64	2458.01	-1387.53	-5486.17	115.11	5796.06	54.60	107.20	PASS			
1925.00†	1898.58	-221.11	161.86	2557.85	2538.79	-1397.71	-5474.74	115.14	5793.57	54.95	106.48	PASS			
2025.00†	1996.43	-237.75	174.04	2801.71	2777.62	-1430.51	-5438.22	115.21	5790.54	55.81	104.76	PASS			
2125.00†	2094.28	-254.40	186.22	2905.87	2879.30	-1445.05	-5420.94	115.22	5785.69	56.30	103.75	PASS			
2225.00†	2192.13	-271.04	198.41	3028.10	2998.85	-1460.68	-5400.75	115.26	5780.71	56.87	102.62	PASS			
2325.00†	2289.98	-287.68	210.59	3111.84	3080.51	-1472.40	-5386.40	115.27	5775.36	57.34	101.68	PASS			
2425.00†	2387.83	-304.33	222.77	3162.09	3129.64	-1479.07	-5378.27	115.29	5770.79	57.70	100.95	PASS			
2525.00†	2485.68	-320.97	234.96	3212.33	3178.93	-1485.24	-5370.68	115.30	5767.08	58.08	100.22	PASS			
2625.00†	2583.53	-337.62	247.14	3262.56	3228.33	-1490.92	-5363.61	115.33	5764.23	58.46	99.51	PASS			
2725.00†	2681.38	-354.26	259.33	3351.88	3316.35	-1500.28	-5351.68	115.38	5761.94	58.99	98.57	PASS			
2825.00†	2779.23	-370.90	271.51	3412.02	3375.65	-1506.56	-5343.87	115.42	5760.03	59.43	97.81	PASS			
2925.00†	2877.08	-387.55	283.69	3755.75	3713.44	-1546.41	-5294.56	115.57	5758.41	60.94	95.33	PASS			
3025.00†	2974.93	-404.19	295.88	3845.45	3801.15	-1557.29	-5279.23	115.61	5752.74	61.57	94.26	PASS			
3125.00†	3072.78	-420.83	308.06	3934.64	3888.35	-1568.29	-5264.11	115.64	5747.25	62.20	93.20	PASS			
3225.00†	3170.63	-437.48	320.24	3983.35	3936.05	-1574.19	-5256.14	115.65	5742.30	62.69	92.39	PASS			
3325.00†	3268.48	-454.12	332.43	4032.07	3983.86	-1579.78	-5248.66	115.67	5738.24	63.18	91.60	PASS			
3425.00†	3366.33	-470.77	344.61	4080.78	4031.78	-1585.06	-5241.67	115.70	5735.07	63.68	90.83	PASS			
3525.00†	3464.18	-487.41	356.79	4128.61	4078.93	-1589.96	-5235.29	115.73	5732.80	64.18	90.08	PASS			
3625.00†	3562.03	-504.05	368.98	4169.68	4119.46	-1594.23	-5230.21	115.76	5731.50	64.65	89.39	PASS			
3725.00†	3659.88	-520.70	381.16	4210.78	4160.03	-1598.78	-5225.50	115.78	5731.24	65.13	88.72	PASS			
3825.00†	3757.73	-537.34	393.34	4545.85	4489.41	-1640.98	-5181.25	115.91	5729.70	66.94	86.28	PASS			
3925.00†	3855.57	-553.98	405.53	4589.89	4532.69	-1646.03	-5174.79	115.93	5726.34	67.49	85.53	PASS			
4025.00†	3953.42	-570.63	417.71	4642.43	4584.45	-1651.51	-5167.68	115.96	5723.90	68.07	84.76	PASS			
4125.00†	4051.27	-587.27	429.90	4698.08	4639.42	-1656.59	-5160.71	116.00	5722.25	68.66	84.00	PASS			
4225.00†	4149.12	-603.92	442.08	4759.82	4700.55	-1661.53	-5153.54	116.05	5721.32	69.26	83.25	PASS			

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 84 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: HOOD #20-42-11 AWB Offset Wellpath: HOOD #20-42-11 AWP

Facility: SEC.20-T06N-R66W Slot: SLO#01 EX:HOOD #20-42-11 (2015'FNL & 657'FEL SEC.20, PR) Well: HOOD #20-42-11 Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
4325.00†	4246.97	-620.56	454.26	4821.44	4761.65	-1665.86	-5146.91	116.11	5721.07	69.87	82.51	PASS	
4425.00†	4344.82	-637.20	466.45	4882.92	4822.71	-1669.59	-5140.81	116.18	5721.49	70.48	81.79	PASS	
4525.00†	4442.67	-653.85	478.63	4948.50	4887.93	-1673.04	-5134.81	116.26	5722.56	71.10	81.09	PASS	
4625.00†	4540.52	-670.49	490.81	5014.11	4953.23	-1676.11	-5129.27	116.34	5724.24	71.73	80.41	PASS	
4725.00†	4638.37	-687.13	503.00	5078.26	5017.14	-1678.72	-5124.30	116.43	5726.53	72.35	79.74	PASS	
4825.00†	4736.22	-703.78	515.18	5124.75	5063.49	-1680.41	-5121.10	116.49	5729.62	72.89	79.19	PASS	
4925.00†	4834.07	-720.42	527.36	5171.15	5109.78	-1681.94	-5118.36	116.56	5733.65	73.43	78.65	PASS	
5025.00†	4931.92	-737.07	539.55	5217.44	5155.99	-1683.31	-5116.09	116.63	5738.62	73.98	78.14	PASS	
5125.00†	5029.77	-753.71	551.73	5263.61	5202.12	-1684.53	-5114.27	116.70	5744.54	74.52	77.64	PASS	
5225.00†	5127.62	-770.35	563.91	5330.65	5269.11	-1686.06	-5112.18	116.80	5751.22	75.14	77.09	PASS	
5325.00†	5225.47	-787.00	576.10	5398.68	5337.10	-1687.34	-5110.46	116.91	5758.47	75.77	76.54	PASS	
5425.00†	5323.32	-803.64	588.28	5466.55	5404.99	-1688.36	-5109.14	117.02	5766.29	76.40	76.00	PASS	
5525.00†	5421.17	-820.28	600.47	5534.25	5472.64	-1689.12	-5108.24	117.14	5774.67	77.04	75.48	PASS	
5625.00†	5519.02	-836.93	612.65	5626.77	5565.15	-1689.86	-5107.39	117.30	5783.46	77.78	74.87	PASS	
5725.00†	5616.87	-853.57	624.83	5727.46	5665.84	-1690.51	-5106.46	117.47	5792.28	78.56	74.23	PASS	
5825.00†	5714.72	-870.22	637.02	5828.11	5766.48	-1691.01	-5105.50	117.65	5801.11	79.35	73.60	PASS	
5925.00†	5812.57	-886.86	649.20	5939.20	5877.56	-1691.56	-5104.30	117.84	5809.87	80.20	72.93	PASS	
6025.00†	5910.42	-903.50	661.38	6051.32	5989.66	-1692.37	-5102.79	118.04	5818.44	81.06	72.26	PASS	
6125.00†	6008.27	-920.15	673.57	6154.77	6093.10	-1693.31	-5101.14	118.21	5826.85	81.88	71.63	PASS	
6225.00†	6106.12	-936.79	685.75	6243.21	6181.53	-1693.98	-5099.83	118.36	5835.40	82.65	71.06	PASS	
6325.00†	6203.97	-953.43	697.93	6331.54	6269.85	-1694.46	-5098.69	118.51	5844.16	83.42	70.50	PASS	
6425.00†	6301.82	-970.08	710.12	6419.38	6357.69	-1694.75	-5097.73	118.67	5853.14	84.20	69.96	PASS	
6525.00†	6399.66	-986.72	722.30	6504.67	6442.97	-1695.07	-5096.96	118.81	5862.37	84.97	69.43	PASS	
6605.93	6478.85	-1000.19	732.16	6573.71	6512.01	-1695.46	-5096.46	118.93	5870.03	85.59	69.01	PASS	
6625.00†	6497.54	-1003.38	734.20	6590.01	6528.31	-1695.57	-5096.35	111.68	5871.58	85.74	68.91	PASS	
6725.00†	6595.97	-1020.39	735.57	6675.81	6614.11	-1696.28	-5095.91	63.15	5870.55	86.62	68.19	PASS	
6825.00†	6693.34	-1037.59	721.30	6757.56	6695.85	-1697.08	-5095.67	32.53	5854.23	87.91	67.00	PASS	
6925.00†	6787.24	-1054.57	691.74	6835.66	6773.94	-1697.86	-5095.66	19.54	5823.05	89.22	65.66	PASS	
7025.00†	6875.37	-1070.91	647.62	6909.14	6847.42	-1698.61	-5095.84	12.96	5777.72	90.33	64.34	PASS	
7125.00†	6955.55	-1086.20	590.03	6976.25	6914.53	-1699.32	-5096.16	8.85	5719.30	91.24	63.05	PASS	
7225.00†	7025.81	-1100.06	520.38	7104.68	7042.95	-1700.52	-5096.32	5.79	5648.74	92.28	61.57	PASS	
7325.00†	7084.42	-1112.16	440.40	7212.02	7150.28	-1701.28	-5095.44	2.76	5567.49	93.06	60.17	PASS	
7425.00†	7129.94	-1122.20	352.04	7277.59	7215.84	-1701.63	-5094.46	-1.41	5477.91	93.54	58.90	PASS	
7525.00†	7161.25	-1129.93	257.49	7303.27	7241.52	-1701.78	-5094.05	-9.95	5382.60	93.76	57.73	PASS	
7625.00†	7177.57	-1135.16	159.08	7316.07	7254.32	-1701.85	-5093.85	-43.35	5283.96	93.87	56.61	PASS	
7682.94	7180.00	-1136.99	101.24	7317.42	7255.67	-1701.86	-5093.83	-101.65	5226.23	93.89	55.98	PASS	
7725.00†	7179.88	-1138.00	59.19	7316.76	7255.01	-1701.86	-5093.84	-101.57	5184.33	93.90	55.52	PASS	
7825.00†	7179.59	-1140.39	-40.78	7315.20	7253.45	-1701.85	-5093.86	-101.38	5084.71	93.93	54.44	PASS	
7925.00†	7179.29	-1142.78	-140.75	7313.63	7251.88	-1701.84	-5093.88	-101.18	4985.11	93.96	53.36	PASS	
8025.00†	7179.00	-1145.17	-240.72	7312.05	7250.30	-1701.83	-5093.91	-100.98	4885.53	94.00	52.27	PASS	
8125.00†	7178.71	-1147.56	-340.69	7310.46	7248.71	-1701.82	-5093.93	-100.78	4785.96	94.05	51.18	PASS	
8225.00†	7178.42	-1149.95	-440.66	7308.87	7247.12	-1701.81	-5093.96	-100.58	4686.41	94.10	50.08	PASS	
8325.00†	7178.13	-1152.34	-540.63	7307.27	7245.51	-1701.80	-5093.98	-100.38	4586.88	94.17	48.98	PASS	
8425.00†	7177.84	-1154.73	-640.61	7305.65	7243.90	-1701.79	-5094.01	-100.18	4487.36	94.25	47.88	PASS	
8525.00†	7177.55	-1157.12	-740.58	7304.04	7242.28	-1701.78	-5094.03	-99.98	4387.87	94.34	46.77	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 85 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: HOOD #20-42-11 AWB Offset Wellpath: HOOD #20-42-11 AWP

Facility: SEC.20-T06N-R66W Slot: SLOT#01 EX:HOOD #20-42-11 (2015'FNL & 657'FEL SEC.20, PR) Well: HOOD #20-42-11 Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
8625.00†	7177.25	-1159.52	-840.55	7302.41	7240.66	-1701.77	-5094.06	-99.77	4288.40	94.44	45.66	PASS	
8725.00†	7176.96	-1161.91	-940.52	7300.77	7239.02	-1701.76	-5094.08	-99.56	4188.96	94.56	44.55	PASS	
8825.00†	7176.67	-1164.30	-1040.49	7299.13	7237.38	-1701.75	-5094.11	-99.36	4089.55	94.69	43.43	PASS	
8925.00†	7176.38	-1166.69	-1140.46	7297.48	7235.73	-1701.74	-5094.14	-99.15	3990.16	94.85	42.31	PASS	
9025.00†	7176.09	-1169.08	-1240.43	7295.82	7234.07	-1701.73	-5094.16	-98.94	3890.80	95.02	41.18	PASS	
9125.00†	7175.80	-1171.47	-1340.40	7294.15	7232.40	-1701.72	-5094.19	-98.73	3791.48	95.21	40.04	PASS	
9225.00†	7175.51	-1173.86	-1440.37	7292.47	7230.72	-1701.72	-5094.22	-98.51	3692.19	95.43	38.91	PASS	
9325.00†	7175.21	-1176.25	-1540.34	7290.79	7229.04	-1701.71	-5094.24	-98.30	3592.94	95.68	37.76	PASS	
9425.00†	7174.92	-1178.64	-1640.32	7289.09	7227.35	-1701.70	-5094.27	-98.08	3493.73	95.95	36.61	PASS	
9525.00†	7174.63	-1181.03	-1740.29	7287.39	7225.64	-1701.69	-5094.30	-97.87	3394.56	96.27	35.46	PASS	
9625.00†	7174.34	-1183.42	-1840.26	7285.68	7223.93	-1701.68	-5094.32	-97.65	3295.45	96.62	34.29	PASS	
9725.00†	7174.05	-1185.82	-1940.23	7283.96	7222.21	-1701.67	-5094.35	-97.43	3196.39	97.01	33.13	PASS	
9825.00†	7173.76	-1188.21	-2040.20	7282.23	7220.48	-1701.66	-5094.38	-97.21	3097.39	97.46	31.95	PASS	
9925.00†	7173.47	-1190.60	-2140.17	7280.49	7218.75	-1701.65	-5094.41	-96.98	2998.46	97.96	30.77	PASS	
10025.00†	7173.17	-1192.99	-2240.14	7278.75	7217.00	-1701.64	-5094.44	-96.76	2899.59	98.52	29.59	PASS	
10125.00†	7172.88	-1195.38	-2340.11	7276.99	7215.24	-1701.63	-5094.47	-96.53	2800.81	99.16	28.39	PASS	
10225.00†	7172.59	-1197.77	-2440.08	7275.23	7213.48	-1701.62	-5094.49	-96.31	2702.12	99.88	27.20	PASS	
10325.00†	7172.30	-1200.16	-2540.05	7273.45	7211.70	-1701.61	-5094.52	-96.08	2603.52	100.69	25.99	PASS	
10425.00†	7172.01	-1202.55	-2640.03	7271.67	7209.92	-1701.60	-5094.55	-95.85	2505.03	101.62	24.78	PASS	
10525.00†	7171.72	-1204.94	-2740.00	7269.87	7208.13	-1701.59	-5094.58	-95.62	2406.67	102.66	23.56	PASS	
10625.00†	7171.42	-1207.33	-2839.97	7268.07	7206.33	-1701.58	-5094.61	-95.39	2308.45	103.85	22.34	PASS	
10725.00†	7171.13	-1209.72	-2939.94	7266.26	7204.51	-1701.58	-5094.64	-95.15	2210.38	105.20	21.12	PASS	
10825.00†	7170.84	-1212.11	-3039.91	7264.44	7202.69	-1701.57	-5094.67	-94.92	2112.49	106.74	19.89	PASS	
10925.00†	7170.55	-1214.51	-3139.88	7262.22	7200.48	-1701.55	-5094.71	-94.63	2014.81	108.50	18.66	PASS	
11025.00†	7170.26	-1216.90	-3239.85	7259.92	7198.18	-1701.54	-5094.75	-94.33	1917.37	110.51	17.43	PASS	
11125.00†	7169.97	-1219.29	-3339.82	7257.67	7195.92	-1701.53	-5094.78	-94.04	1820.20	112.83	16.21	PASS	
11225.00†	7169.68	-1221.68	-3439.79	7255.45	7193.71	-1701.52	-5094.82	-93.76	1723.35	115.50	14.99	PASS	
11325.00†	7169.38	-1224.07	-3539.76	7253.28	7191.54	-1701.51	-5094.85	-93.47	1626.88	118.59	13.78	PASS	
11425.00†	7169.09	-1226.46	-3639.74	7251.15	7189.40	-1701.50	-5094.89	-93.20	1530.86	122.18	12.58	PASS	
11525.00†	7168.80	-1228.85	-3739.71	7249.05	7187.31	-1701.49	-5094.92	-92.93	1435.39	126.35	11.40	PASS	
11625.00†	7168.51	-1231.24	-3839.68	7247.00	7185.26	-1701.48	-5094.95	-92.66	1340.57	131.24	10.25	PASS	
11725.00†	7168.22	-1233.63	-3939.65	7244.98	7183.24	-1701.46	-5094.98	-92.40	1246.55	136.99	9.13	PASS	
11825.00†	7167.93	-1236.02	-4039.62	7243.00	7181.26	-1701.45	-5095.01	-92.14	1153.54	143.77	8.05	PASS	
11925.00†	7167.64	-1238.41	-4139.59	7241.05	7179.31	-1701.44	-5095.04	-91.89	1061.80	151.83	7.01	PASS	
12025.00†	7167.34	-1240.81	-4239.56	7239.14	7177.40	-1701.43	-5095.07	-91.64	971.69	161.45	6.04	PASS	
12125.00†	7167.05	-1243.20	-4339.53	7237.26	7175.52	-1701.42	-5095.10	-91.39	883.70	172.97	5.12	PASS	
12225.00†	7166.76	-1245.59	-4439.50	7235.41	7173.67	-1701.41	-5095.12	-91.15	798.54	186.82	4.28	PASS	
12325.00†	7166.47	-1247.98	-4539.47	7233.59	7171.85	-1701.40	-5095.15	-90.92	717.22	203.41	3.53	PASS	
12425.00†	7166.18	-1250.37	-4639.45	7231.81	7170.07	-1701.39	-5095.18	-90.68	641.19	223.10	2.88	PASS	
12525.00†	7165.89	-1252.76	-4739.42	7230.05	7168.31	-1701.38	-5095.20	-90.46	572.58	245.79	2.33	PASS	
12625.00†	7165.60	-1255.15	-4839.39	7228.33	7166.59	-1701.37	-5095.23	-90.23	514.36	270.39	1.90	PASS	
12725.00†	7165.30	-1257.54	-4939.36	7226.63	7164.89	-1701.36	-5095.25	-90.01	470.40	293.87	1.60	PASS	
12825.00†	7165.01	-1259.93	-5039.33	7224.96	7163.22	-1701.35	-5095.27	-89.79	444.95	311.09	1.43	PASS	
12891.12†	7164.82	-1261.51	-5105.43	7224.30	7162.56	-1701.35	-5095.28	-89.71	439.96	316.38	1.39	PASS	
12903.68†	7164.78	-1261.81	-5117.99	7223.66	7161.92	-1701.34	-5095.29	-89.62	440.13	316.74	1.39	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 86 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: **HOOD #20-42-11 AWB** Offset Wellpath: **HOOD #20-42-11 AWP**

Facility: SEC.20-T06N-R66W Slot: SLOT#01 EX-HOOD #20-42-11 (2015'FNL & 657'FEL SEC.20, PR) Well: HOOD #20-42-11 Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
12925.00†	7164.72	-1262.32	-5139.30	7223.31	7161.58	-1701.34	-5095.29	-89.58	441.23	316.86	1.39	PASS	
13025.00†	7164.43	-1264.71	-5239.27	7221.70	7159.96	-1701.33	-5095.32	-89.37	459.76	309.89	1.48	PASS	
13125.00†	7164.14	-1267.10	-5339.24	7220.11	7158.37	-1701.32	-5095.34	-89.16	498.07	293.84	1.70	PASS	
13225.00†	7163.85	-1269.50	-5439.21	7218.54	7156.80	-1701.31	-5095.36	-88.96	552.05	273.95	2.02	PASS	
13325.00†	7163.56	-1271.89	-5539.18	7217.00	7155.26	-1701.31	-5095.38	-88.76	617.60	254.07	2.43	PASS	
13425.00†	7163.26	-1274.28	-5639.16	7215.48	7153.75	-1701.30	-5095.40	-88.56	691.46	236.03	2.93	PASS	
13525.00†	7162.97	-1276.67	-5739.13	7213.99	7152.25	-1701.29	-5095.42	-88.36	771.22	220.37	3.51	PASS	
13625.00†	7162.68	-1279.06	-5839.10	7212.52	7150.78	-1701.28	-5095.43	-88.17	855.25	207.05	4.14	PASS	
13725.00†	7162.39	-1281.45	-5939.07	7211.07	7149.33	-1701.27	-5095.45	-87.98	942.38	195.76	4.82	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: **HOOD #20-42-11 AWB** Offset Wellpath: **HOOD #20-42-11 AWP**

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: **HOOD #20-42-11 AWB** Offset Wellpath: **HOOD #20-42-11 AWP**

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
12.25in Open Hole	0.00	690.00	690.00	-1.00	687.35	-701.19	-3481.91	-709.72	-3474.03
8.625in Casing Surface	0.00	690.00	690.00	-1.00	687.35	-701.19	-3481.91	-709.72	-3474.03
7.875in Open Hole	690.00	7374.00	6684.00	687.35	7303.24	-709.72	-3474.03	-869.28	-3293.39
4.5in Casing Production	0.00	7374.00	7374.00	-1.00	7303.24	-701.19	-3481.91	-869.28	-3293.39

WELLPATH COMPOSITION - Offset Wellbore: **HOOD #20-42-11 AWB** Offset Wellpath: **HOOD #20-42-11 AWP**

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
0.00	7359.00	ISCWSA MWD, Rev. 4 (Standard)	MS ENERGY GRID SURVEYS, CONVERTED TO TRUE NORTH <80-7359>	HOOD #20-42-11 AWB
7359.00	7410.00	Blind Drilling (std)	Projection to bit	HOOD #20-42-11 AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: **HOOD #20-42-11 AWB** Offset Wellpath: **HOOD #20-42-11 AWP**

MD Reference: 16' FROM NS SURVEYS (RKB)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	16.00ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 87 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. HOOD 20-42-12 AWB Offset Wellpath: EX. HOOD 20-42-12 AWP

Facility: SEC.20-T06N-R66W Slot: SLOT#04 EX. HOOD 20-42-12 (2000'FNL & 657'FEL, PR, NB/CD) Well: EX. HOOD 20-42-12 Threshold Value=1.00 † = Interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	1.97	25.97	-1160.42	-5710.28	-101.49	5827.00	50.17	118.41	PASS	
125.00†	125.00	0.00	0.00	150.51	174.51	-1160.01	-5709.41	-101.49	5826.27	50.18	118.36	PASS	
225.00†	225.00	0.00	0.00	183.00	206.99	-1159.94	-5709.33	-101.48	5826.00	50.20	118.31	PASS	
300.00	300.00	0.00	0.00	207.36	231.35	-1159.96	-5709.51	-101.48	5826.56	50.21	118.30	PASS	
325.00†	325.00	-0.09	0.06	215.48	239.47	-1159.98	-5709.62	-114.71	5826.93	50.21	118.30	PASS	
425.00†	424.96	-2.20	1.61	244.18	268.17	-1160.12	-5710.18	-114.66	5830.09	50.22	118.33	PASS	
525.00†	524.77	-7.13	5.22	268.42	292.39	-1160.40	-5710.95	-114.57	5835.98	50.24	118.40	PASS	
625.00†	624.30	-14.86	10.88	292.55	316.49	-1160.84	-5712.00	-114.43	5844.60	50.26	118.53	PASS	
725.00†	723.44	-25.39	18.59	316.53	340.43	-1161.44	-5713.33	-114.25	5855.95	50.28	118.72	PASS	
825.00†	822.07	-38.71	28.34	371.39	395.15	-1163.33	-5716.90	-114.06	5869.81	50.33	118.89	PASS	
895.18	890.91	-49.71	36.39	419.27	442.87	-1165.50	-5720.10	-113.93	5880.72	50.37	119.01	PASS	
925.00†	920.09	-54.67	40.02	438.04	461.57	-1166.46	-5721.39	-113.96	5885.59	50.39	119.06	PASS	
1025.00†	1017.94	-71.32	52.20	500.97	524.24	-1170.00	-5725.88	-114.05	5902.30	50.45	119.25	PASS	
1125.00†	1115.79	-87.96	64.39	542.72	565.77	-1172.72	-5729.10	-114.11	5919.77	50.50	119.50	PASS	
1225.00†	1213.64	-104.60	76.57	582.57	605.37	-1175.71	-5732.50	-114.16	5938.23	50.54	119.76	PASS	
1325.00†	1311.48	-121.25	88.76	627.46	649.90	-1179.52	-5736.68	-114.21	5957.63	50.60	120.00	PASS	
1425.00†	1409.33	-137.89	100.94	676.23	698.22	-1184.00	-5741.56	-114.27	5977.86	50.67	120.23	PASS	
1525.00†	1507.18	-154.53	113.12	724.90	746.37	-1188.83	-5746.75	-114.32	5998.90	50.75	120.47	PASS	
1625.00†	1605.03	-171.18	125.31	804.52	825.01	-1197.38	-5755.77	-114.40	6020.68	50.89	120.57	PASS	
1725.00†	1702.88	-187.82	137.49	875.39	894.97	-1205.42	-5763.70	-114.47	6042.54	51.03	120.67	PASS	
1825.00†	1800.73	-204.47	149.67	927.19	946.03	-1211.72	-5769.77	-114.52	6065.06	50.85	120.94	PASS	
1925.00†	1898.58	-221.11	161.86	958.64	976.96	-1215.76	-5773.72	-114.54	6088.50	50.86	121.38	PASS	
2025.00†	1996.43	-237.75	174.04	989.94	1007.69	-1219.99	-5777.96	-114.57	6112.99	50.88	121.82	PASS	
2125.00†	2094.28	-254.40	186.22	1023.77	1040.82	-1224.78	-5782.86	-114.59	6138.52	50.92	122.23	PASS	
2225.00†	2192.13	-271.04	198.41	1071.12	1087.09	-1231.74	-5790.09	-114.62	6164.92	51.01	122.55	PASS	
2325.00†	2289.98	-287.68	210.59	1119.11	1133.90	-1239.03	-5797.76	-114.65	6192.08	51.11	122.84	PASS	
2425.00†	2387.83	-304.33	222.77	1171.47	1184.84	-1247.49	-5806.41	-114.68	6219.95	51.24	123.07	PASS	
2525.00†	2485.68	-320.97	234.96	1218.00	1229.98	-1255.57	-5814.31	-114.70	6248.52	51.37	123.32	PASS	
2625.00†	2583.53	-337.62	247.14	1253.29	1264.11	-1261.99	-5820.58	-114.72	6277.95	51.48	123.64	PASS	
2725.00†	2681.38	-354.26	259.33	1288.39	1297.95	-1268.63	-5827.10	-114.73	6308.29	51.59	123.95	PASS	
2825.00†	2779.23	-370.90	271.51	1671.32	1668.64	-1339.66	-5891.34	-114.85	6336.61	52.99	121.19	PASS	
2925.00†	2877.08	-387.55	283.69	1730.37	1725.81	-1351.67	-5899.91	-114.86	6363.32	53.27	121.05	PASS	
3025.00†	2974.93	-404.19	295.88	1789.98	1783.55	-1363.35	-5909.04	-114.87	6390.64	53.56	120.90	PASS	
3125.00†	3072.78	-420.83	308.06	2003.18	1990.79	-1401.66	-5941.14	-114.94	6417.57	54.51	119.27	PASS	
3225.00†	3170.63	-437.48	320.24	2052.78	2039.02	-1410.77	-5948.25	-114.95	6443.74	54.81	119.09	PASS	
3325.00†	3268.48	-454.12	332.43	2117.93	2102.30	-1422.89	-5957.96	-114.97	6470.51	55.19	118.75	PASS	
3425.00†	3366.33	-470.77	344.61	2224.16	2205.50	-1442.17	-5974.20	-115.01	6497.58	55.78	117.98	PASS	
3525.00†	3464.18	-487.41	356.79	2318.67	2297.35	-1459.32	-5988.38	-115.03	6524.36	56.33	117.29	PASS	
3625.00†	3562.03	-504.05	368.98	2361.47	2338.90	-1467.26	-5994.89	-115.05	6551.54	56.66	117.09	PASS	
3725.00†	3659.88	-520.70	381.16	2386.43	2363.11	-1471.71	-5999.01	-115.05	6579.71	56.90	117.07	PASS	
3825.00†	3757.73	-537.34	393.34	2411.20	2387.12	-1475.92	-6003.40	-115.07	6608.92	57.15	117.07	PASS	
3925.00†	3855.57	-553.98	405.53	2435.79	2410.93	-1479.92	-6008.05	-115.08	6639.15	57.41	117.08	PASS	
4025.00†	3953.42	-570.63	417.71	2588.77	2559.35	-1503.22	-6036.88	-115.17	6668.95	58.32	115.74	PASS	
4125.00†	4051.27	-587.27	429.90	2657.35	2625.78	-1514.32	-6049.82	-115.21	6699.11	58.83	115.25	PASS	
4225.00†	4149.12	-603.92	442.08	2969.77	2929.25	-1563.95	-6104.83	-115.37	6728.43	60.65	112.24	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 88 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. HOOD 20-42-12 AWB Offset Wellpath: EX. HOOD 20-42-12 AWP

Facility: SEC.20-T06N-R66W		Slot: SLOT#04 EX. HOOD 20-42-12 (2000'FNL & 657'FEL, PR, NB/CD)				Well: EX. HOOD 20-42-12		Threshold Value=1.00		† = interpolated/extrapolated station		
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status
4325.00†	4246.97	-620.56	454.26	3059.77	3017.13	-1576.82	-6119.36	115.43	6755.70	61.31	111.47	PASS
4425.00†	4344.82	-637.20	466.45	3217.48	3171.16	-1599.68	-6144.37	115.53	6782.82	62.35	110.03	PASS
4525.00†	4442.67	-653.85	478.63	3376.24	3326.38	-1623.62	-6167.51	115.61	6808.65	63.42	108.56	PASS
4625.00†	4540.52	-670.49	490.81	3492.27	3439.93	-1641.07	-6183.83	115.67	6834.05	64.28	107.50	PASS
4725.00†	4638.37	-687.13	503.00	3547.40	3493.87	-1649.26	-6191.71	115.70	6859.64	64.81	106.99	PASS
4825.00†	4736.22	-703.78	515.18	3602.32	3547.58	-1657.29	-6199.90	115.73	6885.81	65.36	106.50	PASS
4925.00†	4834.07	-720.42	527.36	3657.03	3601.05	-1665.16	-6208.42	115.77	6912.57	65.90	106.02	PASS
5025.00†	4931.92	-737.07	539.55	3721.32	3663.82	-1674.38	-6218.79	115.81	6939.87	66.52	105.44	PASS
5125.00†	5029.77	-753.71	551.73	3791.60	3732.35	-1684.94	-6230.32	115.84	6967.55	67.18	104.81	PASS
5225.00†	5127.62	-770.35	563.91	4887.34	4815.36	-1792.64	-6342.35	116.80	6988.49	73.06	96.59	PASS
5325.00†	5225.47	-787.00	576.10	5006.89	4934.73	-1797.45	-6346.84	116.95	7002.33	73.93	95.63	PASS
5425.00†	5323.32	-803.64	588.28	5131.36	5059.03	-1802.42	-6351.13	117.10	7015.90	74.82	94.65	PASS
5525.00†	5421.17	-820.28	600.47	5273.57	5201.09	-1807.30	-6355.38	117.28	7028.97	75.80	93.60	PASS
5625.00†	5519.02	-836.93	612.65	5406.93	5334.37	-1810.83	-6358.71	117.46	7041.48	76.74	92.60	PASS
5725.00†	5616.87	-853.57	624.83	5505.68	5433.06	-1813.11	-6361.00	117.59	7053.82	77.55	91.78	PASS
5825.00†	5714.72	-870.22	637.02	5604.40	5531.73	-1815.30	-6363.29	117.72	7066.18	78.37	90.98	PASS
5925.00†	5812.57	-886.86	649.20	5705.43	5632.71	-1817.43	-6365.63	117.86	7078.57	79.20	90.18	PASS
6025.00†	5910.42	-903.50	661.38	5811.41	5738.65	-1819.11	-6368.06	118.01	7090.90	80.05	89.37	PASS
6125.00†	6008.27	-920.15	673.57	5917.18	5844.38	-1820.10	-6370.45	118.16	7103.17	80.90	88.57	PASS
6225.00†	6106.12	-936.79	685.75	6020.91	5948.09	-1820.51	-6372.76	118.31	7115.38	81.75	87.79	PASS
6325.00†	6203.97	-953.43	697.93	6123.56	6050.71	-1820.71	-6375.00	118.46	7127.56	82.60	87.03	PASS
6425.00†	6301.82	-970.08	710.12	6226.16	6153.29	-1820.74	-6377.18	118.61	7139.71	83.44	86.29	PASS
6525.00†	6399.66	-986.72	722.30	6315.51	6242.62	-1820.66	-6379.10	118.75	7151.93	84.25	85.60	PASS
6605.93	6478.85	-1000.19	732.16	6385.97	6313.06	-1820.55	-6380.71	118.85	7161.95	84.89	85.06	PASS
6625.00†	6497.54	-1003.38	734.20	6402.60	6329.68	-1820.52	-6381.11	111.61	7164.04	85.05	84.94	PASS
6725.00†	6595.97	-1020.39	735.57	6490.35	6417.41	-1820.32	-6383.27	63.08	7165.86	85.96	84.05	PASS
6825.00†	6693.34	-1037.59	721.30	6593.63	6520.66	-1819.92	-6385.91	32.50	7152.21	87.35	82.54	PASS
6925.00†	6787.24	-1054.57	691.74	6704.25	6631.24	-1819.02	-6388.56	19.57	7123.16	88.82	80.83	PASS
7025.00†	6875.37	-1070.91	647.62	6808.19	6735.14	-1817.70	-6390.89	13.05	7079.40	90.07	79.22	PASS
7125.00†	6955.55	-1086.20	590.03	6868.71	6795.64	-1816.78	-6392.27	8.97	7022.24	90.98	77.79	PASS
7225.00†	7025.81	-1100.06	520.38	6921.41	6848.32	-1815.96	-6393.64	5.89	6953.25	91.70	76.41	PASS
7325.00†	7084.42	-1112.16	440.40	6966.05	6892.93	-1815.26	-6394.91	2.96	6874.04	92.24	75.09	PASS
7425.00†	7129.94	-1122.20	352.04	7001.50	6928.36	-1814.69	-6395.99	-0.75	6786.47	92.62	73.83	PASS
7525.00†	7161.25	-1129.93	257.49	7026.84	6953.68	-1814.28	-6396.81	-7.50	6692.62	92.85	72.62	PASS
7625.00†	7177.57	-1135.16	159.08	7041.33	6968.17	-1814.04	-6397.29	-28.32	6594.75	92.96	71.47	PASS
7682.94	7180.00	-1136.99	101.24	7044.57	6971.41	-1813.99	-6397.40	-70.02	6537.13	92.99	70.83	PASS
7725.00†	7179.88	-1138.00	59.19	7045.53	6972.36	-1813.98	-6397.43	-70.11	6495.22	92.99	70.37	PASS
7825.00†	7179.59	-1140.39	-40.78	7047.82	6974.65	-1813.94	-6397.51	-70.33	6395.59	93.01	69.28	PASS
7925.00†	7179.29	-1142.78	-140.75	7050.13	6976.96	-1813.90	-6397.58	-70.56	6295.98	93.03	68.19	PASS
8025.00†	7179.00	-1145.17	-240.72	7052.46	6979.29	-1813.86	-6397.66	-70.78	6196.37	93.06	67.09	PASS
8125.00†	7178.71	-1147.56	-340.69	7054.80	6981.63	-1813.82	-6397.74	-71.01	6096.77	93.10	65.98	PASS
8225.00†	7178.42	-1149.95	-440.66	7057.17	6984.00	-1813.78	-6397.83	-71.24	5997.19	93.14	64.87	PASS
8325.00†	7178.13	-1152.34	-540.63	7059.55	6986.38	-1813.75	-6397.91	-71.47	5897.62	93.19	63.76	PASS
8425.00†	7177.84	-1154.73	-640.61	7061.96	6988.78	-1813.71	-6397.99	-71.71	5798.06	93.25	62.65	PASS
8525.00†	7177.55	-1157.12	-740.58	7064.38	6991.20	-1813.67	-6398.08	-71.95	5698.51	93.31	61.53	PASS

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 89 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. HOOD 20-42-12 AWB Offset Wellpath: EX. HOOD 20-42-12 AWP

Facility: SEC.20-T06N-R66W Slot: SLOT#04 EX. HOOD 20-42-12 (2000'FNL & 657'FEL, PR, NB/CD) Well: EX. HOOD 20-42-12 Threshold Value=1.00 † = interpolated/extrapolated station															
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status			
8625.00†	7177.25	-1159.52	-840.55	7066.82	6993.64	-1813.63	-6398.16	-72.19	5598.99	93.39	60.40	PASS			
8725.00†	7176.96	-1161.91	-940.52	7069.29	6996.10	-1813.58	-6398.25	-72.44	5499.47	93.48	59.28	PASS			
8825.00†	7176.67	-1164.30	-1040.49	7071.77	6998.59	-1813.54	-6398.33	-72.68	5399.98	93.57	58.14	PASS			
8925.00†	7176.38	-1166.69	-1140.46	7074.27	7001.09	-1813.50	-6398.42	-72.93	5300.50	93.68	57.01	PASS			
9025.00†	7176.09	-1169.08	-1240.43	7076.80	7003.61	-1813.46	-6398.51	-73.19	5201.04	93.80	55.86	PASS			
9125.00†	7175.80	-1171.47	-1340.40	7079.34	7006.15	-1813.42	-6398.60	-73.44	5101.59	93.93	54.72	PASS			
9225.00†	7175.51	-1173.86	-1440.37	7081.91	7008.72	-1813.38	-6398.69	-73.70	5002.17	94.08	53.56	PASS			
9325.00†	7175.21	-1176.25	-1540.34	7084.50	7011.31	-1813.33	-6398.79	-73.96	4902.77	94.25	52.41	PASS			
9425.00†	7174.92	-1178.64	-1640.32	7087.11	7013.91	-1813.29	-6398.88	-74.22	4803.40	94.43	51.25	PASS			
9525.00†	7174.63	-1181.03	-1740.29	7089.74	7016.54	-1813.25	-6398.98	-74.49	4704.05	94.63	50.08	PASS			
9625.00†	7174.34	-1183.42	-1840.26	7092.40	7019.20	-1813.20	-6399.07	-74.76	4604.72	94.85	48.91	PASS			
9725.00†	7174.05	-1185.82	-1940.23	7095.07	7021.87	-1813.16	-6399.17	-75.04	4505.43	95.09	47.73	PASS			
9825.00†	7173.76	-1188.21	-2040.20	7098.92	7025.71	-1813.09	-6399.31	-75.43	4406.16	95.37	46.54	PASS			
9925.00†	7173.47	-1190.60	-2140.17	7103.31	7030.10	-1813.02	-6399.47	-75.88	4306.92	95.67	45.35	PASS			
10025.00†	7173.17	-1192.99	-2240.14	7107.62	7034.41	-1812.95	-6399.62	-76.33	4207.72	96.00	44.15	PASS			
10125.00†	7172.88	-1195.38	-2340.11	7111.87	7038.66	-1812.88	-6399.77	-76.77	4108.55	96.36	42.95	PASS			
10225.00†	7172.59	-1197.77	-2440.08	7116.05	7042.83	-1812.81	-6399.92	-77.20	4009.42	96.76	41.74	PASS			
10325.00†	7172.30	-1200.16	-2540.05	7120.16	7046.94	-1812.74	-6400.07	-77.63	3910.33	97.19	40.52	PASS			
10425.00†	7172.01	-1202.55	-2640.03	7124.21	7050.99	-1812.68	-6400.21	-78.06	3811.28	97.67	39.30	PASS			
10525.00†	7171.72	-1204.94	-2740.00	7128.20	7054.97	-1812.62	-6400.35	-78.47	3712.28	98.20	38.07	PASS			
10625.00†	7171.42	-1207.33	-2839.97	7132.13	7058.90	-1812.55	-6400.48	-78.89	3613.34	98.78	36.84	PASS			
10725.00†	7171.13	-1209.72	-2939.94	7136.99	7062.76	-1812.49	-6400.61	-79.30	3514.45	99.41	35.60	PASS			
10825.00†	7170.84	-1212.11	-3039.91	7139.80	7066.56	-1812.43	-6400.74	-79.70	3415.62	100.11	34.36	PASS			
10925.00†	7170.55	-1214.51	-3139.88	7143.55	7070.31	-1812.38	-6400.87	-80.10	3316.86	100.88	33.11	PASS			
11025.00†	7170.26	-1216.90	-3239.85	7147.24	7074.00	-1812.32	-6400.99	-80.50	3218.17	101.72	31.85	PASS			
11125.00†	7169.97	-1219.29	-3339.82	7150.88	7077.64	-1812.26	-6401.11	-80.89	3119.56	102.65	30.59	PASS			
11225.00†	7169.68	-1221.68	-3439.79	7154.46	7081.22	-1812.21	-6401.23	-81.27	3021.04	103.68	29.33	PASS			
11325.00†	7169.38	-1224.07	-3539.76	7158.00	7084.75	-1812.16	-6401.35	-81.65	2922.61	104.81	28.07	PASS			
11425.00†	7169.09	-1226.46	-3639.74	7161.48	7088.23	-1812.10	-6401.46	-82.02	2824.29	106.07	26.80	PASS			
11525.00†	7168.80	-1228.85	-3739.71	7164.91	7091.65	-1812.05	-6401.57	-82.40	2726.10	107.46	25.53	PASS			
11625.00†	7168.51	-1231.24	-3839.68	7168.29	7095.03	-1812.00	-6401.68	-82.76	2628.03	109.00	24.26	PASS			
11725.00†	7168.22	-1233.63	-3939.65	7171.62	7098.36	-1811.95	-6401.79	-83.12	2530.11	110.70	23.00	PASS			
11825.00†	7167.93	-1236.02	-4039.62	7174.91	7101.65	-1811.90	-6401.89	-83.48	2432.36	112.60	21.73	PASS			
11925.00†	7167.64	-1238.41	-4139.59	7178.15	7104.89	-1811.86	-6401.99	-83.83	2334.79	114.71	20.47	PASS			
12025.00†	7167.34	-1240.81	-4239.56	7181.34	7108.08	-1811.81	-6402.09	-84.18	2237.43	117.07	19.22	PASS			
12125.00†	7167.05	-1243.20	-4339.53	7184.49	7111.23	-1811.77	-6402.19	-84.52	2140.31	119.70	17.98	PASS			
12225.00†	7166.76	-1245.59	-4439.50	7187.60	7114.33	-1811.72	-6402.29	-84.86	2043.47	122.66	16.75	PASS			
12325.00†	7166.47	-1247.98	-4539.47	7190.66	7117.40	-1811.68	-6402.38	-85.20	1946.94	125.97	15.54	PASS			
12425.00†	7166.18	-1250.37	-4639.45	7193.69	7120.42	-1811.63	-6402.47	-85.53	1850.78	129.70	14.34	PASS			
12525.00†	7165.89	-1252.76	-4739.42	7196.67	7123.40	-1811.59	-6402.56	-85.86	1755.04	133.91	13.17	PASS			
12625.00†	7165.60	-1255.15	-4839.39	7199.62	7126.34	-1811.55	-6402.65	-86.18	1659.80	138.68	12.03	PASS			
12725.00†	7165.30	-1257.54	-4939.36	7202.52	7129.25	-1811.51	-6402.74	-86.50	1565.14	144.10	10.91	PASS			
12825.00†	7165.01	-1259.93	-5039.33	7205.39	7132.11	-1811.47	-6402.82	-86.81	1471.19	150.29	9.83	PASS			
12925.00†	7164.72	-1262.32	-5139.30	7208.21	7134.94	-1811.43	-6402.91	-87.12	1378.08	157.37	8.79	PASS			
13025.00†	7164.43	-1264.71	-5239.27	7211.01	7137.73	-1811.39	-6402.99	-87.43	1286.01	165.53	7.80	PASS			

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 90 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. HOOD 20-42-12 AWB Offset Wellpath: EX. HOOD 20-42-12 AWP

Facility: SEC.20-T06N-R66W			Slot: SLOT#04 EX. HOOD 20-42-12 (2000'FNL & 657'FEL, PR, NB/CD)			Well: EX. HOOD 20-42-12		Threshold Value=1.00		† = interpolated/extrapolated station		
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status
13125.00†	7164.14	-1267.10	-5339.24	7213.76	7140.48	-1811.36	-6403.07	-87.73	1195.20	174.95	6.86	PASS
13225.00†	7163.85	-1269.50	-5439.21	7216.48	7143.20	-1811.32	-6403.15	-88.03	1105.97	185.89	5.97	PASS
13325.00†	7163.56	-1271.89	-5539.18	7219.17	7145.88	-1811.28	-6403.23	-88.33	1018.74	198.63	5.14	PASS
13425.00†	7163.26	-1274.28	-5639.16	7221.82	7148.53	-1811.25	-6403.30	-88.62	934.06	213.49	4.39	PASS
13525.00†	7162.97	-1276.67	-5739.13	7224.43	7151.15	-1811.21	-6403.38	-88.91	852.71	230.83	3.70	PASS
13625.00†	7162.68	-1279.06	-5839.10	7227.02	7153.73	-1811.18	-6403.45	-89.20	775.71	250.94	3.10	PASS
13725.00†	7162.39	-1281.45	-5939.07	7229.57	7156.28	-1811.14	-6403.53	-89.48	704.51	273.92	2.58	PASS
13825.00†	7162.10	-1283.84	-6039.04	7232.09	7158.80	-1811.11	-6403.60	-89.76	641.03	299.36	2.14	PASS
13925.00†	7161.81	-1286.23	-6139.01	7234.58	7161.29	-1811.08	-6403.67	-90.03	587.80	325.90	1.81	PASS
14025.00†	7161.51	-1288.62	-6238.98	7237.04	7163.75	-1811.04	-6403.73	-90.30	547.79	350.71	1.56	PASS
14032.94	7161.49	-1288.81	-6246.92	7237.24	7163.94	-1811.04	-6403.74	-90.33	545.27	352.49	1.55	PASS
14125.00†	7161.22	-1288.79	-6338.97	7239.50	7166.21	-1811.01	-6403.80	-90.56	526.25	369.67	1.42	PASS
14166.46†	7161.10	-1287.34	-6380.41	7240.48	7167.19	-1811.00	-6403.83	-90.67	524.22	374.73	1.40	PASS
14200.07†	7161.00	-1285.50	-6413.96	7241.37	7168.07	-1810.99	-6403.85	-90.76	525.64	377.39	1.39	PASS
14211.94	7160.97	-1284.71	-6425.81	7241.66	7168.37	-1810.98	-6403.86	-90.79	526.79	378.01	1.39	PASS
14225.00†	7160.93	-1283.79	-6438.83	7241.99	7168.70	-1810.98	-6403.87	-90.83	528.40	378.50	1.40	PASS
14325.00†	7160.64	-1276.82	-6538.59	7244.47	7171.18	-1810.95	-6403.94	-91.10	550.94	376.12	1.47	PASS
14411.94	7160.39	-1270.75	-6625.32	7246.61	7173.31	-1810.92	-6404.00	-91.33	583.89	366.86	1.59	PASS
14425.00†	7160.35	-1269.89	-6638.35	7246.92	7173.63	-1810.92	-6404.01	-91.36	589.75	365.05	1.62	PASS
14525.00†	7160.06	-1266.21	-6738.27	7249.31	7176.01	-1810.89	-6404.07	-91.58	639.23	348.62	1.84	PASS
14625.00†	7159.76	-1267.77	-6838.25	7251.60	7178.30	-1810.86	-6404.13	-91.77	695.52	329.33	2.11	PASS
14725.00†	7159.47	-1274.55	-6938.00	7253.80	7180.50	-1810.83	-6404.19	-91.92	756.96	308.90	2.45	PASS
14825.00†	7159.17	-1286.55	-7037.27	7255.89	7182.59	-1810.80	-6404.25	-92.04	822.26	288.34	2.86	PASS
14925.00†	7158.88	-1303.73	-7135.77	7257.89	7184.59	-1810.78	-6404.30	-92.13	890.40	268.22	3.33	PASS
14937.60	7158.84	-1306.26	-7148.12	7258.13	7184.83	-1810.78	-6404.31	-92.14	899.15	265.73	3.39	PASS
15025.00†	7158.59	-1324.09	-7233.68	7259.81	7186.51	-1810.75	-6404.35	-92.29	961.98	249.22	3.87	PASS
15037.60	7158.55	-1326.66	-7246.02	7260.05	7186.75	-1810.75	-6404.36	-92.31	971.36	246.96	3.94	PASS

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: EX. HOOD 20-42-12 AWB Offset Wellpath: EX. HOOD 20-42-12 AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

WELLPATH COMPOSITION - Offset Wellbore: EX. HOOD 20-42-12 AWB Offset Wellpath: EX. HOOD 20-42-12 AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
0.00	7433.00	ISWWSA MWD, Rev. 4 (Standard)	MS ENERGY SERVICES MWD SURVEYS FROM COGCC <141-7433>	EX. HOOD 20-42-12 AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: EX. HOOD 20-42-12 AWB Offset Wellpath: EX. HOOD 20-42-12 AWP

MD Reference: Rig on SLOT#04 EX. HOOD 20-42-12 (2000'FNL & 657'FEL, PR, NB/CD) (RT)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	0.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 91 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: LEFFLER 8N-23B-L AWB Offset Wellpath: LEFFLER 8N-23B-L AWP

Facility: SEC.21-T06N-R66W		Slot: SLOT#10 LEFFLER 8N-23B-L (1981'FNL & 275'FEL SEC.21)		Well: LEFFLER 8N-23B-L		Threshold Value=1.00 † = interpolated/extrapolated station							
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASH [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	22.00	25.00	-1043.79	-23.65	-178.70	1044.06	1.26	3476.98	PASS	
125.00†	125.00	0.00	0.00	135.94	138.93	-1042.90	-23.02	-178.74	1043.25	2.22	955.30	PASS	
225.00†	225.00	0.00	0.00	230.67	233.65	-1041.72	-22.36	-178.77	1042.00	2.87	594.92	PASS	
300.00	300.00	0.00	0.00	293.88	296.86	-1041.57	-22.02	-178.79	1041.81	3.23	494.22	PASS	
325.00†	325.00	-0.09	0.06	319.11	322.09	-1041.65	-21.93	37.42	1041.80	3.38	462.49	PASS	
425.00†	424.96	-2.20	1.61	419.68	422.66	-1041.89	-22.01	37.53	1039.96	4.13	345.66	PASS	
525.00†	524.77	-7.13	5.22	521.65	524.63	-1042.05	-22.37	37.82	1035.29	5.20	253.71	PASS	
625.00†	624.30	-14.86	10.88	621.75	624.73	-1041.95	-22.73	38.26	1027.64	6.09	206.76	PASS	
725.00†	723.44	-25.39	18.59	718.78	721.76	-1042.00	-22.93	38.84	1017.46	6.90	176.09	PASS	
825.00†	822.07	-38.71	28.34	818.93	821.91	-1042.11	-23.49	39.64	1004.74	7.67	153.28	PASS	
895.18	890.91	-49.71	36.39	887.84	890.81	-1042.09	-23.90	40.29	994.21	8.16	141.12	PASS	
925.00†	920.09	-54.67	40.02	916.87	919.85	-1042.08	-24.07	40.53	989.49	8.33	137.12	PASS	
1025.00†	1017.94	-71.32	52.20	1015.69	1018.67	-1042.01	-24.60	41.35	973.73	8.87	125.60	PASS	
1125.00†	1115.79	-87.96	64.39	1110.50	1113.47	-1042.04	-25.19	42.17	958.28	9.42	115.43	PASS	
1225.00†	1213.64	-104.60	76.57	1206.56	1209.53	-1042.36	-25.42	43.00	943.29	9.99	106.28	PASS	
1325.00†	1311.48	-121.25	88.76	1303.22	1306.19	-1042.86	-25.17	43.83	928.64	10.58	98.11	PASS	
1425.00†	1409.33	-137.89	100.94	1398.78	1401.75	-1043.63	-24.53	44.65	914.42	11.17	90.89	PASS	
1525.00†	1507.18	-154.53	113.12	1498.73	1501.69	-1044.53	-24.11	45.54	900.53	11.79	84.31	PASS	
1625.00†	1605.03	-171.18	125.31	1605.54	1608.50	-1044.70	-24.03	46.56	886.20	12.44	78.22	PASS	
1725.00†	1702.88	-187.82	137.49	1708.62	1711.58	-1043.96	-23.59	47.57	871.20	13.11	72.60	PASS	
1825.00†	1800.73	-204.47	149.67	1807.54	1810.49	-1043.04	-22.71	48.54	856.16	13.10	69.03	PASS	
1925.00†	1898.58	-221.11	161.86	1894.51	1897.44	-1042.40	-21.50	49.39	841.51	13.30	66.77	PASS	
2025.00†	1996.43	-237.75	174.04	1947.23	1950.12	-1043.67	-22.63	50.02	830.86	13.64	64.21	PASS	
2125.00†	2094.28	-254.40	186.22	2018.72	2021.29	-1048.25	-27.65	51.07	825.39	14.26	60.87	PASS	
2225.00†	2192.13	-271.04	198.41	2110.14	2112.11	-1054.82	-35.72	52.51	821.91	14.79	58.32	PASS	
2325.00†	2289.98	-287.68	210.59	2218.33	2219.62	-1062.73	-44.91	54.21	819.10	15.12	56.80	PASS	
2425.00†	2387.83	-304.33	222.77	2319.22	2320.08	-1069.25	-51.44	55.68	815.41	15.58	54.80	PASS	
2525.00†	2485.68	-320.97	234.96	2420.66	2421.10	-1075.60	-58.10	57.19	812.10	16.08	52.79	PASS	
2625.00†	2583.53	-337.62	247.14	2523.84	2523.90	-1081.26	-65.12	58.78	808.75	16.67	50.64	PASS	
2725.00†	2681.38	-354.26	259.33	2622.73	2622.42	-1086.02	-72.11	60.35	805.48	17.31	48.47	PASS	
2825.00†	2779.23	-370.90	271.51	2715.98	2715.32	-1090.89	-78.61	61.81	803.15	18.01	46.39	PASS	
2925.00†	2877.08	-387.55	283.69	2813.48	2812.42	-1096.12	-85.67	63.37	801.68	18.78	44.33	PASS	
3025.00†	2974.93	-404.19	295.88	2911.09	2909.64	-1101.31	-92.57	64.92	800.71	19.60	42.36	PASS	
3125.00†	3072.78	-420.83	308.06	3007.88	3006.05	-1106.69	-99.32	66.45	800.50	20.46	40.49	PASS	
3225.00†	3170.63	-437.48	320.24	3106.10	3103.89	-1112.16	-106.04	67.99	800.86	21.37	38.73	PASS	
3325.00†	3268.48	-454.12	332.43	3205.08	3202.49	-1117.66	-112.65	69.54	801.71	22.32	37.07	PASS	
3425.00†	3366.33	-470.77	344.61	3303.11	3300.18	-1123.25	-118.73	71.03	802.99	23.29	35.53	PASS	
3525.00†	3464.18	-487.41	356.79	3400.03	3396.75	-1129.02	-124.48	72.47	804.88	24.28	34.11	PASS	
3625.00†	3562.03	-504.05	368.98	3497.96	3494.33	-1134.75	-130.48	73.94	807.35	25.30	32.80	PASS	
3725.00†	3659.88	-520.70	381.16	3595.96	3591.97	-1139.86	-137.18	75.46	810.34	26.34	31.58	PASS	
3825.00†	3757.73	-537.34	393.34	3691.21	3686.84	-1144.67	-144.09	76.96	814.07	27.39	30.49	PASS	
3925.00†	3855.57	-553.98	405.53	3791.76	3786.99	-1149.92	-151.30	78.51	818.47	28.48	29.45	PASS	
4025.00†	3953.42	-570.63	417.71	3894.23	3889.14	-1154.91	-157.71	80.05	822.58	29.59	28.46	PASS	
4125.00†	4051.27	-587.27	429.90	3988.29	3982.88	-1159.41	-163.96	81.47	827.46	30.66	27.60	PASS	
4225.00†	4149.12	-603.92	442.08	4087.06	4081.31	-1164.44	-170.47	82.92	833.07	31.76	26.80	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 92 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: LEFFLER 8N-23B-L AWB Offset Wellpath: LEFFLER 8N-23B-L AWP

Facility: SEC.21-T06N-R66W Slot: SLOT#10 LEFFLER 8N-23B-L (1981'FNL & 275'FEL SEC.21) Well: LEFFLER 8N-23B-L Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
4325.00†	4246.97	-620.56	454.26	4187.73	4181.67	-1169.76	-176.44	84.34	838.85	32.88	26.05	PASS	
4425.00†	4344.82	-637.20	466.45	4285.20	4278.84	-1174.99	-181.92	85.68	844.95	33.98	25.38	PASS	
4525.00†	4442.67	-653.85	478.63	4380.04	4373.38	-1180.12	-187.47	86.98	851.74	35.07	24.77	PASS	
4625.00†	4540.52	-670.49	490.81	4474.08	4467.09	-1185.07	-193.55	88.27	859.38	36.15	24.23	PASS	
4725.00†	4638.37	-687.13	503.00	4568.31	4560.96	-1189.76	-200.32	89.58	867.92	37.25	23.73	PASS	
4825.00†	4736.22	-703.78	515.18	4670.06	4662.33	-1195.01	-207.35	90.95	876.82	38.38	23.25	PASS	
4925.00†	4834.07	-720.42	527.36	4766.22	4758.12	-1200.76	-213.54	92.16	886.25	39.48	22.84	PASS	
5025.00†	4931.92	-737.07	539.55	4941.50	4933.07	-1207.63	-219.71	94.34	893.26	41.05	22.12	PASS	
5125.00†	5029.77	-753.71	551.73	5037.11	5028.68	-1207.67	-219.74	95.59	895.13	42.26	21.52	PASS	
5225.00†	5127.62	-770.35	563.91	5136.33	5127.90	-1207.65	-219.77	96.90	897.43	43.37	21.02	PASS	
5325.00†	5225.47	-787.00	576.10	5233.89	5225.46	-1207.63	-219.77	98.17	900.19	44.48	20.55	PASS	
5425.00†	5323.32	-803.64	588.28	5331.51	5323.08	-1207.52	-219.84	99.44	903.42	45.58	20.12	PASS	
5525.00†	5421.17	-820.28	600.47	5429.71	5421.28	-1207.53	-219.86	100.71	907.13	46.68	19.72	PASS	
5625.00†	5519.02	-836.93	612.65	5527.66	5519.23	-1207.57	-219.80	101.95	911.24	47.78	19.34	PASS	
5725.00†	5616.87	-853.57	624.83	5625.01	5616.58	-1207.58	-219.80	103.18	915.82	48.88	19.00	PASS	
5825.00†	5714.72	-870.22	637.02	5723.10	5714.67	-1207.53	-219.85	104.41	920.87	49.97	18.68	PASS	
5925.00†	5812.57	-886.86	649.20	5821.00	5812.57	-1207.53	-219.85	105.63	926.32	51.07	18.31	PASS	
6025.00†	5910.42	-903.50	661.38	5918.62	5910.19	-1207.55	-219.86	106.82	932.22	52.15	18.11	PASS	
6125.00†	6008.27	-920.15	673.57	6017.21	6008.78	-1207.50	-219.85	108.01	938.49	53.24	17.85	PASS	
6225.00†	6106.12	-936.79	685.75	6114.78	6106.35	-1207.50	-219.82	109.18	945.17	54.33	17.61	PASS	
6325.00†	6203.97	-953.43	697.93	7685.21	7023.65	-1194.32	712.23	77.33	854.46	41.74	20.81	PASS	
6425.00†	6301.82	-970.08	710.12	7696.64	7023.58	-1193.86	723.65	73.62	755.78	42.32	18.14	PASS	
6525.00†	6399.66	-986.72	722.30	7707.58	7023.50	-1193.44	734.58	69.64	657.31	43.01	15.52	PASS	
6605.93	6478.85	-1000.19	732.16	7716.08	7023.44	-1193.11	743.08	66.23	577.85	43.68	13.43	PASS	
6625.00†	6497.54	-1003.38	734.20	7717.81	7023.43	-1193.05	744.81	50.49	559.15	43.86	12.94	PASS	
6725.00†	6595.97	-1020.39	735.57	7717.88	7023.43	-1193.05	744.87	-42.09	461.11	44.91	10.41	PASS	
6825.00†	6693.34	-1037.59	721.30	7702.69	7023.54	-1193.62	729.70	-92.84	365.30	46.44	7.97	PASS	
6925.00†	6787.24	-1054.57	691.74	7671.56	7023.71	-1194.87	698.59	-110.51	275.05	49.11	5.67	PASS	
7025.00†	6875.37	-1070.91	647.62	7626.26	7023.84	-1196.81	653.33	-113.27	194.75	54.12	3.63	PASS	
7125.00†	6955.55	-1086.20	590.03	7567.50	7023.90	-1199.32	594.63	-104.65	132.25	63.34	2.10	PASS	
7225.00†	7025.81	-1100.06	520.38	7495.60	7024.15	-1201.72	522.77	-83.77	101.70	71.88	1.42	PASS	
7246.20†	7039.26	-1102.78	504.22	7478.74	7024.20	-1202.07	505.92	-78.08	100.43	72.00	1.40	PASS	
7251.30†	7042.42	-1103.43	500.28	7474.72	7024.21	-1202.13	501.89	-76.73	100.38	71.92	1.40	PASS	
7325.00†	7084.42	-1112.16	440.40	7413.65	7024.15	-1202.45	440.83	-57.39	108.56	67.02	1.63	PASS	
7425.00†	7129.94	-1122.20	352.04	7332.96	7020.32	-1201.04	360.26	-38.15	135.28	58.63	2.32	PASS	
7525.00†	7161.25	-1129.93	257.49	7264.55	7008.91	-1199.10	292.89	-26.92	171.01	54.71	3.15	PASS	
7625.00†	7177.57	-1135.16	159.08	7195.20	6988.46	-1197.02	226.70	-19.43	210.15	54.23	3.91	PASS	
7682.94	7180.00	-1136.99	101.24	7154.33	6973.19	-1195.75	188.81	-16.37	232.15	54.62	4.29	PASS	
7725.00†	7179.88	-1138.00	59.19	7122.90	6960.22	-1194.46	160.22	-14.98	248.29	54.66	4.59	PASS	
7825.00†	7179.59	-1140.39	-40.78	7054.80	6928.90	-1190.44	99.90	-12.01	291.79	55.15	5.35	PASS	
7925.00†	7179.29	-1142.78	-140.75	6997.78	6898.40	-1186.80	51.88	-9.80	343.44	56.33	6.16	PASS	
8025.00†	7179.00	-1145.17	-240.72	6946.54	6867.57	-1184.07	11.07	-8.19	402.37	57.55	7.07	PASS	
8125.00†	7178.71	-1147.56	-340.69	6900.55	6837.38	-1182.92	-23.59	-7.15	467.24	58.74	8.04	PASS	
8225.00†	7178.42	-1149.95	-440.66	6861.82	6810.12	-1182.86	-51.10	-6.52	537.11	59.90	9.06	PASS	
8325.00†	7178.13	-1152.34	-540.63	6827.81	6784.78	-1183.38	-73.76	-6.10	611.28	60.91	10.14	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 93 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: LEFFLER 8N-23B-L AWB Offset Wellpath: LEFFLER 8N-23B-L AWP

Facility: SEC.21-T06N-R66W Slot: SLOT#10 LEFFLER 8N-23B-L (1981'FNL & 275'FEL SEC.21) Well: LEFFLER 8N-23B-L Threshold Value=1.00 † = Interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
8425.00†	7177.84	-1154.73	-640.61	6798.14	6761.65	-1184.26	-92.33	-5.83	688.98	61.81	11.26	PASS	
8525.00†	7177.55	-1157.12	-740.58	6772.67	6741.05	-1185.14	-107.28	-5.62	769.66	62.63	12.42	PASS	
8625.00†	7177.25	-1159.52	-840.55	6750.17	6722.30	-1185.97	-119.68	-5.46	852.84	63.32	13.61	PASS	
8725.00†	7176.96	-1161.91	-940.52	6730.21	6705.26	-1186.74	-130.04	-5.33	938.08	63.91	14.83	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: LEFFLER 8N-23B-L AWB Offset Wellpath: LEFFLER 8N-23B-L AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: LEFFLER 8N-23B-L AWB Offset Wellpath: LEFFLER 8N-23B-L AWP

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
13.5in Open Hole	25.00	1791.00	1766.00	28.00	1793.95	-636.29	-14.42	-636.11	-14.19

WELLPATH COMPOSITION - Offset Wellbore: LEFFLER 8N-23B-L AWB Offset Wellpath: LEFFLER 8N-23B-L AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
25.00	1731.00	Custom BHI NaviTrak (Standard Rotating+Axial Corr) (Rockies 0.03Gt model)	BHI NAVITRAK W/EM 13.5 (STD ROTATING, AXIAL, ROCKIES GT)<112-1731>	LEFFLER 8N-23B-L AWB
1731.00	17509.00	Custom BHI AutoTrak Curve (IFR1) (Rockies 0.03Gt model)	BHI ATC 8.5" (IFR, SHORT, ROCKIES GT)<1839-17509>	LEFFLER 8N-23B-L AWB
17509.00	17533.00	Blind Drilling (std)	Projection to bit	LEFFLER 8N-23B-L AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: LEFFLER 8N-23B-L AWB Offset Wellpath: LEFFLER 8N-23B-L AWP

MD Reference: PRECISION 562 (25') (RKB)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	25.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 94 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DONN 4N-20C-L PWB Offset Wellpath: DONN 4N-20C-L PWP (REV-B.0)

Facility: SEC.21-T06N-R66W Slot: SLOTS#16 DONN 4N-20C-L (798'FNL & 251'FEL, SEC.21) Well: DONN 4N-20C-L Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00†	25.00	0.00	0.00	26.00	25.00	139.90	1.11	0.46	139.90	1.57	230.93	PASS	
125.00†	125.00	0.00	0.00	126.00	125.00	139.90	1.11	0.46	139.90	1.89	150.41	PASS	
225.00†	225.00	0.00	0.00	226.00	225.00	139.90	1.11	0.46	139.90	2.46	93.08	PASS	
300.00†	300.00	0.00	0.00	300.99	299.99	139.90	1.11	0.46	139.90	2.90	71.66	PASS	
325.00†	325.00	-0.09	0.06	325.78	324.78	139.92	1.23	-143.32	140.01	3.05	66.64	PASS	
425.00†	424.96	-2.20	1.61	424.86	423.82	140.35	3.79	-142.88	142.58	3.85	49.01	PASS	
525.00†	524.77	-7.13	5.22	523.70	522.47	141.36	9.72	-141.93	148.58	4.97	36.88	PASS	
625.00†	624.30	-14.86	10.88	622.09	620.41	142.93	18.94	-140.59	158.05	5.94	31.55	PASS	
725.00†	723.44	-25.39	18.59	720.71	718.28	144.97	30.90	-139.18	170.88	6.85	28.85	PASS	
825.00†	822.07	-38.71	28.34	819.48	816.27	147.05	43.13	-138.54	186.44	7.75	27.32	PASS	
895.18	890.91	-49.71	36.39	888.54	884.78	148.51	51.69	-138.52	198.90	8.36	26.77	PASS	
925.00†	920.09	-54.67	40.02	917.83	913.84	149.13	55.32	-138.65	204.47	8.58	26.71	PASS	
1025.00†	1017.94	-71.32	52.20	1016.07	1011.30	151.20	67.48	-139.02	223.14	9.30	26.65	PASS	
1125.00†	1115.79	-87.96	64.39	1114.30	1108.75	153.27	79.65	-139.34	241.82	10.04	26.52	PASS	
1225.00†	1213.64	-104.60	76.57	1212.53	1206.21	155.34	91.82	-139.60	260.50	10.81	26.36	PASS	
1325.00†	1311.48	-121.25	88.76	1310.76	1303.66	157.42	103.98	-139.84	279.19	11.60	26.17	PASS	
1425.00†	1409.33	-137.89	100.94	1409.00	1401.11	159.49	116.15	-140.04	297.88	12.37	26.03	PASS	
1525.00†	1507.18	-154.53	113.12	1507.23	1498.57	161.56	128.31	-140.23	316.58	13.16	25.87	PASS	
1625.00†	1605.03	-171.18	125.31	1605.46	1596.02	163.63	140.48	-140.39	335.27	13.97	25.70	PASS	
1725.00†	1702.88	-187.82	137.49	1703.69	1693.47	165.70	152.65	-140.53	353.97	14.78	25.55	PASS	
1825.00†	1800.73	-204.47	149.67	1801.92	1790.93	167.77	164.81	-140.66	372.68	15.03	25.97	PASS	
1925.00†	1898.58	-221.11	161.86	1900.16	1888.38	169.85	176.98	-140.77	391.38	15.22	26.92	PASS	
2025.00†	1996.43	-237.75	174.04	1998.39	1985.84	171.92	189.15	-140.88	410.09	15.43	27.81	PASS	
2125.00†	2094.28	-254.40	186.22	2096.62	2083.29	173.99	201.31	-140.98	428.79	15.72	28.52	PASS	
2225.00†	2192.13	-271.04	198.41	2194.85	2180.74	176.06	213.48	-141.07	447.50	16.08	29.06	PASS	
2325.00†	2289.98	-287.68	210.59	2293.09	2278.20	178.13	225.65	-141.15	466.21	16.51	29.45	PASS	
2425.00†	2387.83	-304.33	222.77	2391.32	2375.65	180.21	237.81	-141.22	484.92	17.01	29.70	PASS	
2525.00†	2485.68	-320.97	234.96	2489.55	2473.11	182.28	249.98	-141.29	503.63	17.57	29.83	PASS	
2625.00†	2583.53	-337.62	247.14	2587.78	2570.56	184.35	262.15	-141.36	522.34	18.17	29.87	PASS	
2725.00†	2681.38	-354.26	259.33	2686.01	2668.01	186.42	274.31	-141.42	541.05	18.83	29.82	PASS	
2825.00†	2779.23	-370.90	271.51	2784.25	2765.47	188.49	286.48	-141.47	559.77	19.52	29.71	PASS	
2925.00†	2877.08	-387.55	283.69	2882.48	2862.92	190.57	298.65	-141.53	578.48	20.26	29.55	PASS	
3025.00†	2974.93	-404.19	295.88	2980.71	2960.38	192.64	310.81	-141.58	597.19	21.03	29.36	PASS	
3125.00†	3072.78	-420.83	308.06	3078.94	3057.83	194.71	322.98	-141.62	615.91	21.83	29.13	PASS	
3225.00†	3170.63	-437.48	320.24	3177.18	3155.28	196.78	335.15	-141.67	634.62	22.65	28.89	PASS	
3325.00†	3268.48	-454.12	332.43	3275.41	3252.74	198.85	347.31	-141.71	653.33	23.50	28.63	PASS	
3425.00†	3366.33	-470.77	344.61	3373.64	3350.19	200.92	359.48	-141.75	672.05	24.37	28.37	PASS	
3525.00†	3464.18	-487.41	356.79	3471.87	3447.64	203.00	371.64	-141.78	690.76	25.26	28.10	PASS	
3625.00†	3562.03	-504.05	368.98	3570.10	3545.10	205.07	383.81	-141.82	709.48	26.17	27.84	PASS	
3725.00†	3659.88	-520.70	381.16	3668.34	3642.55	207.14	395.98	-141.85	728.19	27.09	27.57	PASS	
3825.00†	3757.73	-537.34	393.34	3766.57	3740.01	209.21	408.14	-141.88	746.91	28.03	27.31	PASS	
3925.00†	3855.57	-553.98	405.53	3864.80	3837.46	211.28	420.31	-141.91	765.63	28.98	27.06	PASS	
4025.00†	3953.42	-570.63	417.71	3963.03	3934.91	213.36	432.48	-141.94	784.34	29.94	26.81	PASS	
4125.00†	4051.27	-587.27	429.90	4061.27	4032.37	215.43	444.64	-141.97	803.06	30.91	26.56	PASS	
4225.00†	4149.12	-603.92	442.08	4159.50	4129.82	217.50	456.81	-141.99	821.77	31.89	26.33	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 95 of 202

**BAKER
HUGHES**
a GE company



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DONN 4N-20C-L PWB Offset Wellpath: DONN 4N-20C-L PWP (REV-B.0)

Facility: SEC.21-T06N-R66W Slot: SLOT#16 DONN 4N-20C-L (798'FNL & 251'FEL, SEC.21) Well: DONN 4N-20C-L Threshold Value=1.00 † = Interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
4325.00†	4246.97	-620.56	454.26	4257.73	4227.28	219.57	468.98	-142.02	840.49	32.88	26.10	PASS	
4425.00†	4344.82	-637.20	466.45	4355.96	4324.73	221.64	481.14	-142.04	859.21	33.88	25.88	PASS	
4525.00†	4442.67	-653.85	478.63	4454.19	4422.18	223.71	493.31	-142.06	877.92	34.88	25.67	PASS	
4625.00†	4540.52	-670.49	490.81	4552.43	4519.64	225.79	505.48	-142.09	896.64	35.89	25.46	PASS	
4725.00†	4638.37	-687.13	503.00	4650.66	4617.09	227.86	517.64	-142.11	915.36	36.91	25.27	PASS	
4825.00†	4736.22	-703.78	515.18	4748.89	4714.54	229.93	529.81	-142.13	934.07	37.93	25.08	PASS	
4925.00†	4834.07	-720.42	527.36	4847.12	4812.00	232.00	541.98	-142.15	952.79	38.96	24.89	PASS	
5025.00†	4931.92	-737.07	539.55	4945.36	4909.45	234.07	554.14	-142.16	971.51	39.99	24.72	PASS	
5125.00†	5029.77	-753.71	551.73	5043.59	5006.91	236.15	566.31	-142.18	990.23	41.02	24.54	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: DONN 4N-20C-L PWB Offset Wellpath: DONN 4N-20C-L PWP (REV-B.0)

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: DONN 4N-20C-L PWB Offset Wellpath: DONN 4N-20C-L PWP (REV-B.0)

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
13.5in Open Hole	25.00	1750.00	1725.00	24.00	1739.42	85.28	0.68	93.44	48.61
9.625in Casing Surface	25.00	1750.00	1725.00	24.00	1739.42	85.28	0.68	93.44	48.61
8.5in Open Hole	1750.00	17836.95	16086.95	1739.42	7029.00	93.44	48.61	48.28	-3108.57

SURVEY PROGRAM - Offset Wellbore: DONN 4N-20C-L PWB Offset Wellpath: DONN 4N-20C-L PWP (REV-B.0)

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
25.00	1750.00	Custom BHI NaviTrak (Standard Rotating+Axial Corr) (Rockies 0.03Gt model)		DONN 4N-20C-L PWB
1750.00	17837.42	Custom BHI AutoTrak Curve (IFR1, Short) (Rockies 0.03Gt model)		DONN 4N-20C-L PWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: DONN 4N-20C-L PWB Offset Wellpath: DONN 4N-20C-L PWP (REV-B.0)

MD Reference: PRECISION DRILLING (25') (RKB)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	25.00ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 96 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. LINDBLAD 20-25X AWP Offset Wellpath: EX. LINDBLAD 20-25X AWP

Facility: SEC.20-T06N-R66W Slot: SLOT#08 EX. LINDBLAD 20-25X (1304'FNL & 1398'FWL, PR, NB/CD) Well: EX. LINDBLAD 20-25X Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	20.00	25.00	-522.26	-8952.60	-93.34	8967.82	25.57	364.48	PASS	
125.00†	125.00	0.00	0.00	120.00	125.00	-522.26	-8952.60	-93.34	8967.82	25.57	364.44	PASS	
225.00†	225.00	0.00	0.00	220.00	225.00	-522.26	-8952.60	-93.34	8967.82	25.57	364.34	PASS	
300.00	300.00	0.00	0.00	295.00	300.00	-522.26	-8952.60	-93.34	8967.82	25.58	364.22	PASS	
325.00†	325.00	-0.09	0.06	320.00	325.00	-522.26	-8952.60	122.87	8967.88	25.59	364.18	PASS	
425.00†	424.96	-2.20	1.61	419.96	424.96	-522.26	-8952.60	122.86	8969.30	25.61	363.95	PASS	
525.00†	524.77	-7.13	5.22	519.77	524.77	-522.26	-8952.60	122.83	8972.61	25.64	363.52	PASS	
625.00†	624.30	-14.86	10.88	619.30	624.30	-522.26	-8952.60	122.80	8977.83	25.69	363.11	PASS	
725.00†	723.44	-25.39	18.59	718.44	723.44	-522.26	-8952.60	122.75	8984.93	25.73	362.69	PASS	
825.00†	822.07	-38.71	28.34	817.07	822.07	-522.26	-8952.60	122.68	8993.94	25.79	362.27	PASS	
895.18	890.91	-49.71	36.39	885.91	890.91	-522.26	-8952.60	122.63	9001.40	25.83	362.01	PASS	
925.00†	920.09	-54.67	40.02	915.09	920.09	-522.26	-8952.60	122.66	9004.77	25.84	361.94	PASS	
1025.00†	1017.94	-71.32	52.20	1012.94	1017.94	-522.26	-8952.60	122.77	9016.09	25.89	361.71	PASS	
1125.00†	1115.79	-87.96	64.39	1110.79	1115.79	-522.26	-8952.60	122.88	9027.44	25.94	361.38	PASS	
1225.00†	1213.64	-104.60	76.57	1208.64	1213.64	-522.26	-8952.60	122.99	9038.83	26.00	360.97	PASS	
1325.00†	1311.48	-121.25	88.76	1306.48	1311.48	-522.26	-8952.60	123.09	9050.24	26.07	360.49	PASS	
1425.00†	1409.33	-137.89	100.94	1404.33	1409.33	-522.26	-8952.60	123.20	9061.69	26.14	359.92	PASS	
1525.00†	1507.18	-154.53	113.12	1502.18	1507.18	-522.26	-8952.60	123.31	9073.18	26.21	359.28	PASS	
1625.00†	1605.03	-171.18	125.31	1600.03	1605.03	-522.26	-8952.60	123.42	9084.69	26.30	358.56	PASS	
1725.00†	1702.88	-187.82	137.49	1697.88	1702.88	-522.26	-8952.60	123.52	9096.24	26.39	357.77	PASS	
1825.00†	1800.73	-204.47	149.67	1795.73	1800.73	-522.26	-8952.60	123.63	9107.82	26.19	357.40	PASS	
1925.00†	1898.58	-221.11	161.86	1893.58	1898.58	-522.26	-8952.60	123.74	9119.43	26.22	357.39	PASS	
2025.00†	1996.43	-237.75	174.04	1991.43	1996.43	-522.26	-8952.60	123.84	9131.07	26.27	357.20	PASS	
2125.00†	2094.28	-254.40	186.22	2089.28	2094.28	-522.26	-8952.60	123.95	9142.75	26.33	356.82	PASS	
2225.00†	2192.13	-271.04	198.41	2187.13	2192.13	-522.26	-8952.60	124.05	9154.45	26.40	356.26	PASS	
2325.00†	2289.98	-287.68	210.59	2284.98	2289.98	-522.26	-8952.60	124.16	9166.19	26.49	355.53	PASS	
2425.00†	2387.83	-304.33	222.77	2382.83	2387.83	-522.26	-8952.60	124.26	9177.96	26.59	354.62	PASS	
2525.00†	2485.68	-320.97	234.96	2480.68	2485.68	-522.26	-8952.60	124.37	9189.76	26.70	353.55	PASS	
2625.00†	2583.53	-337.62	247.14	2578.53	2583.53	-522.26	-8952.60	124.47	9201.59	26.82	352.32	PASS	
2725.00†	2681.38	-354.26	259.33	2676.38	2681.38	-522.26	-8952.60	124.58	9213.46	26.96	350.93	PASS	
2825.00†	2779.23	-370.90	271.51	2774.23	2779.23	-522.26	-8952.60	124.68	9225.35	27.11	349.40	PASS	
2925.00†	2877.08	-387.55	283.69	2872.08	2877.08	-522.26	-8952.60	124.78	9237.27	27.27	347.73	PASS	
3025.00†	2974.93	-404.19	295.88	2969.93	2974.93	-522.26	-8952.60	124.89	9249.23	27.44	345.93	PASS	
3125.00†	3072.78	-420.83	308.06	3067.78	3072.78	-522.26	-8952.60	124.99	9261.21	27.63	344.00	PASS	
3225.00†	3170.63	-437.48	320.24	3165.63	3170.63	-522.26	-8952.60	125.09	9273.23	27.82	341.96	PASS	
3325.00†	3268.48	-454.12	332.43	3263.48	3268.48	-522.26	-8952.60	125.20	9285.28	28.03	339.82	PASS	
3425.00†	3366.33	-470.77	344.61	3361.33	3366.33	-522.26	-8952.60	125.30	9297.35	28.25	337.57	PASS	
3525.00†	3464.18	-487.41	356.79	3459.18	3464.18	-522.26	-8952.60	125.40	9309.46	28.48	335.23	PASS	
3625.00†	3562.03	-504.05	368.98	3557.03	3562.03	-522.26	-8952.60	125.50	9321.59	28.71	332.81	PASS	
3725.00†	3659.88	-520.70	381.16	3654.88	3659.88	-522.26	-8952.60	125.60	9333.76	28.96	330.32	PASS	
3825.00†	3757.73	-537.34	393.34	3752.73	3757.73	-522.26	-8952.60	125.71	9345.96	29.22	327.75	PASS	
3925.00†	3855.57	-553.98	405.53	3850.57	3855.57	-522.26	-8952.60	125.81	9358.18	29.49	325.13	PASS	
4025.00†	3953.42	-570.63	417.71	3948.42	3953.42	-522.26	-8952.60	125.91	9370.44	29.77	322.45	PASS	
4125.00†	4051.27	-587.27	429.90	4046.27	4051.27	-522.26	-8952.60	126.01	9382.72	30.05	319.73	PASS	
4225.00†	4149.12	-603.92	442.08	4144.12	4149.12	-522.26	-8952.60	126.11	9395.03	30.35	316.97	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 97 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. LINDBLAD 20-25X AWP Offset Wellpath: EX. LINDBLAD 20-25X AWP

Facility: SEC.20-T06N-R66W Slot: SLOT#08 EX. LINDBLAD 20-25X (1304'FNL & 1398'FWL, PR, NB/CD) Well: EX. LINDBLAD 20-25X Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
4325.00†	4246.97	-620.56	454.26	4241.97	4246.97	-522.26	-8952.60	126.21	9407.37	30.65	314.17	PASS	
4425.00†	4344.82	-637.20	466.45	4339.82	4344.82	-522.26	-8952.60	126.31	9419.75	30.96	311.35	PASS	
4525.00†	4442.67	-653.85	478.63	4437.67	4442.67	-522.26	-8952.60	126.41	9432.15	31.28	308.51	PASS	
4625.00†	4540.52	-670.49	490.81	4535.52	4540.52	-522.26	-8952.60	126.51	9444.58	31.61	305.65	PASS	
4725.00†	4638.37	-687.13	503.00	4633.37	4638.37	-522.26	-8952.60	126.61	9457.03	31.94	302.78	PASS	
4825.00†	4736.22	-703.78	515.18	4731.22	4736.22	-522.26	-8952.60	126.71	9469.52	32.28	299.90	PASS	
4925.00†	4834.07	-720.42	527.36	4829.07	4834.07	-522.26	-8952.60	126.80	9482.03	57.39	167.37	PASS	
5025.00†	4931.92	-737.07	539.55	4926.92	4931.92	-522.26	-8952.60	126.90	9494.58	58.47	164.37	PASS	
5125.00†	5029.77	-753.71	551.73	5024.77	5029.77	-522.26	-8952.60	127.00	9507.15	60.25	159.65	PASS	
5225.00†	5127.62	-770.35	563.91	5122.62	5127.62	-522.26	-8952.60	127.10	9519.75	62.65	153.68	PASS	
5325.00†	5225.47	-787.00	576.10	5220.47	5225.47	-522.26	-8952.60	127.20	9532.37	65.54	147.02	PASS	
5425.00†	5323.32	-803.64	588.28	5318.32	5323.32	-522.26	-8952.60	127.29	9545.03	68.82	140.12	PASS	
5525.00†	5421.17	-820.28	600.47	5416.17	5421.17	-522.26	-8952.60	127.39	9557.71	72.40	133.31	PASS	
5625.00†	5519.02	-836.93	612.65	5514.02	5519.02	-522.26	-8952.60	127.49	9570.42	76.21	126.75	PASS	
5725.00†	5616.87	-853.57	624.83	5611.87	5616.87	-522.26	-8952.60	127.58	9583.16	80.20	120.55	PASS	
5825.00†	5714.72	-870.22	637.02	5709.72	5714.72	-522.26	-8952.60	127.68	9595.93	84.32	114.76	PASS	
5925.00†	5812.57	-886.86	649.20	5807.57	5812.57	-522.26	-8952.60	127.78	9608.72	88.56	109.37	PASS	
6025.00†	5910.42	-903.50	661.38	5905.42	5910.42	-522.26	-8952.60	127.87	9621.54	92.88	104.37	PASS	
6125.00†	6008.27	-920.15	673.57	6003.27	6008.27	-522.26	-8952.60	127.97	9634.38	97.28	99.75	PASS	
6225.00†	6106.12	-936.79	685.75	6101.12	6106.12	-522.26	-8952.60	128.06	9647.26	101.74	95.48	PASS	
6325.00†	6203.97	-953.43	697.93	6198.97	6203.97	-522.26	-8952.60	128.16	9660.16	106.24	91.53	PASS	
6425.00†	6301.82	-970.08	710.12	6296.82	6301.82	-522.26	-8952.60	128.25	9673.09	110.79	87.87	PASS	
6525.00†	6399.66	-986.72	722.30	6394.66	6399.66	-522.26	-8952.60	128.35	9686.04	115.37	84.47	PASS	
6605.93	6478.85	-1000.19	732.16	6473.85	6478.85	-522.26	-8952.60	128.42	9696.55	119.10	81.89	PASS	
6625.00†	6497.54	-1003.38	734.20	6492.54	6497.54	-522.26	-8952.60	121.14	9698.74	119.98	81.31	PASS	
6725.00†	6595.97	-1020.39	735.57	6590.97	6595.97	-522.26	-8952.60	72.56	9700.96	124.79	78.18	PASS	
6825.00†	6693.34	-1037.59	721.30	6688.34	6693.34	-522.26	-8952.60	42.15	9687.61	130.06	74.89	PASS	
6925.00†	6787.24	-1054.57	691.74	6782.24	6787.24	-522.26	-8952.60	29.66	9659.01	135.24	71.79	PASS	
7025.00†	6875.37	-1070.91	647.62	6870.37	6875.37	-522.26	-8952.60	23.92	9615.88	139.92	69.07	PASS	
7125.00†	6955.55	-1086.20	590.03	6950.55	6955.55	-522.26	-8952.60	21.15	9559.28	144.06	66.68	PASS	
7225.00†	7025.81	-1100.06	520.38	7020.81	7025.81	-522.26	-8952.60	20.12	9490.59	147.61	64.60	PASS	
7325.00†	7084.42	-1112.16	440.40	7079.42	7084.42	-522.26	-8952.60	20.55	9411.50	150.51	62.82	PASS	
7425.00†	7129.94	-1122.20	352.04	7124.94	7129.94	-522.26	-8952.60	22.86	9323.96	152.72	61.33	PASS	
7525.00†	7161.25	-1129.93	257.49	7156.25	7161.25	-522.26	-8952.60	29.22	9230.12	154.21	60.13	PASS	
7625.00†	7177.57	-1135.16	159.08	7172.57	7177.57	-522.26	-8952.60	51.01	9132.27	154.98	59.19	PASS	
7682.94	7180.00	-1136.99	101.24	7175.00	7180.00	-522.26	-8952.60	91.82	9074.68	155.11	58.77	PASS	
7725.00†	7179.88	-1138.00	59.19	7174.88	7179.88	-522.26	-8952.60	91.81	9032.80	155.11	58.50	PASS	
7825.00†	7179.59	-1140.39	-40.78	7174.59	7179.59	-522.26	-8952.60	91.79	8933.23	155.13	57.84	PASS	
7925.00†	7179.29	-1142.78	-140.75	7174.29	7179.29	-522.26	-8952.60	91.77	8833.67	155.16	57.19	PASS	
8025.00†	7179.00	-1145.17	-240.72	7174.00	7179.00	-522.26	-8952.60	91.75	8734.12	155.19	56.53	PASS	
8125.00†	7178.71	-1147.56	-340.69	7173.71	7178.71	-522.26	-8952.60	91.73	8634.58	155.23	55.87	PASS	
8225.00†	7178.42	-1149.95	-440.66	7173.42	7178.42	-522.26	-8952.60	91.71	8535.05	155.28	55.21	PASS	
8325.00†	7178.13	-1152.34	-540.63	7173.13	7178.13	-522.26	-8952.60	91.69	8435.53	155.33	54.55	PASS	
8425.00†	7177.84	-1154.73	-640.61	7172.84	7177.84	-522.26	-8952.60	91.67	8336.02	155.40	53.88	PASS	
8525.00†	7177.55	-1157.12	-740.58	7172.55	7177.55	-522.26	-8952.60	91.65	8236.53	155.47	53.22	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 98 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. LINDBLAD 20-25X AWP Offset Wellpath: EX. LINDBLAD 20-25X AWP

Facility: SEC.20-T06N-R66W Slot: SLOT#08 EX. LINDBLAD 20-25X (1304'FNL & 1398'FWL, PR, NB/CD) Well: EX. LINDBLAD 20-25X Threshold Value=1.00 † = Interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
8625.00†	7177.25	-1159.52	-840.55	7172.25	7177.25	-522.26	-8952.60	91.63	8137.04	155.55	52.55	PASS	
8725.00†	7176.96	-1161.91	-940.52	7171.96	7176.96	-522.26	-8952.60	91.61	8037.57	155.65	51.87	PASS	
8825.00†	7176.67	-1164.30	-1040.49	7171.67	7176.67	-522.26	-8952.60	91.59	7938.12	155.75	51.20	PASS	
8925.00†	7176.38	-1166.69	-1140.46	7171.38	7176.38	-522.26	-8952.60	91.57	7838.67	155.86	50.52	PASS	
9025.00†	7176.09	-1169.08	-1240.43	7171.09	7176.09	-522.26	-8952.60	91.55	7739.24	155.99	49.84	PASS	
9125.00†	7175.80	-1171.47	-1340.40	7170.80	7175.80	-522.26	-8952.60	91.53	7639.83	156.13	49.15	PASS	
9225.00†	7175.51	-1173.86	-1440.37	7170.51	7175.51	-522.26	-8952.60	91.51	7540.43	156.28	48.46	PASS	
9325.00†	7175.21	-1176.25	-1540.34	7170.21	7175.21	-522.26	-8952.60	91.49	7441.05	156.45	47.77	PASS	
9425.00†	7174.92	-1178.64	-1640.32	7169.92	7174.92	-522.26	-8952.60	91.47	7341.68	156.63	47.08	PASS	
9525.00†	7174.63	-1181.03	-1740.29	7169.63	7174.63	-522.26	-8952.60	91.45	7242.34	156.82	46.39	PASS	
9625.00†	7174.34	-1183.42	-1840.26	7169.34	7174.34	-522.26	-8952.60	91.43	7143.01	157.03	45.69	PASS	
9725.00†	7174.05	-1185.82	-1940.23	7169.05	7174.05	-522.26	-8952.60	91.41	7043.69	157.26	44.99	PASS	
9825.00†	7173.76	-1188.21	-2040.20	7168.76	7173.76	-522.26	-8952.60	91.39	6944.40	157.51	44.28	PASS	
9925.00†	7173.47	-1190.60	-2140.17	7168.47	7173.47	-522.26	-8952.60	91.37	6845.13	157.77	43.58	PASS	
10025.00†	7173.17	-1192.99	-2240.14	7168.17	7173.17	-522.26	-8952.60	91.35	6745.88	158.05	42.87	PASS	
10125.00†	7172.88	-1195.38	-2340.11	7167.88	7172.88	-522.26	-8952.60	91.33	6646.66	158.36	42.16	PASS	
10225.00†	7172.59	-1197.77	-2440.08	7167.59	7172.59	-522.26	-8952.60	91.31	6547.45	158.69	41.44	PASS	
10325.00†	7172.30	-1200.16	-2540.05	7167.30	7172.30	-522.26	-8952.60	91.29	6448.28	159.04	40.72	PASS	
10425.00†	7172.01	-1202.55	-2640.03	7167.01	7172.01	-522.26	-8952.60	91.27	6349.12	159.42	40.00	PASS	
10525.00†	7171.72	-1204.94	-2740.00	7166.72	7171.72	-522.26	-8952.60	91.25	6250.00	159.82	39.28	PASS	
10625.00†	7171.42	-1207.33	-2839.97	7166.42	7171.42	-522.26	-8952.60	91.23	6150.90	160.25	38.55	PASS	
10725.00†	7171.13	-1209.72	-2939.94	7166.13	7171.13	-522.26	-8952.60	91.20	6051.83	160.71	37.82	PASS	
10825.00†	7170.84	-1212.11	-3039.91	7165.84	7170.84	-522.26	-8952.60	91.18	5952.80	161.20	37.09	PASS	
10925.00†	7170.55	-1214.51	-3139.88	7165.55	7170.55	-522.26	-8952.60	91.16	5853.79	161.73	36.35	PASS	
11025.00†	7170.26	-1216.90	-3239.85	7165.26	7170.26	-522.26	-8952.60	91.14	5754.82	162.28	35.61	PASS	
11125.00†	7169.97	-1219.29	-3339.82	7164.97	7169.97	-522.26	-8952.60	91.12	5655.89	162.88	34.87	PASS	
11225.00†	7169.68	-1221.68	-3439.79	7164.68	7169.68	-522.26	-8952.60	91.10	5557.00	163.51	34.13	PASS	
11325.00†	7169.38	-1224.07	-3539.76	7164.38	7169.38	-522.26	-8952.60	91.08	5458.14	164.19	33.38	PASS	
11425.00†	7169.09	-1226.46	-3639.74	7164.09	7169.09	-522.26	-8952.60	91.06	5359.33	164.91	32.63	PASS	
11525.00†	7168.80	-1228.85	-3739.71	7163.80	7168.80	-522.26	-8952.60	91.04	5260.56	165.68	31.88	PASS	
11625.00†	7168.51	-1231.24	-3839.68	7163.51	7168.51	-522.26	-8952.60	91.02	5161.84	166.50	31.13	PASS	
11725.00†	7168.22	-1233.63	-3939.65	7163.22	7168.22	-522.26	-8952.60	91.00	5063.17	167.37	30.38	PASS	
11825.00†	7167.93	-1236.02	-4039.62	7162.93	7167.93	-522.26	-8952.60	90.98	4964.56	168.29	29.62	PASS	
11925.00†	7167.64	-1238.41	-4139.59	7162.64	7167.64	-522.26	-8952.60	90.96	4866.00	169.27	28.86	PASS	
12025.00†	7167.34	-1240.81	-4239.56	7162.34	7167.34	-522.26	-8952.60	90.94	4767.50	170.32	28.10	PASS	
12125.00†	7167.05	-1243.20	-4339.53	7162.05	7167.05	-522.26	-8952.60	90.92	4669.06	171.44	27.34	PASS	
12225.00†	7166.76	-1245.59	-4439.50	7161.76	7166.76	-522.26	-8952.60	90.90	4570.69	172.62	26.58	PASS	
12325.00†	7166.47	-1247.98	-4539.47	7161.47	7166.47	-522.26	-8952.60	90.88	4472.40	173.89	25.82	PASS	
12425.00†	7166.18	-1250.37	-4639.45	7161.18	7166.18	-522.26	-8952.60	90.86	4374.18	175.23	25.06	PASS	
12525.00†	7165.89	-1252.76	-4739.42	7160.89	7165.89	-522.26	-8952.60	90.84	4276.04	176.67	24.30	PASS	
12625.00†	7165.60	-1255.15	-4839.39	7160.60	7165.60	-522.26	-8952.60	90.82	4177.99	178.19	23.54	PASS	
12725.00†	7165.30	-1257.54	-4939.36	7160.30	7165.30	-522.26	-8952.60	90.80	4080.04	179.82	22.78	PASS	
12825.00†	7165.01	-1259.93	-5039.33	7160.01	7165.01	-522.26	-8952.60	90.78	3982.19	181.55	22.02	PASS	
12925.00†	7164.72	-1262.32	-5139.30	7159.72	7164.72	-522.26	-8952.60	90.76	3884.45	183.39	21.26	PASS	
13025.00†	7164.43	-1264.71	-5239.27	7159.43	7164.43	-522.26	-8952.60	90.74	3786.82	185.36	20.50	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 99 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. LINDBLAD 20-25X AWP Offset Wellpath: EX. LINDBLAD 20-25X AWP

Facility: SEC.20-T06N-R66W Slot: SLOT#08 EX. LINDBLAD 20-25X (1304'FNL & 1398'FWL, PR, NB/CD) Well: EX. LINDBLAD 20-25X Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
13125.00†	7164.14	-1267.10	-5339.24	7159.14	7164.14	-522.26	-8952.60	90.72	3689.33	187.47	19.75	PASS	
13225.00†	7163.85	-1269.50	-5439.21	7158.85	7163.85	-522.26	-8952.60	90.70	3591.97	189.71	19.00	PASS	
13325.00†	7163.56	-1271.89	-5539.18	7158.56	7163.56	-522.26	-8952.60	90.68	3494.76	192.11	18.26	PASS	
13425.00†	7163.26	-1274.28	-5639.16	7158.26	7163.26	-522.26	-8952.60	90.66	3397.71	194.68	17.51	PASS	
13525.00†	7162.97	-1276.67	-5739.13	7157.97	7162.97	-522.26	-8952.60	90.64	3300.84	197.42	16.78	PASS	
13625.00†	7162.68	-1279.06	-5839.10	7157.68	7162.68	-522.26	-8952.60	90.62	3204.16	200.36	16.04	PASS	
13725.00†	7162.39	-1281.45	-5939.07	7157.39	7162.39	-522.26	-8952.60	90.60	3107.69	203.52	15.32	PASS	
13825.00†	7162.10	-1283.84	-6039.04	7157.10	7162.10	-522.26	-8952.60	90.58	3011.45	206.90	14.60	PASS	
13925.00†	7161.81	-1286.23	-6139.01	7156.81	7161.81	-522.26	-8952.60	90.56	2915.46	210.54	13.89	PASS	
14025.00†	7161.51	-1288.62	-6238.98	7156.51	7161.51	-522.26	-8952.60	90.54	2819.76	214.45	13.19	PASS	
14032.94	7161.49	-1288.81	-6246.92	7156.49	7161.49	-522.26	-8952.60	90.54	2812.17	214.77	13.13	PASS	
14125.00†	7161.22	-1288.79	-6338.97	7156.22	7161.22	-522.26	-8952.60	90.63	2723.72	218.36	12.51	PASS	
14211.94	7160.97	-1284.71	-6425.81	7155.97	7160.97	-522.26	-8952.60	90.74	2639.32	221.41	11.96	PASS	
14225.00†	7160.93	-1283.79	-6438.83	7155.93	7160.93	-522.26	-8952.60	90.73	2626.58	221.85	11.87	PASS	
14325.00†	7160.64	-1276.82	-6538.59	7155.64	7160.64	-522.26	-8952.60	90.70	2529.19	225.31	11.26	PASS	
14411.94	7160.39	-1270.75	-6625.32	7155.39	7160.39	-522.26	-8952.60	90.68	2444.68	228.56	10.73	PASS	
14425.00†	7160.35	-1269.89	-6638.35	7155.35	7160.35	-522.26	-8952.60	90.66	2432.01	229.08	10.65	PASS	
14525.00†	7160.06	-1266.21	-6738.27	7155.06	7160.06	-522.26	-8952.60	90.52	2335.96	233.69	10.02	PASS	
14625.00†	7159.76	-1267.77	-6838.25	7154.76	7159.76	-522.26	-8952.60	90.42	2241.93	239.59	9.38	PASS	
14725.00†	7159.47	-1274.55	-6938.00	7154.47	7159.47	-522.26	-8952.60	90.35	2150.47	246.89	8.73	PASS	
14825.00†	7159.17	-1286.55	-7037.27	7154.17	7159.17	-522.26	-8952.60	90.29	2062.19	255.73	8.08	PASS	
14925.00†	7158.88	-1303.73	-7135.77	7153.88	7158.88	-522.26	-8952.60	90.24	1977.76	266.20	7.45	PASS	
14937.60	7158.84	-1306.26	-7148.12	7153.84	7158.84	-522.26	-8952.60	90.24	1967.43	267.64	7.37	PASS	
15025.00†	7158.59	-1324.09	-7233.68	7153.59	7158.59	-522.26	-8952.60	90.22	1896.74	278.08	6.84	PASS	
15037.60	7158.55	-1326.66	-7246.02	7153.55	7158.55	-522.26	-8952.60	90.22	1886.66	279.64	6.76	PASS	
15125.00†	7158.30	-1342.52	-7331.95	7153.30	7158.30	-522.26	-8952.60	90.23	1816.40	290.60	6.26	PASS	
15225.00†	7158.01	-1355.83	-7431.05	7153.01	7158.01	-522.26	-8952.60	90.24	1734.92	303.27	5.73	PASS	
15325.00†	7157.72	-1363.93	-7530.71	7152.72	7157.72	-522.26	-8952.60	90.25	1652.32	316.07	5.24	PASS	
15417.62	7157.45	-1366.77	-7623.28	7152.45	7157.45	-522.26	-8952.60	90.26	1574.90	328.04	4.81	PASS	
15425.00†	7157.43	-1366.82	-7630.66	7152.43	7157.43	-522.26	-8952.60	90.26	1568.70	329.00	4.78	PASS	
15525.00†	7157.14	-1367.46	-7730.65	7152.14	7157.14	-522.26	-8952.60	90.24	1485.77	342.68	4.34	PASS	
15625.00†	7156.85	-1368.11	-7830.65	7151.85	7156.85	-522.26	-8952.60	90.22	1405.07	357.63	3.93	PASS	
15725.00†	7156.56	-1368.75	-7930.65	7151.56	7156.56	-522.26	-8952.60	90.20	1327.00	373.94	3.55	PASS	
15825.00†	7156.27	-1369.40	-8030.65	7151.27	7156.27	-522.26	-8952.60	90.18	1252.05	391.64	3.20	PASS	
15925.00†	7155.98	-1370.04	-8130.64	7150.98	7155.98	-522.26	-8952.60	90.16	1180.82	410.71	2.88	PASS	
16025.00†	7155.70	-1370.69	-8230.64	7150.70	7155.70	-522.26	-8952.60	90.14	1114.02	431.01	2.59	PASS	
16125.00†	7155.41	-1371.33	-8330.64	7150.41	7155.41	-522.26	-8952.60	90.12	1052.50	452.24	2.33	PASS	
16225.00†	7155.12	-1371.98	-8430.64	7150.12	7155.12	-522.26	-8952.60	90.10	997.23	473.88	2.11	PASS	
16325.00†	7154.83	-1372.62	-8530.63	7149.83	7154.83	-522.26	-8952.60	90.08	949.30	495.13	1.92	PASS	
16425.00†	7154.54	-1373.27	-8630.63	7149.54	7154.54	-522.26	-8952.60	90.06	909.88	514.90	1.77	PASS	
16525.00†	7154.25	-1373.91	-8730.63	7149.25	7154.25	-522.26	-8952.60	90.04	880.10	531.85	1.66	PASS	
16625.00†	7153.97	-1374.56	-8830.63	7148.97	7153.97	-522.26	-8952.60	90.02	860.98	544.62	1.58	PASS	
16725.00†	7153.68	-1375.20	-8930.62	7148.68	7153.68	-522.26	-8952.60	90.00	853.22	552.08	1.55	PASS	
16740.59†	7153.63	-1375.30	-8946.21	7148.98	7153.98	-522.26	-8952.60	90.02	853.06	552.73	1.54	PASS	
16767.58†	7153.55	-1375.48	-8973.20	7148.55	7153.55	-522.26	-8952.60	90.00	853.46	553.47	1.54	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 100 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. LINDBLAD 20-25X AWB Offset Wellpath: EX. LINDBLAD 20-25X AWP

Facility: SEC.20-T06N-R66W Slot: SLOT#08 EX. LINDBLAD 20-25X (1304'FNL & 1398'FWL, PR, NB/CD) Well: EX. LINDBLAD 20-25X Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
16825.00†	7153.39	-1375.85	-9030.62	7148.39	7153.39	-522.26	-8952.60	89.98	857.14	553.62	1.55	PASS	
16925.00†	7153.10	-1376.49	-9130.62	7148.10	7153.10	-522.26	-8952.60	89.96	872.58	549.34	1.59	PASS	
17025.00†	7152.81	-1377.14	-9230.62	7147.81	7152.81	-522.26	-8952.60	89.95	898.95	539.98	1.67	PASS	
17125.00†	7152.52	-1377.78	-9330.61	7147.52	7152.52	-522.26	-8952.60	89.93	935.31	526.72	1.78	PASS	
17225.00†	7152.24	-1378.43	-9430.61	7147.24	7152.24	-522.26	-8952.60	89.91	980.57	510.84	1.92	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: EX. LINDBLAD 20-25X AWB Offset Wellpath: EX. LINDBLAD 20-25X AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

WELLPATH COMPOSITION - Offset Wellbore: EX. LINDBLAD 20-25X AWB Offset Wellpath: EX. LINDBLAD 20-25X AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
0.00	7350.00	Drift Indicator - Inclination Only (Actual Survey)	ASSUMED VERTICAL TO TD FROM COGCC <7350>	EX. LINDBLAD 20-25X AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: EX. LINDBLAD 20-25X AWB Offset Wellpath: EX. LINDBLAD 20-25X AWP

MD Reference: Rig on SLOT#08 LINDBLAD 20-25X (1304'FNL & 1398'FWL, PR, NB/CD) (RT)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	4771.00ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 101 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DONN 4C-20-L PWB Offset Wellpath: DONN 4C-20-L PWP (REV-A.0)

Facility: SEC.21-T06N-R66W Slot: SLOT#15 DONN 4C-20-L (778'FNL & 251'FEL, SEC.21) Well: DONN 4C-20-L Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	26.00	25.00	159.94	1.11	0.40	159.94	1.57	264.23	PASS	
125.00†	125.00	0.00	0.00	126.00	125.00	159.94	1.11	0.40	159.94	1.89	171.95	PASS	
225.00†	225.00	0.00	0.00	225.48	224.47	159.98	1.22	0.44	159.98	2.45	106.94	PASS	
300.00	300.00	0.00	0.00	298.92	297.90	160.55	2.70	0.97	160.59	2.94	80.92	PASS	
325.00†	325.00	-0.09	0.06	323.38	322.35	160.90	3.59	-142.54	161.05	3.10	74.88	PASS	
425.00†	424.96	-2.20	1.61	421.02	419.80	163.02	9.06	-141.14	165.47	4.07	52.99	PASS	
525.00†	524.77	-7.13	5.22	518.14	516.48	166.32	17.56	-139.50	174.09	5.28	40.14	PASS	
625.00†	624.30	-14.86	10.88	615.83	613.42	170.71	28.85	-137.82	186.75	6.26	35.09	PASS	
725.00†	723.44	-25.39	18.59	714.58	711.35	175.31	40.68	-136.85	202.27	7.14	32.59	PASS	
825.00†	822.07	-38.71	28.34	812.93	808.89	179.88	52.47	-136.58	220.31	8.01	31.12	PASS	
895.18	890.91	-49.71	36.39	881.65	877.04	183.08	60.71	-136.73	234.47	8.60	30.58	PASS	
925.00†	920.09	-54.67	40.02	910.80	905.94	184.44	64.20	-136.92	240.75	8.82	30.52	PASS	
1025.00†	1017.94	-71.32	52.20	1008.52	1002.85	188.99	75.91	-137.51	261.82	9.52	30.48	PASS	
1125.00†	1115.79	-87.96	64.39	1106.24	1099.76	193.54	87.62	-138.01	282.91	10.26	30.34	PASS	
1225.00†	1213.64	-104.60	76.57	1203.96	1196.67	198.09	99.34	-138.44	304.02	11.42	28.97	PASS	
1325.00†	1311.48	-121.25	88.76	1301.69	1293.59	202.64	111.05	-138.81	325.14	11.75	30.05	PASS	
1425.00†	1409.33	-137.89	100.94	1399.41	1390.50	207.19	122.76	-139.14	346.28	12.53	29.85	PASS	
1525.00†	1507.18	-154.53	113.12	1497.13	1487.41	211.74	134.47	-139.43	367.42	13.31	29.67	PASS	
1625.00†	1605.03	-171.18	125.31	1594.86	1584.32	216.29	146.18	-139.69	388.58	14.11	29.49	PASS	
1725.00†	1702.88	-187.82	137.49	1692.58	1681.23	220.83	157.90	-139.92	409.74	14.91	29.32	PASS	
1825.00†	1800.73	-204.47	149.67	1790.30	1778.15	225.38	169.61	-140.13	430.90	15.18	29.73	PASS	
1925.00†	1898.58	-221.11	161.86	1888.02	1875.06	229.93	181.32	-140.32	452.08	15.39	30.75	PASS	
2025.00†	1996.43	-237.75	174.04	1985.75	1971.97	234.48	193.03	-140.49	473.25	15.60	31.74	PASS	
2125.00†	2094.28	-254.40	186.22	2083.47	2068.88	239.03	204.74	-140.65	494.43	15.88	32.55	PASS	
2225.00†	2192.13	-271.04	198.41	2181.19	2165.79	243.58	216.46	-140.79	515.61	16.23	33.16	PASS	
2325.00†	2289.98	-287.68	210.59	2278.92	2262.70	248.13	228.17	-140.93	536.80	16.66	33.61	PASS	
2425.00†	2387.83	-304.33	222.77	2376.64	2359.62	252.68	239.88	-141.05	557.99	17.14	33.91	PASS	
2525.00†	2485.68	-320.97	234.96	2474.36	2456.53	257.23	251.59	-141.16	579.18	17.69	34.07	PASS	
2625.00†	2583.53	-337.62	247.14	2572.08	2553.44	261.78	263.31	-141.27	600.37	18.28	34.12	PASS	
2725.00†	2681.38	-354.26	259.33	2669.81	2650.35	266.33	275.02	-141.37	621.56	18.92	34.08	PASS	
2825.00†	2779.23	-370.90	271.51	2767.53	2747.26	270.88	286.73	-141.46	642.76	19.61	33.97	PASS	
2925.00†	2877.08	-387.55	283.69	2865.25	2844.17	275.43	298.44	-141.55	663.95	20.33	33.80	PASS	
3025.00†	2974.93	-404.19	295.88	2962.98	2941.09	279.98	310.15	-141.63	685.15	21.09	33.59	PASS	
3125.00†	3072.78	-420.83	308.06	3060.70	3038.00	284.53	321.87	-141.71	706.35	21.87	33.34	PASS	
3225.00†	3170.63	-437.48	320.24	3158.42	3134.91	289.08	333.58	-141.78	727.55	22.69	33.07	PASS	
3325.00†	3268.48	-454.12	332.43	3256.14	3231.82	293.62	345.29	-141.85	748.75	23.52	32.79	PASS	
3425.00†	3366.33	-470.77	344.61	3353.87	3328.73	298.17	357.00	-141.91	769.96	24.38	32.49	PASS	
3525.00†	3464.18	-487.41	356.79	3451.59	3425.64	302.72	368.71	-141.97	791.16	25.26	32.19	PASS	
3625.00†	3562.03	-504.05	368.98	3549.31	3522.56	307.27	380.43	-142.03	812.37	26.16	31.89	PASS	
3725.00†	3659.88	-520.70	381.16	3647.04	3619.47	311.82	392.14	-142.08	833.57	27.07	31.60	PASS	
3825.00†	3757.73	-537.34	393.34	3744.76	3716.38	316.37	403.85	-142.13	854.78	27.99	31.30	PASS	
3925.00†	3855.57	-553.98	405.53	3842.48	3813.29	320.92	415.56	-142.18	875.98	28.93	31.01	PASS	
4025.00†	3953.42	-570.63	417.71	3940.20	3910.20	325.47	427.28	-142.23	897.19	29.88	30.73	PASS	
4125.00†	4051.27	-587.27	429.90	4037.93	4007.11	330.02	438.99	-142.28	918.40	30.84	30.45	PASS	
4225.00†	4149.12	-603.92	442.08	4135.65	4104.03	334.57	450.70	-142.32	939.61	31.81	30.18	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 102 of 202

**BAKER
HUGHES**
a GE company



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DONN 4C-20-L PWB Offset Wellpath: DONN 4C-20-L PWP (REV-A.0)

Facility: SEC.21-T06N-R66W Slot: SLOT#15 DONN 4C-20-L (778'FNL & 251'FEL, SEC.21) Well: DONN 4C-20-L Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
4325.00†	4246.97	-620.56	454.26	4233.37	4200.94	339.12	462.41	-142.36	960.82	32.79	29.92	PASS	
4425.00†	4344.82	-637.20	466.45	4331.10	4297.85	343.67	474.12	-142.40	982.02	33.78	29.67	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: DONN 4C-20-L PWB Offset Wellpath: DONN 4C-20-L PWP (REV-A.0)

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: DONN 4C-20-L PWB Offset Wellpath: DONN 4C-20-L PWP (REV-A.0)

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
13.5in Open Hole	25.00	1750.00	1725.00	24.00	1738.18	97.50	0.68	116.87	50.56
9.625in Casing Surface	25.00	1750.00	1725.00	24.00	1738.18	97.50	0.68	116.87	50.56
8.5in Open Hole	1750.00	17917.24	16167.24	1738.18	7135.00	116.87	50.56	115.35	-3108.29

SURVEY PROGRAM - Offset Wellbore: DONN 4C-20-L PWB Offset Wellpath: DONN 4C-20-L PWP (REV-A.0)

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
25.00	1750.00	Custom BHI NaviTrak (Standard Rotating+Axial Corr) (Rockies 0.03Gt model)		DONN 4C-20-L PWB
1750.00	17917.24	Custom BHI AutoTrak Curve (IFR1, Short) (Rockies 0.03Gt model)		DONN 4C-20-L PWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: DONN 4C-20-L PWB Offset Wellpath: DONN 4C-20-L PWP (REV-A.0)

MD Reference: PRECISION DRILLING (25') (RKB)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	25.00ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 103 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: ALICE M. HOFFNER #1-22 AWB Offset Wellpath: ALICE M. HOFFNER #1-22 AWP

Facility: SEC.22-T06N-R66W Slot: SLOT#01EX-ALICE M. HOFFNER #1-22 (1980'FNL&835'FWL-SEC.22,7300'MD,PA) Well: ALICE M. HOFFNER #1-22 Threshold Value=1.00 † = interpolated/extrapolated													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio		
25.00	25.00	0.00	0.00	-9.00	25.00	-1047.00	1080.30	134.10	1504.42	25.57	61.11	P	
125.00†	125.00	0.00	0.00	91.00	125.00	-1047.00	1080.30	134.10	1504.42	52.22	29.31	P	
225.00†	225.00	0.00	0.00	191.00	225.00	-1047.00	1080.30	134.10	1504.42	54.53	28.04	P	
300.00	300.00	0.00	0.00	266.00	300.00	-1047.00	1080.30	134.10	1504.42	56.27	27.17	P	
325.00†	325.00	-0.09	0.06	291.00	325.00	-1047.00	1080.30	-9.69	1504.31	56.85	26.88	P	
425.00†	424.96	-2.20	1.61	390.96	424.96	-1047.00	1080.30	-9.72	1501.73	59.18	25.76	P	
525.00†	524.77	-7.13	5.22	490.77	524.77	-1047.00	1080.30	-9.78	1495.71	61.60	24.65	P	
625.00†	624.30	-14.86	10.88	590.30	624.30	-1047.00	1080.30	-9.87	1486.27	63.98	23.57	P	
725.00†	723.44	-25.39	18.59	689.44	723.44	-1047.00	1080.30	-10.01	1473.41	66.35	22.52	P	
825.00†	822.07	-38.71	28.34	788.07	822.07	-1047.00	1080.30	-10.18	1457.15	68.71	21.49	P	
895.18	890.91	-49.71	36.39	856.91	890.91	-1047.00	1080.30	-10.32	1443.73	70.36	20.79	P	
925.00†	920.09	-54.67	40.02	886.09	920.09	-1047.00	1080.30	-10.37	1437.67	71.05	20.50	P	
1025.00†	1017.94	-71.32	52.20	983.94	1017.94	-1047.00	1080.30	-10.52	1417.38	73.34	19.57	P	
1125.00†	1115.79	-87.96	64.39	1081.79	1115.79	-1047.00	1080.30	-10.67	1397.09	75.65	18.69	P	
1225.00†	1213.64	-104.60	76.57	1179.64	1213.64	-1047.00	1080.30	-10.83	1376.81	77.96	17.87	P	
1325.00†	1311.48	-121.25	88.76	1277.48	1311.48	-1047.00	1080.30	-10.99	1356.54	80.27	17.09	P	
1425.00†	1409.33	-137.89	100.94	1375.33	1409.33	-1047.00	1080.30	-11.16	1336.28	82.59	16.36	P	
1525.00†	1507.18	-154.53	113.12	1473.18	1507.18	-1047.00	1080.30	-11.33	1316.03	84.92	15.66	P	
1625.00†	1605.03	-171.18	125.31	1571.03	1605.03	-1047.00	1080.30	-11.51	1295.80	87.25	15.01	P	
1725.00†	1702.88	-187.82	137.49	1668.88	1702.88	-1047.00	1080.30	-11.70	1275.57	89.59	14.38	P	
1825.00†	1800.73	-204.47	149.67	1766.73	1800.73	-1047.00	1080.30	-11.89	1255.37	91.64	13.80	P	
1925.00†	1898.58	-221.11	161.86	1864.58	1898.58	-1047.00	1080.30	-12.09	1235.17	93.91	13.25	P	
2025.00†	1996.43	-237.75	174.04	1962.43	1996.43	-1047.00	1080.30	-12.29	1214.99	96.19	12.72	P	
2125.00†	2094.28	-254.40	186.22	2060.28	2094.28	-1047.00	1080.30	-12.50	1194.82	98.48	12.21	P	
2225.00†	2192.13	-271.04	198.41	2158.13	2192.13	-1047.00	1080.30	-12.72	1174.67	100.78	11.73	P	
2325.00†	2289.98	-287.68	210.59	2255.98	2289.98	-1047.00	1080.30	-12.94	1154.54	103.10	11.27	P	
2425.00†	2387.83	-304.33	222.77	2353.83	2387.83	-1047.00	1080.30	-13.17	1134.43	105.43	10.83	P	
2525.00†	2485.68	-320.97	234.96	2451.68	2485.68	-1047.00	1080.30	-13.42	1114.33	107.77	10.40	P	
2625.00†	2583.53	-337.62	247.14	2549.53	2583.53	-1047.00	1080.30	-13.67	1094.25	110.13	9.99	P	
2725.00†	2681.38	-354.26	259.33	2647.38	2681.38	-1047.00	1080.30	-13.93	1074.20	112.49	9.60	P	
2825.00†	2779.23	-370.90	271.51	2745.23	2779.23	-1047.00	1080.30	-14.20	1054.16	114.87	9.23	P	
2925.00†	2877.08	-387.55	283.69	2843.08	2877.08	-1047.00	1080.30	-14.48	1034.15	117.26	8.87	P	
3025.00†	2974.93	-404.19	295.88	2940.93	2974.93	-1047.00	1080.30	-14.77	1014.17	119.66	8.52	P	
3125.00†	3072.78	-420.83	308.06	3038.78	3072.78	-1047.00	1080.30	-15.07	994.21	122.07	8.19	P	
3225.00†	3170.63	-437.48	320.24	3136.63	3170.63	-1047.00	1080.30	-15.38	974.28	124.49	7.87	P	
3325.00†	3268.48	-454.12	332.43	3234.48	3268.48	-1047.00	1080.30	-15.71	954.37	126.93	7.56	P	
3425.00†	3366.33	-470.77	344.61	3332.33	3366.33	-1047.00	1080.30	-16.05	934.50	129.37	7.26	P	
3525.00†	3464.18	-487.41	356.79	3430.18	3464.18	-1047.00	1080.30	-16.41	914.66	131.83	6.97	P	
3625.00†	3562.03	-504.05	368.98	3528.03	3562.03	-1047.00	1080.30	-16.78	894.86	134.29	6.69	P	
3725.00†	3659.88	-520.70	381.16	3625.88	3659.88	-1047.00	1080.30	-17.17	875.10	136.77	6.43	P	
3825.00†	3757.73	-537.34	393.34	3723.73	3757.73	-1047.00	1080.30	-17.58	855.38	139.26	6.17	P	
3925.00†	3855.57	-553.98	405.53	3821.57	3855.57	-1047.00	1080.30	-18.01	835.70	141.75	5.92	P	
4025.00†	3953.42	-570.63	417.71	3919.42	3953.42	-1047.00	1080.30	-18.45	816.06	144.26	5.68	P	
4125.00†	4051.27	-587.27	429.90	4017.27	4051.27	-1047.00	1080.30	-18.92	796.48	146.77	5.45	P	
4225.00†	4149.12	-603.92	442.08	4115.12	4149.12	-1047.00	1080.30	-19.41	776.95	149.30	5.22	P	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 104 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: ALICE M. HOFFNER #1-22 AWB Offset Wellpath: ALICE M. HOFFNER #1-22 AWP

Facility: SEC.22-T06N-R66W Slot: SLOT#01EX-ALICE M. HOFFNER #1-22 (1980'FNL&835'FWL-SEC.22,7300'MD,PA) Well: ALICE M. HOFFNER #1-22 Threshold Value=1.00 † = interpolated/extrapolated													/ S	
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio			
4325.00†	4246.97	-620.56	454.26	4212.97	4246.97	-1047.00	1080.30	-19.93	757.48	151.83	5.01	F		
4425.00†	4344.82	-637.20	466.45	4310.82	4344.82	-1047.00	1080.30	-20.47	738.08	154.38	4.80	F		
4525.00†	4442.67	-653.85	478.63	4408.67	4442.67	-1047.00	1080.30	-21.05	718.74	156.93	4.60	F		
4625.00†	4540.52	-670.49	490.81	4506.52	4540.52	-1047.00	1080.30	-21.65	699.47	159.49	4.40	F		
4725.00†	4638.37	-687.13	503.00	4604.37	4638.37	-1047.00	1080.30	-22.29	680.29	162.06	4.21	F		
4825.00†	4736.22	-703.78	515.18	4702.22	4736.22	-1047.00	1080.30	-22.97	661.19	164.64	4.03	F		
4925.00†	4834.07	-720.42	527.36	4800.07	4834.07	-1047.00	1080.30	-23.68	642.18	167.23	3.85	F		
5025.00†	4931.92	-737.07	539.55	4897.92	4931.92	-1047.00	1080.30	-24.44	623.28	169.83	3.68	F		
5125.00†	5029.77	-753.71	551.73	4995.77	5029.77	-1047.00	1080.30	-25.25	604.49	172.43	3.52	F		
5225.00†	5127.62	-770.35	563.91	5093.62	5127.62	-1047.00	1080.30	-26.10	585.83	175.05	3.36	F		
5325.00†	5225.47	-787.00	576.10	5191.47	5225.47	-1047.00	1080.30	-27.02	567.30	177.67	3.20	F		
5425.00†	5323.32	-803.64	588.28	5289.32	5323.32	-1047.00	1080.30	-27.99	548.92	180.31	3.05	F		
5525.00†	5421.17	-820.28	600.47	5387.17	5421.17	-1047.00	1080.30	-29.03	530.70	182.95	2.91	F		
5625.00†	5519.02	-836.93	612.65	5485.02	5519.02	-1047.00	1080.30	-30.14	512.67	185.60	2.77	F		
5725.00†	5616.87	-853.57	624.83	5582.87	5616.87	-1047.00	1080.30	-31.34	494.84	188.26	2.63	F		
5825.00†	5714.72	-870.22	637.02	5680.72	5714.72	-1047.00	1080.30	-32.62	477.24	190.93	2.51	F		
5925.00†	5812.57	-886.86	649.20	5778.57	5812.57	-1047.00	1080.30	-33.99	459.89	193.61	2.38	F		
6025.00†	5910.42	-903.50	661.38	5876.42	5910.42	-1047.00	1080.30	-35.47	442.82	196.30	2.26	F		
6125.00†	6008.27	-920.15	673.57	5974.27	6008.27	-1047.00	1080.30	-37.07	426.06	199.00	2.15	F		
6225.00†	6106.12	-936.79	685.75	6072.12	6106.12	-1047.00	1080.30	-38.80	409.66	201.72	2.03	F		
6325.00†	6203.97	-953.43	697.93	6169.97	6203.97	-1047.00	1080.30	-40.66	393.65	204.44	1.93	F		
6425.00†	6301.82	-970.08	710.12	6267.82	6301.82	-1047.00	1080.30	-42.68	378.09	207.18	1.83	F		
6525.00†	6399.66	-986.72	722.30	6365.66	6399.66	-1047.00	1080.30	-44.86	363.04	209.93	1.73	F		
6605.93	6478.85	-1000.19	732.16	6444.85	6478.85	-1047.00	1080.30	-46.76	351.28	212.17	1.66	F		
6625.00†	6497.54	-1003.38	734.20	6463.54	6497.54	-1047.00	1080.30	-54.56	348.84	212.70	1.64	F		
6693.36†	6564.83	-1014.96	736.83	6530.70	6564.70	-1047.00	1080.30	-89.74	344.96	214.71	1.61	F		
6725.00†	6595.97	-1020.39	735.57	6561.97	6595.97	-1047.00	1080.30	-105.99	345.76	215.64	1.61	F		
6825.00†	6693.34	-1037.59	721.30	6659.34	6693.34	-1047.00	1080.30	-139.40	359.13	219.04	1.64	F		
6925.00†	6787.24	-1054.57	691.74	6753.24	6787.24	-1047.00	1080.30	-154.86	388.64	222.32	1.75	F		
7025.00†	6875.37	-1070.91	647.62	6841.37	6875.37	-1047.00	1080.30	-163.43	433.34	225.19	1.93	F		
7125.00†	6955.55	-1086.20	590.03	6921.55	6955.55	-1047.00	1080.30	-169.02	491.84	227.68	2.16	F		
7225.00†	7025.81	-1100.06	520.38	6991.81	7025.81	-1047.00	1080.30	-173.17	562.43	229.78	2.45	F		
7325.00†	7084.42	-1112.16	440.40	7050.42	7084.42	-1047.00	1080.30	-176.79	643.21	231.47	2.78	F		
7425.00†	7129.94	-1122.20	352.04	7095.94	7129.94	-1047.00	1080.30	-179.10	732.13	232.73	3.15	F		
7525.00†	7161.25	-1129.93	257.49	7127.25	7161.25	-1047.00	1080.30	-172.05	826.98	233.57	3.55	F		
7625.00†	7177.57	-1135.16	159.08	7143.57	7177.57	-1047.00	1080.30	147.13	925.43	233.99	3.96	F		
7682.94	7180.00	-1136.99	101.24	7146.00	7180.00	-1047.00	1080.30	87.54	983.19	234.05	4.21	F		

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: ALICE M. HOFFNER #1-22 AWB Offset Wellpath: ALICE M. HOFFNER #1-22 AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 105 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

HOLE & CASING SECTIONS - Offset Wellbore: ALICE M. HOFFNER #1-22 AWB Offset Wellpath: ALICE M. HOFFNER #1-22 AWP

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
12.25in Open Hole	0.00	418.00	418.00	9.00	427.00	-638.24	658.57	-638.24	658.57
8.625in Casing Surface	0.00	418.00	418.00	9.00	427.00	-638.24	658.57	-638.24	658.57

WELLPATH COMPOSITION - Offset Wellbore: ALICE M. HOFFNER #1-22 AWB Offset Wellpath: ALICE M. HOFFNER #1-22 AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
0.00	7300.00	Drift Indicator - Inclination Only (Actual Survey)	DRIFT INDICATOR TO TD <7300' FROM CO WEBSITE>	ALICE M. HOFFNER #1-22 AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: ALICE M. HOFFNER #1-22 AWB Offset Wellpath: ALICE M. HOFFNER #1-22 AWP

MD Reference: Rig on SLOT#01EX:ALICE M. HOFFNER #1-22 (1980'FNL & 835'FWL SEC.22) (RT)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	0.00ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 106 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DONN 30N-20B-L PWB Offset Wellpath: DONN 30N-20B-L PWP (REV-B.0)

Facility: SEC.21-T06N-R66W Slot: SLOT#14 DONN 30N-20B-L (758'FNL & 250'FEL, SEC.21) Well: DONN 30N-20B-L Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	27.00	25.00	179.97	1.39	0.44	179.98	1.57	296.72	PASS	
125.00†	125.00	0.00	0.00	127.00	125.00	179.97	1.39	0.44	179.98	1.89	192.78	PASS	
225.00†	225.00	0.00	0.00	227.00	225.00	179.97	1.39	0.44	179.98	2.46	119.40	PASS	
300.00	300.00	0.00	0.00	301.94	299.94	179.97	1.39	0.44	179.98	2.91	92.00	PASS	
325.00†	325.00	-0.09	0.06	326.14	324.14	180.03	1.49	-143.34	180.13	3.06	85.59	PASS	
425.00†	424.96	-2.20	1.61	422.85	420.82	181.33	3.65	-143.10	183.59	3.93	61.57	PASS	
525.00†	524.77	-7.13	5.22	519.18	516.97	184.30	8.57	-142.60	191.62	5.22	44.79	PASS	
625.00†	624.30	-14.86	10.88	614.82	612.18	188.90	16.18	-141.89	204.19	6.31	38.03	PASS	
725.00†	723.44	-25.39	18.59	709.48	706.08	195.07	26.40	-141.04	221.28	7.31	34.72	PASS	
825.00†	822.07	-38.71	28.34	806.72	802.27	202.43	38.60	-140.33	242.17	8.16	33.51	PASS	
895.18	890.91	-49.71	36.39	874.99	869.81	207.61	47.17	-140.16	258.41	8.72	33.19	PASS	
925.00†	920.09	-54.67	40.02	903.93	898.44	209.80	50.81	-140.22	265.58	8.93	33.23	PASS	
1025.00†	1017.94	-71.32	52.20	1000.99	994.45	217.17	63.00	-140.42	289.64	9.59	33.48	PASS	
1125.00†	1115.79	-87.96	64.39	1098.05	1090.45	224.53	75.20	-140.59	313.70	10.28	33.57	PASS	
1225.00†	1213.64	-104.60	76.57	1195.11	1186.46	231.89	87.39	-140.74	337.76	10.51	35.27	PASS	
1325.00†	1311.48	-121.25	88.76	1292.17	1282.47	239.25	99.58	-140.86	361.82	11.78	33.35	PASS	
1425.00†	1409.33	-137.89	100.94	1389.23	1378.48	246.61	111.78	-140.97	385.89	12.50	33.36	PASS	
1525.00†	1507.18	-154.53	113.12	1486.28	1474.49	253.97	123.97	-141.07	409.96	13.27	33.22	PASS	
1625.00†	1605.03	-171.18	125.31	1583.34	1570.49	261.33	136.16	-141.15	434.02	14.06	33.07	PASS	
1725.00†	1702.88	-187.82	137.49	1680.40	1666.50	268.69	148.36	-141.23	458.09	14.85	32.91	PASS	
1825.00†	1800.73	-204.47	149.67	1777.46	1762.51	276.05	160.55	-141.30	482.16	15.15	33.33	PASS	
1925.00†	1898.58	-221.11	161.86	1874.52	1858.52	283.41	172.75	-141.36	506.23	15.38	34.44	PASS	
2025.00†	1996.43	-237.75	174.04	1971.58	1954.52	290.78	184.94	-141.42	530.30	15.58	35.61	PASS	
2125.00†	2094.28	-254.40	186.22	2068.64	2050.53	298.14	197.13	-141.47	554.37	15.86	36.55	PASS	
2225.00†	2192.13	-271.04	198.41	2165.70	2146.54	305.50	209.33	-141.52	578.44	16.20	37.29	PASS	
2325.00†	2289.98	-287.68	210.59	2262.75	2242.55	312.86	221.52	-141.56	602.51	16.62	37.82	PASS	
2425.00†	2387.83	-304.33	222.77	2359.81	2338.56	320.22	233.71	-141.60	626.58	17.10	38.19	PASS	
2525.00†	2485.68	-320.97	234.96	2456.87	2434.56	327.58	245.91	-141.64	650.66	17.64	38.40	PASS	
2625.00†	2583.53	-337.62	247.14	2553.93	2530.57	334.94	258.10	-141.68	674.73	18.23	38.48	PASS	
2725.00†	2681.38	-354.26	259.33	2650.99	2626.58	342.30	270.30	-141.71	698.80	18.86	38.45	PASS	
2825.00†	2779.23	-370.90	271.51	2748.05	2722.59	349.66	282.49	-141.74	722.87	19.54	38.34	PASS	
2925.00†	2877.08	-387.55	283.69	2845.11	2818.60	357.02	294.68	-141.77	746.95	20.26	38.16	PASS	
3025.00†	2974.93	-404.19	295.88	2942.16	2914.60	364.39	306.88	-141.79	771.02	21.02	37.93	PASS	
3125.00†	3072.78	-420.83	308.06	3039.22	3010.61	371.75	319.07	-141.82	795.09	21.80	37.66	PASS	
3225.00†	3170.63	-437.48	320.24	3136.28	3106.62	379.11	331.27	-141.84	819.17	22.61	37.37	PASS	
3325.00†	3268.48	-454.12	332.43	3233.34	3202.63	386.47	343.46	-141.86	843.24	23.45	37.05	PASS	
3425.00†	3366.33	-470.77	344.61	3330.40	3298.63	393.83	355.65	-141.88	867.31	24.31	36.72	PASS	
3525.00†	3464.18	-487.41	356.79	3427.46	3394.64	401.19	367.85	-141.90	891.39	25.18	36.39	PASS	
3625.00†	3562.03	-504.05	368.98	3524.52	3490.65	408.55	380.04	-141.92	915.46	26.08	36.06	PASS	
3725.00†	3659.88	-520.70	381.16	3621.57	3586.66	415.91	392.23	-141.94	939.53	26.99	35.72	PASS	
3825.00†	3757.73	-537.34	393.34	3718.63	3682.67	423.27	404.43	-141.96	963.61	27.92	35.39	PASS	
3925.00†	3855.57	-553.98	405.53	3815.69	3778.67	430.63	416.62	-141.97	987.68	28.85	35.07	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 107 of 202



REFERENCE WELLPATH IDENTIFICATION			
Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

POSITIONAL UNCERTAINTY - Offset Wellbore: DONN 30N-20B-L PWB Offset Wellpath: DONN 30N-20B-L PWP (REV-B.0)			
Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical 1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical 3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: DONN 30N-20B-L PWB Offset Wellpath: DONN 30N-20B-L PWP (REV-B.0)									
String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
13.5in Open Hole	25.00	1750.00	1725.00	23.00	1735.35	109.71	0.85	138.36	48.31
9.625in Casing Surface	25.00	1750.00	1725.00	23.00	1735.35	109.71	0.85	138.36	48.31
8.5in Open Hole	1750.00	17763.35	16013.35	1735.35	6964.00	138.36	48.31	182.42	-3107.93

SURVEY PROGRAM - Offset Wellbore: DONN 30N-20B-L PWB Offset Wellpath: DONN 30N-20B-L PWP (REV-B.0)				
Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
25.00	1750.00	Custom BHI NaviTrak (Standard Rotating+Axial Corr) (Rockies 0.03Gt model)		DONN 30N-20B-L PWB
1750.00	17763.35	Custom BHI AutoTrak Curve (IFR1, Short) (Rockies 0.03Gt model)		DONN 30N-20B-L PWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: DONN 30N-20B-L PWB Offset Wellpath: DONN 30N-20B-L PWP (REV-B.0)	
MD Reference: PRECISION DRILLING (25') (RKB)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	25.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 108 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. FRITZLER 2-2-21 AWP Offset Wellpath: EX. FRITZLER 2-2-21 AWP

Facility: SEC.21-T06N-66W Slot: SLOT#04 EX. FRITZLER 2-2-21(1707'FNL & 569'FWL, PR, NB/CD) Well: EX. FRITZLER 2-2-21 Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	-5.00	25.00	-851.00	-4485.82	-100.74	4565.83	25.57	185.55	PASS	
125.00†	125.00	0.00	0.00	948.32	971.13	-806.74	-4398.07	-100.39	4550.80	78.64	58.57	PASS	
225.00†	225.00	0.00	0.00	1027.68	1049.08	-800.42	-4384.61	-100.35	4532.61	82.34	55.69	PASS	
300.00	300.00	0.00	0.00	1123.41	1142.99	-792.55	-4367.76	-100.29	4518.42	86.78	52.64	PASS	
325.00†	325.00	-0.09	0.06	1134.47	1153.84	-791.65	-4365.85	116.01	4513.84	87.33	52.25	PASS	
425.00†	424.96	-2.20	1.61	1178.84	1197.46	-788.23	-4358.46	116.35	4497.21	89.53	50.76	PASS	
525.00†	524.77	-7.13	5.22	1297.29	1314.00	-779.43	-4339.20	116.77	4482.56	95.18	47.57	PASS	
625.00†	624.30	-14.86	10.88	1348.03	1363.95	-775.78	-4331.05	117.09	4469.73	97.72	46.19	PASS	
725.00†	723.44	-25.39	18.59	1412.60	1427.63	-771.40	-4321.32	117.41	4459.51	100.88	44.62	PASS	
825.00†	822.07	-38.71	28.34	1491.33	1505.28	-765.14	-4309.90	117.75	4451.38	104.66	42.92	PASS	
895.18	890.91	-49.71	36.39	1531.21	1544.62	-761.68	-4304.41	117.95	4447.11	106.54	42.11	PASS	
925.00†	920.09	-54.67	40.02	1548.10	1561.30	-760.19	-4302.17	118.00	4445.62	107.34	41.78	PASS	
1025.00†	1017.94	-71.32	52.20	1766.40	1776.25	-739.15	-4270.51	118.72	4439.25	117.37	38.13	PASS	
1125.00†	1115.79	-87.96	64.39	1806.58	1815.75	-734.88	-4264.50	118.86	4432.58	119.26	37.46	PASS	
1225.00†	1213.64	-104.60	76.57	1957.50	1964.23	-718.92	-4242.79	119.38	4426.93	126.13	35.36	PASS	
1325.00†	1311.48	-121.25	88.76	1981.66	1988.01	-716.60	-4239.19	119.46	4420.78	127.33	34.98	PASS	
1425.00†	1409.33	-137.89	100.94	2005.97	2012.01	-714.51	-4235.93	119.53	4416.35	128.51	34.62	PASS	
1525.00†	1507.18	-154.53	113.12	2030.41	2036.21	-712.68	-4233.02	119.61	4413.65	129.65	34.29	PASS	
1625.00†	1605.03	-171.18	125.31	2131.90	2136.87	-706.12	-4221.93	119.91	4412.20	134.46	33.04	PASS	
1725.00†	1702.88	-187.82	137.49	2243.63	2247.58	-698.35	-4209.01	120.25	4410.14	139.73	31.78	PASS	
1825.00†	1800.73	-204.47	149.67	2301.63	2305.10	-694.70	-4202.49	120.42	4408.63	142.17	31.16	PASS	
1925.00†	1898.58	-221.11	161.86	2389.06	2391.92	-690.35	-4193.15	120.67	4407.91	146.32	30.27	PASS	
2025.00†	1996.43	-237.75	174.04	2791.37	2789.28	-662.80	-4137.59	121.88	4404.48	165.60	26.71	PASS	
2125.00†	2094.28	-254.40	186.22	2839.36	2836.38	-658.61	-4129.46	122.03	4397.63	167.91	26.30	PASS	
2225.00†	2192.13	-271.04	198.41	2870.39	2866.94	-656.06	-4124.68	122.13	4392.34	169.40	26.03	PASS	
2325.00†	2289.98	-287.68	210.59	2941.90	2937.53	-650.66	-4114.62	122.36	4388.46	172.79	25.50	PASS	
2425.00†	2387.83	-304.33	222.77	3098.53	3091.96	-639.17	-4091.14	122.84	4383.81	180.28	24.41	PASS	
2525.00†	2485.68	-320.97	234.96	3155.53	3148.17	-635.27	-4082.53	123.01	4379.31	183.04	24.01	PASS	
2625.00†	2583.53	-337.62	247.14	3217.94	3209.82	-631.51	-4073.61	123.19	4375.79	186.05	23.61	PASS	
2725.00†	2681.38	-354.26	259.33	3294.32	3285.35	-626.68	-4063.28	123.42	4373.09	189.72	23.13	PASS	
2825.00†	2779.23	-370.90	271.51	3502.60	3490.76	-611.36	-4032.51	124.07	4369.06	199.64	21.96	PASS	
2925.00†	2877.08	-387.55	283.69	3710.52	3694.83	-593.90	-3996.86	124.74	4362.85	209.46	20.90	PASS	
3025.00†	2974.93	-404.19	295.88	3791.29	3773.92	-586.41	-3982.30	125.01	4355.96	213.32	20.48	PASS	
3125.00†	3072.78	-420.83	308.06	3876.68	3857.57	-578.38	-3967.12	125.30	4349.47	217.37	20.07	PASS	
3225.00†	3170.63	-437.48	320.24	3952.87	3932.23	-571.09	-3953.81	125.56	4343.43	220.96	19.72	PASS	
3325.00†	3268.48	-454.12	332.43	4017.04	3995.19	-564.99	-3943.02	125.78	4338.19	223.98	19.43	PASS	
3425.00†	3366.33	-470.77	344.61	4092.95	4069.75	-557.76	-3930.73	126.04	4333.70	227.47	19.11	PASS	
3525.00†	3464.18	-487.41	356.79	4178.74	4154.06	-549.52	-3917.17	126.33	4329.73	231.40	18.77	PASS	
3625.00†	3562.03	-504.05	368.98	4319.55	4292.36	-536.30	-3894.21	126.82	4325.41	237.83	18.24	PASS	
3725.00†	3659.88	-520.70	381.16	4361.02	4333.09	-532.36	-3887.53	126.96	4321.47	239.72	18.08	PASS	
3825.00†	3757.73	-537.34	393.34	4413.10	4384.36	-527.40	-3879.84	127.14	4318.90	242.05	17.89	PASS	
3925.00†	3855.57	-553.98	405.53	4547.33	4516.42	-514.57	-3859.50	127.60	4316.11	248.04	17.45	PASS	
4025.00†	3953.42	-570.63	417.71	4616.28	4584.26	-508.05	-3849.07	127.84	4313.62	251.08	17.23	PASS	
4125.00†	4051.27	-587.27	429.90	4670.17	4637.36	-502.93	-3841.41	128.03	4312.15	253.39	17.06	PASS	
4225.00†	4149.12	-603.92	442.08	4738.48	4704.75	-496.50	-3832.31	128.26	4311.69	256.26	16.87	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 109 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. FRITZLER 2-2-21 AWP Offset Wellpath: EX. FRITZLER 2-2-21 AWP

Facility: SEC.21-T06N-66W Slot: SLOT#04 EX. FRITZLER 2-2-21(1707'FNL & 569'FWL, PR, NB/CD) Well: EX. FRITZLER 2-2-21 Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
4325.00†	4246.97	-620.56	454.26	4797.61	4763.16	-491.16	-3824.76	128.46	4311.99	258.67	16.71	PASS	
4425.00†	4344.82	-637.20	466.45	4842.67	4807.74	-487.26	-3819.54	128.61	4313.52	260.39	16.61	PASS	
4525.00†	4442.67	-653.85	478.63	4891.44	4856.08	-483.24	-3814.47	128.77	4316.33	262.20	16.50	PASS	
4625.00†	4540.52	-670.49	490.81	4945.02	4909.27	-479.17	-3809.46	128.94	4320.29	264.14	16.40	PASS	
4725.00†	4638.37	-687.13	503.00	4994.09	4958.05	-475.82	-3805.38	129.09	4325.39	265.82	16.31	PASS	
4825.00†	4736.22	-703.78	515.18	5040.77	5004.53	-473.07	-3802.07	129.23	4331.73	267.35	16.24	PASS	
4925.00†	4834.07	-720.42	527.36	5082.36	5046.00	-471.00	-3799.63	129.35	4339.36	268.54	16.20	PASS	
5025.00†	4931.92	-737.07	539.55	5120.71	5084.28	-469.46	-3797.93	129.45	4348.40	269.49	16.18	PASS	
5125.00†	5029.77	-753.71	551.73	5160.70	5124.23	-468.23	-3796.73	129.55	4358.85	270.28	16.17	PASS	
5225.00†	5127.62	-770.35	563.91	5206.66	5170.18	-467.30	-3795.95	129.66	4370.59	270.60	16.19	PASS	
5325.00†	5225.47	-787.00	576.10	5256.27	5219.79	-466.86	-3795.74	129.77	4383.55	270.56	16.24	PASS	
5425.00†	5323.32	-803.64	588.28	5327.06	5290.56	-466.70	-3796.04	129.92	4397.37	268.60	16.41	PASS	
5525.00†	5421.17	-820.28	600.47	5399.33	5362.83	-466.93	-3796.81	130.06	4411.84	265.47	16.66	PASS	
5625.00†	5519.02	-836.93	612.65	5471.97	5435.46	-467.65	-3798.04	130.20	4426.91	262.11	16.93	PASS	
5725.00†	5616.87	-853.57	624.83	5548.02	5511.48	-468.92	-3799.80	130.34	4442.57	258.72	17.22	PASS	
5825.00†	5714.72	-870.22	637.02	5638.65	5602.07	-470.48	-3802.17	130.50	4458.57	255.09	17.52	PASS	
5925.00†	5812.57	-886.86	649.20	5732.19	5695.57	-471.88	-3804.74	130.67	4474.76	251.34	17.85	PASS	
6025.00†	5910.42	-903.50	661.38	5852.24	5815.57	-472.98	-3807.70	130.90	4490.77	246.30	18.28	PASS	
6125.00†	6008.27	-920.15	673.57	5957.83	5921.14	-473.19	-3809.79	131.11	4506.42	241.68	18.70	PASS	
6225.00†	6106.12	-936.79	685.75	6051.65	6014.94	-472.96	-3811.63	131.29	4522.15	237.40	19.10	PASS	
6325.00†	6203.97	-953.43	697.93	6150.79	6114.06	-472.35	-3813.58	131.50	4537.99	233.18	19.52	PASS	
6425.00†	6301.82	-970.08	710.12	6254.38	6217.63	-471.53	-3815.49	131.71	4553.76	228.99	19.95	PASS	
6525.00†	6399.66	-986.72	722.30	6357.96	6321.19	-470.52	-3817.24	131.92	4569.47	224.84	20.38	PASS	
6605.93	6478.85	-1000.19	732.16	6439.96	6403.18	-469.61	-3818.52	132.09	4582.13	221.99	20.70	PASS	
6625.00†	6497.54	-1003.38	734.20	6459.21	6422.42	-469.39	-3818.81	124.81	4584.83	221.34	20.78	PASS	
6725.00†	6595.97	-1020.39	735.57	6560.71	6523.90	-468.15	-3820.30	76.31	4589.78	218.02	21.12	PASS	
6825.00†	6693.34	-1037.59	721.30	6660.71	6623.89	-466.83	-3821.69	46.10	4579.22	215.21	21.34	PASS	
6925.00†	6787.24	-1054.57	691.74	6741.09	6704.25	-465.79	-3822.91	33.86	4553.63	212.84	21.46	PASS	
7025.00†	6875.37	-1070.91	647.62	6816.99	6780.13	-464.94	-3824.30	28.53	4513.79	210.34	21.53	PASS	
7125.00†	6955.55	-1086.20	590.03	6886.61	6849.74	-464.25	-3825.78	26.35	4460.65	207.87	21.53	PASS	
7225.00†	7025.81	-1100.06	520.38	6951.93	6915.03	-463.69	-3827.34	26.19	4395.45	205.44	21.47	PASS	
7325.00†	7084.42	-1112.16	440.40	7033.62	6996.70	-463.10	-3829.13	28.15	4319.48	202.52	21.40	PASS	
7425.00†	7129.94	-1122.20	352.04	7096.96	7060.03	-462.72	-3830.26	32.81	4234.55	200.10	21.23	PASS	
7525.00†	7161.25	-1129.93	257.49	7140.63	7103.70	-462.51	-3830.89	42.64	4142.91	198.29	20.96	PASS	
7625.00†	7177.57	-1135.16	159.08	7163.93	7126.99	-462.41	-3831.19	64.62	4046.90	197.14	20.60	PASS	
7682.94	7180.00	-1136.99	101.24	7168.03	7131.09	-462.39	-3831.24	87.21	3990.22	196.80	20.35	PASS	
7725.00†	7179.88	-1138.00	59.19	7168.52	7131.58	-462.39	-3831.24	87.24	3948.96	196.63	20.15	PASS	
7825.00†	7179.59	-1140.39	-40.78	7169.65	7132.71	-462.38	-3831.26	87.33	3850.92	196.25	19.69	PASS	
7925.00†	7179.29	-1142.78	-140.75	7170.77	7133.83	-462.38	-3831.27	87.41	3752.99	195.88	19.23	PASS	
8025.00†	7179.00	-1145.17	-240.72	7171.87	7134.93	-462.38	-3831.28	87.49	3655.17	195.53	18.76	PASS	
8125.00†	7178.71	-1147.56	-340.69	7172.95	7136.01	-462.37	-3831.29	87.57	3557.47	195.19	18.29	PASS	
8225.00†	7178.42	-1149.95	-440.66	7174.02	7137.08	-462.37	-3831.31	87.65	3459.90	194.87	17.82	PASS	
8325.00†	7178.13	-1152.34	-540.63	7175.07	7138.13	-462.36	-3831.32	87.73	3362.48	194.58	17.34	PASS	
8425.00†	7177.84	-1154.73	-640.61	7176.11	7139.17	-462.36	-3831.33	87.81	3265.21	194.33	16.86	PASS	
8525.00†	7177.55	-1157.12	-740.58	7177.13	7140.19	-462.35	-3831.34	87.88	3168.11	194.11	16.38	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 110 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. FRITZLER 2-2-21 AWB Offset Wellpath: EX. FRITZLER 2-2-21 AWP

Facility: SEC.21-T06N-66W Slot: SLOT#04 EX. FRITZLER 2-2-21 (1707'FNL & 569'FWL, PR, NB/CD) Well: EX. FRITZLER 2-2-21 Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
8625.00†	7177.25	-1159.52	-840.55	7178.14	7141.20	-462.35	-3831.35	87.96	3071.20	193.93	15.89	PASS	
8725.00†	7176.96	-1161.91	-940.52	7179.13	7142.19	-462.35	-3831.36	88.03	2974.49	193.80	15.40	PASS	
8825.00†	7176.67	-1164.30	-1040.49	7180.11	7143.17	-462.34	-3831.37	88.11	2878.00	193.74	14.91	PASS	
8925.00†	7176.38	-1166.69	-1140.46	7181.08	7144.14	-462.34	-3831.38	88.18	2781.77	193.74	14.41	PASS	
9025.00†	7176.09	-1169.08	-1240.43	7182.03	7145.09	-462.34	-3831.40	88.25	2685.80	193.83	13.90	PASS	
9125.00†	7175.80	-1171.47	-1340.40	7182.97	7146.03	-462.33	-3831.41	88.32	2590.15	194.02	13.40	PASS	
9225.00†	7175.51	-1173.86	-1440.37	7183.90	7146.96	-462.33	-3831.42	88.39	2494.83	194.32	12.88	PASS	
9325.00†	7175.21	-1176.25	-1540.34	7184.81	7147.87	-462.33	-3831.43	88.46	2399.89	194.74	12.36	PASS	
9425.00†	7174.92	-1178.64	-1640.32	7185.71	7148.77	-462.32	-3831.44	88.52	2305.39	195.33	11.84	PASS	
9525.00†	7174.63	-1181.03	-1740.29	7186.60	7149.66	-462.32	-3831.44	88.59	2211.36	196.09	11.31	PASS	
9625.00†	7174.34	-1183.42	-1840.26	7187.49	7150.54	-462.32	-3831.45	88.66	2117.88	197.06	10.78	PASS	
9725.00†	7174.05	-1185.82	-1940.23	7188.35	7151.41	-462.31	-3831.46	88.72	2025.03	198.27	10.25	PASS	
9825.00†	7173.76	-1188.21	-2040.20	7189.21	7152.27	-462.31	-3831.47	88.78	1932.89	199.77	9.71	PASS	
9925.00†	7173.47	-1190.60	-2140.17	7190.05	7153.11	-462.31	-3831.48	88.85	1841.56	201.61	9.16	PASS	
10025.00†	7173.17	-1192.99	-2240.14	7190.89	7153.94	-462.30	-3831.49	88.91	1751.19	203.86	8.62	PASS	
10125.00†	7172.88	-1195.38	-2340.11	7191.71	7154.77	-462.30	-3831.50	88.97	1661.92	206.60	8.07	PASS	
10225.00†	7172.59	-1197.77	-2440.08	7192.52	7155.58	-462.30	-3831.51	89.03	1573.93	209.92	7.52	PASS	
10325.00†	7172.30	-1200.16	-2540.05	7193.32	7156.38	-462.29	-3831.52	89.09	1487.47	213.95	6.97	PASS	
10425.00†	7172.01	-1202.55	-2640.03	7194.11	7157.17	-462.29	-3831.52	89.15	1402.81	218.86	6.43	PASS	
10525.00†	7171.72	-1204.94	-2740.00	7194.90	7157.95	-462.29	-3831.53	89.21	1320.29	224.84	5.89	PASS	
10625.00†	7171.42	-1207.33	-2839.97	7195.67	7158.73	-462.29	-3831.54	89.27	1240.35	232.14	5.36	PASS	
10725.00†	7171.13	-1209.72	-2939.94	7196.43	7159.49	-462.28	-3831.55	89.32	1163.52	241.07	4.84	PASS	
10825.00†	7170.84	-1212.11	-3039.91	7197.18	7160.24	-462.28	-3831.55	89.38	1090.44	251.97	4.34	PASS	
10925.00†	7170.55	-1214.51	-3139.88	7197.93	7160.99	-462.28	-3831.56	89.43	1021.94	265.18	3.86	PASS	
11025.00†	7170.26	-1216.90	-3239.85	7198.66	7161.72	-462.28	-3831.57	89.49	958.99	280.99	3.42	PASS	
11125.00†	7169.97	-1219.29	-3339.82	7199.39	7162.45	-462.27	-3831.58	89.54	902.75	299.45	3.02	PASS	
11225.00†	7169.68	-1221.68	-3439.79	7200.11	7163.17	-462.27	-3831.58	89.60	854.54	320.27	2.67	PASS	
11325.00†	7169.38	-1224.07	-3539.76	7200.82	7163.87	-462.27	-3831.59	89.65	815.80	342.59	2.38	PASS	
11425.00†	7169.09	-1226.46	-3639.74	7201.52	7164.57	-462.27	-3831.60	89.70	787.92	364.97	2.16	PASS	
11525.00†	7168.80	-1228.85	-3739.71	7202.21	7165.27	-462.26	-3831.60	89.75	772.08	385.60	2.00	PASS	
11596.95†	7168.59	-1230.57	-3811.64	7204.01	7167.07	-462.26	-3831.62	89.89	768.58	398.28	1.93	PASS	
11625.00†	7168.51	-1231.24	-3839.68	7202.89	7165.95	-462.26	-3831.61	89.80	769.03	402.63	1.91	PASS	
11725.00†	7168.22	-1233.63	-3939.65	7203.57	7166.63	-462.26	-3831.62	89.85	778.90	414.77	1.88	PASS	
11825.00†	7167.93	-1236.02	-4039.62	7204.24	7167.30	-462.26	-3831.62	89.90	801.24	421.53	1.90	PASS	
11925.00†	7167.64	-1238.41	-4139.59	7204.90	7167.96	-462.25	-3831.63	89.95	835.02	423.31	1.97	PASS	
12025.00†	7167.34	-1240.81	-4239.56	7205.55	7168.61	-462.25	-3831.64	90.00	878.95	421.02	2.09	PASS	
12125.00†	7167.05	-1243.20	-4339.53	7206.20	7169.26	-462.25	-3831.64	90.05	931.58	415.81	2.24	PASS	
12225.00†	7166.76	-1245.59	-4439.50	7206.84	7169.89	-462.25	-3831.65	90.10	991.52	408.73	2.43	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: EX. FRITZLER 2-2-21 AWB Offset Wellpath: EX. FRITZLER 2-2-21 AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 111 of 202



REFERENCE WELLPATH IDENTIFICATION			
Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

WELLPATH COMPOSITION - Offset Wellbore: EX. FRITZLER 2-2-21 AWB Offset Wellpath: EX. FRITZLER 2-2-21 AWP				
Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
0.00	7404.00	BHI Unknown Tool (Standard)	MS ENERGY SERVICES DIRECTIONAL SURVEY FROM COGCC <80-7404>	EX. FRITZLER 2-2-21 AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: EX. FRITZLER 2-2-21 AWB Offset Wellpath: EX. FRITZLER 2-2-21 AWP	
MD Reference: Rig on SLOT#04 EX. FRTIZLER 2-2-21(1707'FNL & 569'FWL, PR, NB/CD) (RT)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	0.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 112 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: HOOD 25N-22C-M AWB Offset Wellpath: HOOD 25N-22C-M AWP

Facility: SEC.20-T06N-R66W			Slot: SLOT#01 HOOD 25N-22C-M (765'FSL & 1122'FEL SEC.20)				Well: HOOD 25N-22C-M		Threshold Value=1.00 † = interpolated/extrapolated station				
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	1675.03	1659.89	-3449.64	-6082.22	-119.56	7180.97	50.46	145.05	PASS	
125.00†	125.00	0.00	0.00	1815.31	1793.33	-3408.44	-6068.98	-119.32	7157.74	50.56	144.18	PASS	
225.00†	225.00	0.00	0.00	12718.99	7086.09	-1846.94	34.92	178.92	7105.42	116.53	61.45	PASS	
300.00	300.00	0.00	0.00	12719.13	7086.09	-1846.93	35.07	178.91	7033.03	117.03	60.56	PASS	
325.00†	325.00	-0.09	0.06	12719.21	7086.09	-1846.93	35.15	36.20	7008.89	117.20	60.27	PASS	
425.00†	424.96	-2.20	1.61	12720.09	7086.10	-1846.90	36.03	41.11	6911.94	117.85	59.10	PASS	
525.00†	524.77	-7.13	5.22	12721.89	7086.11	-1846.84	37.82	47.13	6814.45	118.48	57.96	PASS	
625.00†	624.30	-14.86	10.88	12724.63	7086.12	-1846.74	40.56	54.51	6716.53	119.06	56.84	PASS	
725.00†	723.44	-25.39	18.59	12728.33	7086.14	-1846.61	44.26	63.42	6618.27	119.61	55.75	PASS	
825.00†	822.07	-38.71	28.34	12733.01	7086.17	-1846.45	48.94	73.84	6519.77	120.10	54.70	PASS	
895.18	890.91	-49.71	36.39	12736.89	7086.20	-1846.31	52.82	81.85	6450.56	120.42	53.97	PASS	
925.00†	920.09	-54.67	40.02	12738.65	7086.21	-1846.25	54.58	81.78	6421.14	120.55	53.67	PASS	
1025.00†	1017.94	-71.32	52.20	12744.61	7086.26	-1846.04	60.53	81.57	6322.52	120.99	52.65	PASS	
1125.00†	1115.79	-87.96	64.39	12750.67	7086.32	-1845.83	66.59	81.35	6223.94	121.45	51.63	PASS	
1225.00†	1213.64	-104.60	76.57	12756.84	7086.38	-1845.62	72.75	81.12	6125.38	121.92	50.61	PASS	
1325.00†	1311.48	-121.25	88.76	12763.11	7086.46	-1845.40	79.01	80.89	6026.86	122.42	49.60	PASS	
1425.00†	1409.33	-137.89	100.94	12769.48	7086.54	-1845.18	85.38	80.66	5928.38	122.93	48.58	PASS	
1525.00†	1507.18	-154.53	113.12	12775.97	7086.63	-1844.95	91.87	80.41	5829.93	123.46	47.57	PASS	
1625.00†	1605.03	-171.18	125.31	12782.56	7086.72	-1844.72	98.46	80.16	5731.53	124.01	46.56	PASS	
1725.00†	1702.88	-187.82	137.49	12789.28	7086.83	-1844.49	105.17	79.91	5633.16	124.58	45.55	PASS	
1825.00†	1800.73	-204.47	149.67	12796.11	7086.95	-1844.26	112.00	79.64	5534.84	124.96	44.54	PASS	
1925.00†	1898.58	-221.11	161.86	12808.16	7087.17	-1843.85	124.04	79.17	5436.55	125.66	43.50	PASS	
2025.00†	1996.43	-237.75	174.04	12823.74	7087.43	-1843.35	139.60	78.55	5338.30	126.43	42.45	PASS	
2125.00†	2094.28	-254.40	186.22	12839.15	7087.68	-1842.89	155.00	77.92	5240.07	127.24	41.41	PASS	
2225.00†	2192.13	-271.04	198.41	12854.39	7087.91	-1842.46	170.24	77.28	5141.86	128.06	40.37	PASS	
2325.00†	2289.98	-287.68	210.59	12869.47	7088.11	-1842.08	185.31	76.64	5043.69	128.91	39.34	PASS	
2425.00†	2387.83	-304.33	222.77	12884.38	7088.30	-1841.73	200.22	75.98	4945.56	129.79	38.31	PASS	
2525.00†	2485.68	-320.97	234.96	12894.02	7088.42	-1841.52	209.85	75.55	4847.46	130.61	37.31	PASS	
2625.00†	2583.53	-337.62	247.14	12902.05	7088.51	-1841.37	217.88	75.19	4749.42	131.43	36.33	PASS	
2725.00†	2681.38	-354.26	259.33	12910.16	7088.62	-1841.24	226.00	74.81	4651.45	132.28	35.35	PASS	
2825.00†	2779.23	-370.90	271.51	12918.36	7088.72	-1841.13	234.19	74.43	4553.53	133.17	34.37	PASS	
2925.00†	2877.08	-387.55	283.69	12926.65	7088.83	-1841.04	242.48	74.04	4455.69	134.11	33.40	PASS	
3025.00†	2974.93	-404.19	295.88	12935.02	7088.94	-1840.98	250.85	73.64	4357.92	135.08	32.43	PASS	
3125.00†	3072.78	-420.83	308.06	12943.48	7089.05	-1840.93	259.31	73.23	4260.22	136.10	31.46	PASS	
3225.00†	3170.63	-437.48	320.24	12952.03	7089.17	-1840.91	267.85	72.81	4162.61	137.16	30.50	PASS	
3325.00†	3268.48	-454.12	332.43	12960.67	7089.29	-1840.91	276.49	72.38	4065.08	138.28	29.54	PASS	
3425.00†	3366.33	-470.77	344.61	12969.40	7089.41	-1840.94	285.22	71.94	3967.65	139.45	28.59	PASS	
3525.00†	3464.18	-487.41	356.79	12979.57	7089.55	-1841.00	295.39	71.42	3870.32	140.71	27.64	PASS	
3625.00†	3562.03	-504.05	368.98	12997.98	7089.81	-1841.13	313.81	70.46	3773.07	142.20	26.66	PASS	
3725.00†	3659.88	-520.70	381.16	13016.07	7090.03	-1841.25	331.89	69.49	3675.90	143.75	25.69	PASS	
3825.00†	3757.73	-537.34	393.34	13033.83	7090.23	-1841.36	349.65	68.52	3578.83	145.37	24.73	PASS	
3925.00†	3855.57	-553.98	405.53	13051.28	7090.41	-1841.46	367.09	67.55	3481.85	147.06	23.79	PASS	
4025.00†	3953.42	-570.63	417.71	13067.91	7090.56	-1841.56	383.72	66.60	3384.97	148.82	22.85	PASS	
4125.00†	4051.27	-587.27	429.90	13078.80	7090.66	-1841.62	394.62	65.97	3288.24	150.54	21.94	PASS	
4225.00†	4149.12	-603.92	442.08	13089.76	7090.75	-1841.71	405.58	65.32	3191.65	152.36	21.04	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 113 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: HOOD 25N-22C-M AWB Offset Wellpath: HOOD 25N-22C-M AWP

Facility: SEC.20-T06N-R66W		Slot: SLOT#01 HOOD 25N-22C-M (765'FSL & 1122'FEL SEC.20)		Well: HOOD 25N-22C-M		Threshold Value=1.00 † = interpolated/extrapolated station							
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
4325.00†	4246.97	-620.56	454.26	13100.79	7090.85	-1841.80	416.61	64.67	3095.24	154.30	20.15	PASS	
4425.00†	4344.82	-637.20	466.45	13111.89	7090.96	-1841.92	427.70	64.00	2999.01	156.35	19.26	PASS	
4525.00†	4442.67	-653.85	478.63	13123.06	7091.06	-1842.05	438.87	63.31	2902.99	158.52	18.39	PASS	
4625.00†	4540.52	-670.49	490.81	13134.30	7091.17	-1842.19	450.11	62.62	2807.19	160.84	17.53	PASS	
4725.00†	4638.37	-687.13	503.00	13145.60	7091.28	-1842.35	461.41	61.91	2711.65	163.32	16.67	PASS	
4825.00†	4736.22	-703.78	515.18	13156.97	7091.40	-1842.53	472.77	61.19	2616.37	165.96	15.83	PASS	
4925.00†	4834.07	-720.42	527.36	13168.25	7091.51	-1842.72	484.05	60.46	2521.40	168.79	15.00	PASS	
5025.00†	4931.92	-737.07	539.55	13179.61	7091.63	-1842.93	495.41	59.72	2426.77	171.83	14.18	PASS	
5125.00†	5029.77	-753.71	551.73	13191.06	7091.76	-1843.15	506.86	58.97	2332.53	175.10	13.37	PASS	
5225.00†	5127.62	-770.35	563.91	13202.60	7091.88	-1843.39	518.39	58.20	2238.71	178.62	12.58	PASS	
5325.00†	5225.47	-787.00	576.10	13214.22	7092.02	-1843.66	530.01	57.42	2145.38	182.43	11.80	PASS	
5425.00†	5323.32	-803.64	588.28	13225.93	7092.16	-1843.93	541.72	56.62	2052.60	186.57	11.04	PASS	
5525.00†	5421.17	-820.28	600.47	13237.73	7092.30	-1844.23	553.51	55.81	1960.45	191.05	10.30	PASS	
5625.00†	5519.02	-836.93	612.65	13250.91	7092.46	-1844.58	566.69	54.89	1869.01	195.98	9.57	PASS	
5725.00†	5616.87	-853.57	624.83	13266.88	7092.64	-1845.01	582.65	53.77	1778.38	201.46	8.86	PASS	
5825.00†	5714.72	-870.22	637.02	13282.55	7092.80	-1845.43	598.31	52.66	1688.68	207.43	8.17	PASS	
5925.00†	5812.57	-886.86	649.20	13297.91	7092.93	-1845.83	613.67	51.55	1600.07	213.95	7.50	PASS	
6025.00†	5910.42	-903.50	661.38	13312.98	7093.04	-1846.23	628.73	50.45	1512.74	221.10	6.86	PASS	
6125.00†	6008.27	-920.15	673.57	13327.77	7093.13	-1846.62	643.52	49.37	1426.95	228.94	6.25	PASS	
6225.00†	6106.12	-936.79	685.75	13340.47	7093.19	-1846.95	656.21	48.43	1342.98	237.45	5.67	PASS	
6325.00†	6203.97	-953.43	697.93	13351.37	7093.25	-1847.26	667.10	47.62	1261.23	246.69	5.12	PASS	
6425.00†	6301.82	-970.08	710.12	13362.35	7093.31	-1847.59	678.09	46.80	1182.17	256.78	4.61	PASS	
6525.00†	6399.66	-986.72	722.30	13373.43	7093.36	-1847.96	689.15	45.96	1106.37	267.69	4.14	PASS	
6605.93	6478.85	-1000.19	732.16	13382.45	7093.41	-1848.27	698.17	45.28	1047.89	277.07	3.79	PASS	
6625.00†	6497.54	-1003.38	734.20	13384.35	7093.42	-1848.34	700.07	36.18	1034.51	279.33	3.71	PASS	
6725.00†	6595.97	-1020.39	735.57	13386.48	7093.43	-1848.42	702.20	-20.95	966.55	291.17	3.33	PASS	
6825.00†	6693.34	-1037.59	721.30	13375.38	7093.37	-1848.02	691.10	-57.86	904.29	302.49	2.99	PASS	
6925.00†	6787.24	-1054.57	691.74	13351.15	7093.25	-1847.25	666.89	-74.69	850.06	312.36	2.73	PASS	
7025.00†	6875.37	-1070.91	647.62	13310.03	7093.02	-1846.15	625.78	-82.57	805.52	319.55	2.52	PASS	
7125.00†	6955.55	-1086.20	590.03	13252.24	7092.47	-1844.62	568.01	-85.76	771.00	323.45	2.39	PASS	
7225.00†	7025.81	-1100.06	520.38	13188.93	7091.73	-1843.11	504.73	-86.71	746.13	324.71	2.30	PASS	
7325.00†	7084.42	-1112.16	440.40	13116.22	7091.00	-1841.97	432.04	-86.16	729.88	323.51	2.26	PASS	
7425.00†	7129.94	-1122.20	352.04	13032.28	7090.22	-1841.35	348.09	-84.81	720.26	320.57	2.25	PASS	
7525.00†	7161.25	-1129.93	257.49	12945.03	7089.07	-1840.93	260.85	-83.51	714.66	317.32	2.26	PASS	
7625.00†	7177.57	-1135.16	159.08	12862.51	7088.02	-1842.25	178.35	-82.75	713.00	314.92	2.27	PASS	
7682.94	7180.00	-1136.99	101.24	12810.25	7087.20	-1843.78	126.12	-82.52	713.29	313.68	2.28	PASS	
7725.00†	7179.88	-1138.00	59.19	12769.07	7086.53	-1845.19	84.97	-82.48	713.79	312.76	2.29	PASS	
7825.00†	7179.59	-1140.39	-40.78	12625.38	7085.94	-1847.70	-58.67	-82.46	713.71	308.03	2.32	PASS	
7925.00†	7179.29	-1142.78	-140.75	12548.29	7085.79	-1846.70	-135.74	-82.44	710.12	307.78	2.31	PASS	
8025.00†	7179.00	-1145.17	-240.72	12477.60	7085.50	-1848.59	-206.40	-82.43	710.44	307.84	2.31	PASS	
8125.00†	7178.71	-1147.56	-340.69	12368.89	7085.32	-1854.64	-314.94	-82.48	713.68	306.14	2.33	PASS	
8225.00†	7178.42	-1149.95	-440.66	12219.15	7084.81	-1852.38	-464.60	-82.41	709.04	301.77	2.35	PASS	
8325.00†	7178.13	-1152.34	-540.63	12134.07	7084.74	-1850.60	-549.66	-82.38	704.54	301.83	2.34	PASS	
8425.00†	7177.84	-1154.73	-640.61	12036.02	7084.64	-1849.65	-647.70	-82.36	701.18	301.06	2.33	PASS	
8525.00†	7177.55	-1157.12	-740.58	11949.45	7084.30	-1849.04	-734.27	-82.33	698.19	301.13	2.32	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 114 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: HOOD 25N-22C-M AWB Offset Wellpath: HOOD 25N-22C-M AWB

Facility: SEC.20-T06N-R66W Slot: SLOT#01 HOOD 25N-22C-M (765'FSL & 1122'FEL SEC.20) Well: HOOD 25N-22C-M Threshold Value=1.00 † = interpolated/extrapolated station															
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status			
8625.00†	7177.25	-1159.52	-840.55	11873.39	7084.18	-1851.11	-810.29	-82.34	698.48	301.79	2.32	PASS			
8725.00†	7176.96	-1161.91	-940.52	11787.83	7084.19	-1856.09	-895.71	-82.39	701.79	301.90	2.33	PASS			
8825.00†	7176.67	-1164.30	-1040.49	11681.99	7083.99	-1862.44	-1001.36	-82.44	705.36	301.18	2.35	PASS			
8925.00†	7176.38	-1166.69	-1140.46	11579.23	7083.82	-1867.86	-1103.97	-82.48	708.20	300.64	2.36	PASS			
9025.00†	7176.09	-1169.08	-1240.43	11431.78	7083.62	-1871.63	-1251.34	-82.50	708.70	297.51	2.39	PASS			
9125.00†	7175.80	-1171.47	-1340.40	11316.50	7083.24	-1867.12	-1366.53	-82.42	702.27	295.93	2.38	PASS			
9225.00†	7175.51	-1173.86	-1440.37	11228.73	7083.01	-1864.72	-1454.26	-82.38	697.16	296.50	2.35	PASS			
9325.00†	7175.21	-1176.25	-1540.34	11132.85	7082.98	-1863.20	-1550.12	-82.35	693.18	296.50	2.34	PASS			
9425.00†	7174.92	-1178.64	-1640.32	11026.99	7082.70	-1861.37	-1655.97	-82.31	689.10	295.79	2.33	PASS			
9525.00†	7174.63	-1181.03	-1740.29	10921.00	7082.31	-1858.37	-1761.92	-82.24	683.94	295.06	2.32	PASS			
9625.00†	7174.34	-1183.42	-1840.26	10822.54	7082.21	-1855.30	-1860.33	-82.19	678.46	294.97	2.30	PASS			
9725.00†	7174.05	-1185.82	-1940.23	10728.36	7082.23	-1852.66	-1954.47	-82.16	673.28	295.23	2.28	PASS			
9825.00†	7173.76	-1188.21	-2040.20	10654.01	7082.12	-1852.48	-2028.82	-82.15	670.67	296.85	2.26	PASS			
9925.00†	7173.47	-1190.60	-2140.17	10588.80	7081.90	-1855.25	-2093.96	-82.16	672.52	298.54	2.26	PASS			
10025.00†	7173.17	-1192.99	-2240.14	10494.88	7081.46	-1863.05	-2187.56	-82.21	678.36	298.76	2.27	PASS			
10125.00†	7172.88	-1195.38	-2340.11	10351.21	7080.50	-1869.02	-2331.06	-82.20	680.00	298.58	2.30	PASS			
10225.00†	7172.59	-1197.77	-2440.08	10263.39	7080.51	-1870.43	-2418.86	-82.21	679.26	297.28	2.29	PASS			
10325.00†	7172.30	-1200.16	-2540.05	10192.28	7080.65	-1874.28	-2489.86	-82.26	682.17	298.66	2.29	PASS			
10425.00†	7172.01	-1202.55	-2640.03	10114.05	7081.40	-1881.43	-2567.76	-82.40	688.70	299.49	2.30	PASS			
10525.00†	7171.72	-1204.94	-2740.00	10002.85	7083.30	-1892.51	-2678.38	-82.68	695.96	299.48	2.33	PASS			
10625.00†	7171.42	-1207.33	-2839.97	9896.38	7084.88	-1901.52	-2784.46	-82.90	701.76	299.55	2.35	PASS			
10725.00†	7171.13	-1209.72	-2939.94	9780.17	7086.17	-1910.17	-2900.35	-83.09	706.69	299.20	2.37	PASS			
10825.00†	7170.84	-1212.11	-3039.91	9679.43	7086.01	-1915.36	-3000.94	-83.12	709.42	299.34	2.37	PASS			
10925.00†	7170.55	-1214.51	-3139.88	9590.32	7084.14	-1920.71	-3089.87	-83.03	713.22	299.88	2.38	PASS			
11025.00†	7170.26	-1216.90	-3239.85	9498.82	7082.32	-1927.52	-3181.10	-82.95	718.45	300.31	2.40	PASS			
11125.00†	7169.97	-1219.29	-3339.82	9406.07	7080.49	-1935.40	-3273.49	-82.88	724.72	300.71	2.41	PASS			
11225.00†	7169.68	-1221.68	-3439.79	9298.93	7078.50	-1944.68	-3380.21	-82.82	731.16	300.73	2.43	PASS			
11325.00†	7169.38	-1224.07	-3539.76	9173.66	7075.84	-1952.23	-3505.22	-82.68	734.95	300.01	2.45	PASS			
11425.00†	7169.09	-1226.46	-3639.74	9008.06	7072.40	-1963.50	-3670.71	-82.43	734.10	296.29	2.48	PASS			
11525.00†	7168.80	-1228.85	-3739.71	8876.43	7069.28	-1943.18	-3801.89	-82.07	723.91	293.79	2.47	PASS			
11625.00†	7168.51	-1231.24	-3839.68	8782.16	7067.40	-1934.99	-3895.79	-81.82	713.19	294.55	2.42	PASS			
11725.00†	7168.22	-1233.63	-3939.65	8696.39	7065.58	-1928.70	-3981.30	-81.60	703.84	296.10	2.38	PASS			
11825.00†	7167.93	-1236.02	-4039.62	8608.61	7063.46	-1923.92	-4068.93	-81.36	696.40	297.46	2.34	PASS			
11925.00†	7167.64	-1238.41	-4139.59	8511.06	7061.28	-1919.71	-4166.36	-81.13	690.07	298.11	2.32	PASS			
12025.00†	7167.34	-1240.81	-4239.56	8415.73	7059.26	-1915.94	-4261.59	-80.90	684.09	299.02	2.29	PASS			
12125.00†	7167.05	-1243.20	-4339.53	8326.78	7058.67	-1913.66	-4350.51	-80.82	679.26	300.57	2.26	PASS			
12225.00†	7166.76	-1245.59	-4439.50	8234.41	7059.18	-1912.76	-4442.87	-80.84	675.80	302.05	2.24	PASS			
12325.00†	7166.47	-1247.98	-4539.47	8124.82	7059.83	-1912.25	-4552.46	-80.88	672.91	302.57	2.23	PASS			
12425.00†	7166.18	-1250.37	-4639.45	7945.65	7061.05	-1896.51	-4730.79	-80.75	660.98	297.05	2.23	PASS			
12525.00†	7165.89	-1252.76	-4739.42	7864.17	7061.73	-1886.25	-4811.61	-80.66	646.04	300.43	2.15	PASS			
12625.00†	7165.60	-1255.15	-4839.39	7786.12	7062.51	-1878.85	-4889.30	-80.61	634.13	304.17	2.09	PASS			
12725.00†	7165.30	-1257.54	-4939.36	7702.87	7063.28	-1873.43	-4972.38	-80.59	625.15	307.45	2.04	PASS			
12825.00†	7165.01	-1259.93	-5039.33	7633.37	7061.03	-1870.98	-5041.76	-80.34	619.83	311.23	1.99	PASS			
12878.81†	7164.86	-1261.22	-5093.12	7596.56	7057.27	-1870.70	-5078.37	-79.99	619.08	312.85	1.98	PASS			
12925.00†	7164.72	-1262.32	-5139.30	7566.24	7052.56	-1870.98	-5108.33	-79.56	619.68	313.98	1.98	PASS			

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 115 of 202

**BAKER
HUGHES**
a GE company



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: HOOD 25N-22C-M AWB Offset Wellpath: HOOD 25N-22C-M AWP

Facility: SEC.20-T06N-R66W Slot: SLOT#01 HOOD 25N-22C-M (765'FSL & 1122'FEL SEC.20) Well: HOOD 25N-22C-M Threshold Value=1.00 † = interpolated/extrapolated station												
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status
12943.09†	7164.67	-1262.76	-5157.39	7554.39	7050.31	-1871.21	-5119.95	-79.36	620.24	314.34	1.98	PASS
13025.00†	7164.43	-1264.71	-5239.27	7502.29	7037.67	-1873.07	-5170.44	-78.24	625.22	315.34	1.98	PASS
13125.00†	7164.14	-1267.10	-5339.24	7442.52	7018.21	-1877.03	-5226.80	-76.57	637.13	315.03	2.02	PASS
13225.00†	7163.85	-1269.50	-5439.21	7389.02	6996.57	-1882.35	-5275.41	-74.78	656.05	315.07	2.08	PASS
13325.00†	7163.56	-1271.89	-5539.18	7340.43	6973.57	-1888.84	-5317.71	-72.97	682.48	308.76	2.21	PASS
13425.00†	7163.26	-1274.28	-5639.16	7291.34	6947.10	-1896.53	-5358.31	-70.97	716.10	302.81	2.37	PASS
13525.00†	7162.97	-1276.67	-5739.13	7248.14	6921.13	-1903.85	-5392.04	-69.08	756.52	295.35	2.57	PASS
13625.00†	7162.68	-1279.06	-5839.10	7218.59	6902.04	-1909.58	-5413.85	-67.77	803.94	286.63	2.81	PASS
13725.00†	7162.39	-1281.45	-5939.07	7191.88	6883.98	-1915.62	-5432.56	-66.58	858.04	277.38	3.10	PASS
13825.00†	7162.10	-1283.84	-6039.04	7167.78	6867.05	-1921.78	-5448.58	-65.53	917.96	268.00	3.43	PASS
13925.00†	7161.81	-1286.23	-6139.01	7142.81	6849.00	-1928.78	-5464.33	-64.46	982.81	259.13	3.80	PASS

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: HOOD 25N-22C-M AWB Offset Wellpath: HOOD 25N-22C-M AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: HOOD 25N-22C-M AWB Offset Wellpath: HOOD 25N-22C-M AWP

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
13.5in Open Hole	25.00	1763.00	1738.00	42.00	1743.62	-2244.56	-3758.61	-2165.66	-3730.80
9.625in Casing Surface	25.00	1763.00	1738.00	42.00	1743.62	-2244.56	-3758.61	-2165.66	-3730.80
8.5in Open Hole	1763.00	15526.00	13763.00	1743.62	7107.81	-2165.66	-3730.80	-1676.19	-1013.85

WELLPATH COMPOSITION - Offset Wellbore: HOOD 25N-22C-M AWB Offset Wellpath: HOOD 25N-22C-M AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
25.00	1712.00	Custom BHI NaviTrak (Standard Rotating+Axial Corr) (Rockies 0.03Gt model)	BHI NAVITRAK 13.5" (STD ROTATING, AXIAL, ROCKIES GT)<109-1712>	HOOD 25N-22C-M AWB
1712.00	15526.00	Custom BHI AutoTrak Curve (IFR1, Short) (Rockies 0.03Gt model)	BHI ATC 8.5" (IFR, SHORT, ROCKIES GT)<1794-15526>	HOOD 25N-22C-M AWB
15526.00	15550.00	Blind Drilling (std)	Projection to bit	HOOD 25N-22C-M AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: HOOD 25N-22C-M AWB Offset Wellpath: HOOD 25N-22C-M AWP

MD Reference: PRECISION 562 (25') (RKB)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	25.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 116 of 202

**BAKER
HUGHES**
a GE company



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. POPE 19-1G6 AWB Offset Wellpath: EX. POPE 19-1G6 AWP

Facility: SEC.19-T06N-R66W Slot: SLOT#02 EX. POPE 19-1G6 (661'FNL & 538'FEL, PR, CODL) Well: EX. POPE 19-1G6 Threshold Value=1.00 † = interpolated/extrapolated station												
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status
25.00	25.00	0.00	0.00	40.00	25.00	68.33	-10856.09	-89.64	10856.30	50.25	220.25	PASS

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: EX. POPE 19-1G6 AWB Offset Wellpath: EX. POPE 19-1G6 AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

WELLPATH COMPOSITION - Offset Wellbore: EX. POPE 19-1G6 AWB Offset Wellpath: EX. POPE 19-1G6 AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
0.00	7294.00	Drift Indicator - Inclination Only (Actual Survey)	ASSUMED VERTICAL TO TD FROM COGCC <7294>	EX. POPE 19-1G6 AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: EX. POPE 19-1G6 AWB Offset Wellpath: EX. POPE 19-1G6 AWP

MD Reference: Rig on SLOT#02 EX. POPE 19-1G6 (661'FNL & 538'FEL, PR, CODL) (RT)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	0.00ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 117 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DONN 30N-20A-L PWB Offset Wellpath: DONN 30N-20A-L PWP (REV-B.0)

Facility: SEC.21-T06N-R66W Slot: SLOT#13 DONN 30N-20A-L (738'FNL & 250'FEL, SEC.21) Well: DONN 30N 20A-L Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	27.00	25.00	200.01	1.39	0.40	200.01	1.57	329.93	PASS	
125.00†	125.00	0.00	0.00	127.00	125.00	200.01	1.39	0.40	200.01	1.89	214.13	PASS	
225.00†	225.00	0.00	0.00	225.85	223.85	200.08	1.48	0.42	200.09	2.46	133.31	PASS	
300.00	300.00	0.00	0.00	297.60	295.58	201.06	2.68	0.76	201.13	3.01	97.73	PASS	
325.00†	325.00	-0.09	0.06	321.50	319.46	201.64	3.38	-142.84	201.83	3.20	89.76	PASS	
425.00†	424.96	-2.20	1.61	416.84	414.63	205.21	7.73	-142.00	207.76	4.35	61.04	PASS	
525.00†	524.77	-7.13	5.22	511.52	508.91	210.74	14.48	-141.07	218.64	5.67	46.30	PASS	
625.00†	624.30	-14.86	10.88	605.23	601.88	218.15	23.52	-140.11	234.43	6.78	40.16	PASS	
725.00†	723.44	-25.39	18.59	699.32	694.82	227.43	34.85	-139.18	254.96	7.71	37.67	PASS	
825.00†	822.07	-38.71	28.34	796.48	790.67	237.49	47.12	-138.64	278.61	8.52	36.76	PASS	
895.18	890.91	-49.71	36.39	864.27	857.55	244.51	55.68	-138.53	296.73	9.06	36.53	PASS	
925.00†	920.09	-54.67	40.02	893.00	885.90	247.49	59.31	-138.64	304.70	9.26	36.60	PASS	
1025.00†	1017.94	-71.32	52.20	989.35	980.96	257.47	71.48	-138.94	331.42	9.91	36.95	PASS	
1125.00†	1115.79	-87.96	64.39	1085.70	1076.02	267.44	83.65	-139.21	358.14	9.88	40.07	PASS	
1225.00†	1213.64	-104.60	76.57	1182.06	1171.07	277.42	95.82	-139.43	384.87	11.35	36.95	PASS	
1325.00†	1311.48	-121.25	88.76	1278.41	1266.13	287.40	108.00	-139.63	411.60	12.03	37.12	PASS	
1425.00†	1409.33	-137.89	100.94	1374.76	1361.19	297.37	120.17	-139.80	438.34	12.78	37.03	PASS	
1525.00†	1507.18	-154.53	113.12	1471.11	1456.24	307.35	132.34	-139.96	465.08	13.54	36.91	PASS	
1625.00†	1605.03	-171.18	125.31	1567.46	1551.30	317.33	144.51	-140.09	491.83	14.32	36.76	PASS	
1725.00†	1702.88	-187.82	137.49	1663.81	1646.36	327.31	156.68	-140.21	518.58	15.10	36.60	PASS	
1825.00†	1800.73	-204.47	149.67	1760.16	1741.42	337.28	168.85	-140.32	545.32	15.44	36.96	PASS	
1925.00†	1898.58	-221.11	161.86	1856.51	1836.47	347.26	181.02	-140.42	572.08	15.71	38.08	PASS	
2025.00†	1996.43	-237.75	174.04	1952.86	1931.53	357.24	193.19	-140.51	598.83	15.90	39.36	PASS	
2125.00†	2094.28	-254.40	186.22	2049.22	2026.59	367.22	205.36	-140.60	625.58	16.17	40.41	PASS	
2225.00†	2192.13	-271.04	198.41	2145.57	2121.64	377.19	217.54	-140.68	652.33	16.51	41.24	PASS	
2325.00†	2289.98	-287.68	210.59	2241.92	2216.70	387.17	229.71	-140.75	679.09	16.91	41.86	PASS	
2425.00†	2387.83	-304.33	222.77	2338.27	2311.76	397.15	241.88	-140.81	705.85	17.38	42.29	PASS	
2525.00†	2485.68	-320.97	234.96	2434.62	2406.82	407.12	254.05	-140.87	732.60	17.91	42.56	PASS	
2625.00†	2583.53	-337.62	247.14	2530.97	2501.87	417.10	266.22	-140.93	759.36	18.48	42.68	PASS	
2725.00†	2681.38	-354.26	259.33	2627.32	2596.93	427.08	278.39	-140.98	786.12	19.11	42.69	PASS	
2825.00†	2779.23	-370.90	271.51	2723.67	2691.99	437.06	290.56	-141.03	812.88	19.77	42.60	PASS	
2925.00†	2877.08	-387.55	283.69	2820.02	2787.04	447.03	302.73	-141.07	839.64	20.48	42.43	PASS	
3025.00†	2974.93	-404.19	295.88	2916.37	2882.10	457.01	314.90	-141.12	866.40	21.22	42.20	PASS	
3125.00†	3072.78	-420.83	308.06	3012.73	2977.16	466.99	327.08	-141.16	893.16	21.99	41.93	PASS	
3225.00†	3170.63	-437.48	320.24	3109.08	3072.21	476.96	339.25	-141.19	919.92	22.79	41.62	PASS	
3325.00†	3268.48	-454.12	332.43	3205.43	3167.27	486.94	351.42	-141.23	946.68	23.62	41.30	PASS	
3425.00†	3366.33	-470.77	344.61	3301.78	3262.33	496.92	363.59	-141.26	973.44	24.46	40.95	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: DONN 30N-20A-L PWB Offset Wellpath: DONN 30N-20A-L PWP (REV-B.0)

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 118 of 202



REFERENCE WELLPATH IDENTIFICATION			
Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

HOLE & CASING SECTIONS - Offset Wellbore: DONN 30N-20A-L PWB Offset Wellpath: DONN 30N-20A-L PWP (REV-B.0)									
String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
13.5in Open Hole	25.00	1750.00	1725.00	23.00	1731.39	121.93	0.85	163.45	51.50
9.625in Casing Surface	25.00	1750.00	1725.00	23.00	1731.39	121.93	0.85	163.45	51.50
8.5in Open Hole	1750.00	17652.35	15902.35	1731.39	6853.00	163.45	51.50	250.16	-3107.65

SURVEY PROGRAM - Offset Wellbore: DONN 30N-20A-L PWB Offset Wellpath: DONN 30N-20A-L PWP (REV-B.0)				
Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
25.00	1750.00	Custom BHI NaviTrak (Standard Rotating+Axial Corr) (Rockies 0.03Gt model)		DONN 30N-20A-L PWB
1750.00	17652.35	Custom BHI AutoTrak Curve (IFR1, Short) (Rockies 0.03Gt model)		DONN 30N-20A-L PWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: DONN 30N-20A-L PWB Offset Wellpath: DONN 30N-20A-L PWP (REV-B.0)	
MD Reference: PRECISION DRILLING (25') (RKB)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	25.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 119 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. HALL 1AWB Offset Wellpath: EX. HALL 1AWP

Facility: SEC.19-T06N-R66W Slot: SLOT#01 EX. HALL 1 (2062'FNL & 660'FEL, PR, CIDL) Well: EX. HALL 1 Threshold Value=1.00 † = interpolated/extrapolated station														
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status		
25.00	25.00	0.00	0.00	-14.00	25.00	-1306.53	-11027.24	-96.76	11104.37	25.57	451.32	PASS		
125.00†	125.00	0.00	0.00	86.00	125.00	-1306.53	-11027.24	-96.76	11104.37	50.35	224.84	PASS		
225.00†	225.00	0.00	0.00	186.00	225.00	-1306.53	-11027.24	-96.76	11104.37	51.19	221.08	PASS		
300.00	300.00	0.00	0.00	261.00	300.00	-1306.53	-11027.24	-96.76	11104.37	52.33	216.15	PASS		
325.00†	325.00	-0.09	0.06	286.00	325.00	-1306.53	-11027.24	119.45	11104.42	52.75	214.42	PASS		
425.00†	424.96	-2.20	1.61	385.96	424.96	-1306.53	-11027.24	119.44	11105.71	54.93	205.78	PASS		
525.00†	524.77	-7.13	5.22	485.77	524.77	-1306.53	-11027.24	119.41	11108.71	57.61	196.10	PASS		
625.00†	624.30	-14.86	10.88	585.30	624.30	-1306.53	-11027.24	119.37	11113.43	60.66	186.14	PASS		
725.00†	723.44	-25.39	18.59	684.44	723.44	-1306.53	-11027.24	119.32	11119.87	63.99	176.40	PASS		
825.00†	822.07	-38.71	28.34	783.07	822.07	-1306.53	-11027.24	119.25	11128.03	67.53	167.15	PASS		
895.18	890.91	-49.71	36.39	851.91	890.91	-1306.53	-11027.24	119.19	11134.78	70.11	161.02	PASS		
925.00†	920.09	-54.67	40.02	881.09	920.09	-1306.53	-11027.24	119.22	11137.83	71.21	158.53	PASS		
1025.00†	1017.94	-71.32	52.20	978.94	1017.94	-1306.53	-11027.24	119.31	11148.08	75.01	150.54	PASS		
1125.00†	1115.79	-87.96	64.39	1076.79	1115.79	-1306.53	-11027.24	119.40	11158.36	78.92	143.13	PASS		
1225.00†	1213.64	-104.60	76.57	1174.64	1213.64	-1306.53	-11027.24	119.49	11168.67	82.90	136.29	PASS		
1325.00†	1311.48	-121.25	88.76	1272.48	1311.48	-1306.53	-11027.24	119.58	11179.01	86.96	129.98	PASS		
1425.00†	1409.33	-137.89	100.94	1370.33	1409.33	-1306.53	-11027.24	119.67	11189.37	91.08	124.15	PASS		
1525.00†	1507.18	-154.53	113.12	1468.18	1507.18	-1306.53	-11027.24	119.76	11199.76	95.25	118.78	PASS		
1625.00†	1605.03	-171.18	125.31	1566.03	1605.03	-1306.53	-11027.24	119.85	11210.18	99.46	113.81	PASS		
1725.00†	1702.88	-187.82	137.49	1663.88	1702.88	-1306.53	-11027.24	119.94	11220.63	103.70	109.21	PASS		
1825.00†	1800.73	-204.47	149.67	1761.73	1800.73	-1306.53	-11027.24	120.03	11231.11	107.68	104.98	PASS		
1925.00†	1898.58	-221.11	161.86	1859.58	1898.58	-1306.53	-11027.24	120.12	11241.62	111.92	101.08	PASS		
2025.00†	1996.43	-237.75	174.04	1957.43	1996.43	-1306.53	-11027.24	120.21	11252.15	116.19	97.43	PASS		
2125.00†	2094.28	-254.40	186.22	2055.28	2094.28	-1306.53	-11027.24	120.30	11262.71	120.49	94.02	PASS		
2225.00†	2192.13	-271.04	198.41	2153.13	2192.13	-1306.53	-11027.24	120.39	11273.30	124.82	90.83	PASS		
2325.00†	2289.98	-287.68	210.59	2250.98	2289.98	-1306.53	-11027.24	120.48	11283.92	129.17	87.83	PASS		
2425.00†	2387.83	-304.33	222.77	2348.83	2387.83	-1306.53	-11027.24	120.57	11294.56	133.54	85.02	PASS		
2525.00†	2485.68	-320.97	234.96	2446.68	2485.68	-1306.53	-11027.24	120.66	11305.24	137.94	82.37	PASS		
2625.00†	2583.53	-337.62	247.14	2544.53	2583.53	-1306.53	-11027.24	120.74	11315.94	142.36	79.88	PASS		
2725.00†	2681.38	-354.26	259.33	2642.38	2681.38	-1306.53	-11027.24	120.83	11326.66	146.80	77.53	PASS		
2825.00†	2779.23	-370.90	271.51	2740.23	2779.23	-1306.53	-11027.24	120.92	11337.42	151.26	75.30	PASS		
2925.00†	2877.08	-387.55	283.69	2838.08	2877.08	-1306.53	-11027.24	121.01	11348.20	155.74	73.20	PASS		
3025.00†	2974.93	-404.19	295.88	2935.93	2974.93	-1306.53	-11027.24	121.10	11359.01	160.23	71.20	PASS		
3125.00†	3072.78	-420.83	308.06	3033.78	3072.78	-1306.53	-11027.24	121.18	11369.85	164.74	69.31	PASS		
3225.00†	3170.63	-437.48	320.24	3131.63	3170.63	-1306.53	-11027.24	121.27	11380.71	169.27	67.51	PASS		
3325.00†	3268.48	-454.12	332.43	3229.48	3268.48	-1306.53	-11027.24	121.36	11391.60	173.81	65.80	PASS		
3425.00†	3366.33	-470.77	344.61	3327.33	3366.33	-1306.53	-11027.24	121.45	11402.52	178.37	64.18	PASS		
3525.00†	3464.18	-487.41	356.79	3425.18	3464.18	-1306.53	-11027.24	121.53	11413.46	182.94	62.63	PASS		
3625.00†	3562.03	-504.05	368.98	3523.03	3562.03	-1306.53	-11027.24	121.62	11424.43	187.53	61.15	PASS		
3725.00†	3659.88	-520.70	381.16	3620.88	3659.88	-1306.53	-11027.24	121.71	11435.43	192.12	59.74	PASS		
3825.00†	3757.73	-537.34	393.34	3718.73	3757.73	-1306.53	-11027.24	121.79	11446.46	196.73	58.39	PASS		
3925.00†	3855.57	-553.98	405.53	3816.57	3855.57	-1306.53	-11027.24	121.88	11457.51	201.36	57.10	PASS		
4025.00†	3953.42	-570.63	417.71	3914.42	3953.42	-1306.53	-11027.24	121.96	11468.58	205.99	55.86	PASS		
4125.00†	4051.27	-587.27	429.90	4012.27	4051.27	-1306.53	-11027.24	122.05	11479.69	210.64	54.68	PASS		
4225.00†	4149.12	-603.92	442.08	4110.12	4149.12	-1306.53	-11027.24	122.14	11490.82	215.29	53.55	PASS		

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 120 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. HALL 1AWB Offset Wellpath: EX. HALL 1AWP

Facility: SEC.19-T06N-R66W Slot: SLOT#01 EX. HALL 1 (2062'FNL & 660'FEL, PR, CODL) Well: EX. HALL 1 Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
4325.00†	4246.97	-620.56	454.26	4207.97	4246.97	-1306.53	-11027.24	122.22	11501.97	219.96	52.46	PASS	
4425.00†	4344.82	-637.20	466.45	4305.82	4344.82	-1306.53	-11027.24	122.31	11513.16	224.63	51.41	PASS	
4525.00†	4442.67	-653.85	478.63	4403.67	4442.67	-1306.53	-11027.24	122.39	11524.36	229.32	50.41	PASS	
4625.00†	4540.52	-670.49	490.81	4501.52	4540.52	-1306.53	-11027.24	122.48	11535.60	234.01	49.44	PASS	
4725.00†	4638.37	-687.13	503.00	4599.37	4638.37	-1306.53	-11027.24	122.56	11546.86	238.72	48.51	PASS	
4825.00†	4736.22	-703.78	515.18	4697.22	4736.22	-1306.53	-11027.24	122.65	11558.14	243.43	47.62	PASS	
4925.00†	4834.07	-720.42	527.36	4795.07	4834.07	-1306.53	-11027.24	122.73	11569.46	248.15	46.75	PASS	
5025.00†	4931.92	-737.07	539.55	4892.92	4931.92	-1306.53	-11027.24	122.82	11580.79	252.88	45.92	PASS	
5125.00†	5029.77	-753.71	551.73	4990.77	5029.77	-1306.53	-11027.24	122.90	11592.16	257.61	45.12	PASS	
5225.00†	5127.62	-770.35	563.91	5088.62	5127.62	-1306.53	-11027.24	122.99	11603.55	262.36	44.35	PASS	
5325.00†	5225.47	-787.00	576.10	5186.47	5225.47	-1306.53	-11027.24	123.07	11614.96	267.11	43.60	PASS	
5425.00†	5323.32	-803.64	588.28	5284.32	5323.32	-1306.53	-11027.24	123.15	11626.40	271.86	42.87	PASS	
5525.00†	5421.17	-820.28	600.47	5382.17	5421.17	-1306.53	-11027.24	123.24	11637.86	276.63	42.18	PASS	
5625.00†	5519.02	-836.93	612.65	5480.02	5519.02	-1306.53	-11027.24	123.32	11649.35	281.40	41.50	PASS	
5725.00†	5616.87	-853.57	624.83	5577.87	5616.87	-1306.53	-11027.24	123.40	11660.87	286.17	40.85	PASS	
5825.00†	5714.72	-870.22	637.02	5675.72	5714.72	-1306.53	-11027.24	123.49	11672.41	290.96	40.21	PASS	
5925.00†	5812.57	-886.86	649.20	5773.57	5812.57	-1306.53	-11027.24	123.57	11683.98	295.74	39.60	PASS	
6025.00†	5910.42	-903.50	661.38	5871.42	5910.42	-1306.53	-11027.24	123.65	11695.57	300.54	39.01	PASS	
6125.00†	6008.27	-920.15	673.57	5969.27	6008.27	-1306.53	-11027.24	123.74	11707.18	305.33	38.43	PASS	
6225.00†	6106.12	-936.79	685.75	6067.12	6106.12	-1306.53	-11027.24	123.82	11718.82	310.14	37.87	PASS	
6325.00†	6203.97	-953.43	697.93	6164.97	6203.97	-1306.53	-11027.24	123.90	11730.49	314.95	37.33	PASS	
6425.00†	6301.82	-970.08	710.12	6262.82	6301.82	-1306.53	-11027.24	123.98	11742.18	319.76	36.80	PASS	
6525.00†	6399.66	-986.72	722.30	6360.66	6399.66	-1306.53	-11027.24	124.07	11753.89	324.58	36.29	PASS	
6605.93	6478.85	-1000.19	732.16	6439.85	6478.85	-1306.53	-11027.24	124.13	11763.39	328.48	35.89	PASS	
6625.00†	6497.54	-1003.38	734.20	6458.54	6497.54	-1306.53	-11027.24	116.86	11765.34	329.40	35.79	PASS	
6725.00†	6595.97	-1020.39	735.57	6556.97	6595.97	-1306.53	-11027.24	68.28	11766.28	334.38	35.26	PASS	
6825.00†	6693.34	-1037.59	721.30	6654.34	6693.34	-1306.53	-11027.24	37.76	11751.61	339.77	34.66	PASS	
6925.00†	6787.24	-1054.57	691.74	6748.24	6787.24	-1306.53	-11027.24	25.02	11721.68	345.04	34.04	PASS	
7025.00†	6875.37	-1070.91	647.62	6836.37	6875.37	-1306.53	-11027.24	18.88	11677.23	349.83	33.45	PASS	
7125.00†	6955.55	-1086.20	590.03	6916.55	6955.55	-1306.53	-11027.24	15.49	11619.35	354.08	32.88	PASS	
7225.00†	7025.81	-1100.06	520.38	6986.81	7025.81	-1306.53	-11027.24	13.49	11549.47	357.71	32.35	PASS	
7325.00†	7084.42	-1112.16	440.40	7045.42	7084.42	-1306.53	-11027.24	12.33	11469.28	360.67	31.86	PASS	
7425.00†	7129.94	-1122.20	352.04	7090.94	7129.94	-1306.53	-11027.24	11.83	11380.77	362.92	31.42	PASS	
7525.00†	7161.25	-1129.93	257.49	7122.25	7161.25	-1306.53	-11027.24	12.14	11286.11	364.43	31.03	PASS	
7625.00†	7177.57	-1135.16	159.08	7138.57	7177.57	-1306.53	-11027.24	15.58	11187.63	365.20	30.69	PASS	
7682.94	7180.00	-1136.99	101.24	7141.00	7180.00	-1306.53	-11027.24	108.57	11129.77	365.31	30.52	PASS	
7725.00†	7179.88	-1138.00	59.19	7140.88	7179.88	-1306.53	-11027.24	108.50	11087.71	365.31	30.41	PASS	
7825.00†	7179.59	-1140.39	-40.78	7140.59	7179.59	-1306.53	-11027.24	108.34	10987.71	365.29	30.14	PASS	
7925.00†	7179.29	-1142.78	-140.75	7140.29	7179.29	-1306.53	-11027.24	108.19	10887.72	365.29	29.86	PASS	
8025.00†	7179.00	-1145.17	-240.72	7140.00	7179.00	-1306.53	-11027.24	108.03	10787.72	365.28	29.59	PASS	
8125.00†	7178.71	-1147.56	-340.69	7139.71	7178.71	-1306.53	-11027.24	107.88	10687.73	365.27	29.31	PASS	
8225.00†	7178.42	-1149.95	-440.66	7139.42	7178.42	-1306.53	-11027.24	107.72	10587.73	365.26	29.04	PASS	
8325.00†	7178.13	-1152.34	-540.63	7139.13	7178.13	-1306.53	-11027.24	107.56	10487.74	365.26	28.77	PASS	
8425.00†	7177.84	-1154.73	-640.61	7138.84	7177.84	-1306.53	-11027.24	107.41	10387.74	365.26	28.49	PASS	
8525.00†	7177.55	-1157.12	-740.58	7138.55	7177.55	-1306.53	-11027.24	107.25	10287.75	365.26	28.22	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 121 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. HALL 1AWB Offset Wellpath: EX. HALL 1AWP

Facility: SEC.19-T06N-R66W Slot: SLOT#01 EX. HALL 1 (2062'FNL & 660'FEL, PR, CODL) Well: EX. HALL 1 Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
8625.00†	7177.25	-1159.52	-840.55	7138.25	7177.25	-1306.53	-11027.24	107.09	10187.75	365.26	27.94	PASS	
8725.00†	7176.96	-1161.91	-940.52	7137.96	7176.96	-1306.53	-11027.24	106.93	10087.75	365.26	27.67	PASS	
8825.00†	7176.67	-1164.30	-1040.49	7137.67	7176.67	-1306.53	-11027.24	106.77	9987.76	365.26	27.40	PASS	
8925.00†	7176.38	-1166.69	-1140.46	7137.38	7176.38	-1306.53	-11027.24	106.61	9887.77	365.26	27.12	PASS	
9025.00†	7176.09	-1169.08	-1240.43	7137.09	7176.09	-1306.53	-11027.24	106.46	9787.77	365.27	26.85	PASS	
9125.00†	7175.80	-1171.47	-1340.40	7136.80	7175.80	-1306.53	-11027.24	106.30	9687.78	365.27	26.57	PASS	
9225.00†	7175.51	-1173.86	-1440.37	7136.51	7175.51	-1306.53	-11027.24	106.14	9587.78	365.28	26.30	PASS	
9325.00†	7175.21	-1176.25	-1540.34	7136.21	7175.21	-1306.53	-11027.24	105.98	9487.79	365.29	26.02	PASS	
9425.00†	7174.92	-1178.64	-1640.32	7135.92	7174.92	-1306.53	-11027.24	105.82	9387.79	365.30	25.75	PASS	
9525.00†	7174.63	-1181.03	-1740.29	7135.63	7174.63	-1306.53	-11027.24	105.66	9287.80	365.31	25.47	PASS	
9625.00†	7174.34	-1183.42	-1840.26	7135.34	7174.34	-1306.53	-11027.24	105.50	9187.80	365.33	25.20	PASS	
9725.00†	7174.05	-1185.82	-1940.23	7135.05	7174.05	-1306.53	-11027.24	105.34	9087.81	365.34	24.92	PASS	
9825.00†	7173.76	-1188.21	-2040.20	7134.76	7173.76	-1306.53	-11027.24	105.18	8987.82	365.36	24.65	PASS	
9925.00†	7173.47	-1190.60	-2140.17	7134.47	7173.47	-1306.53	-11027.24	105.01	8887.82	365.37	24.37	PASS	
10025.00†	7173.17	-1192.99	-2240.14	7134.17	7173.17	-1306.53	-11027.24	104.85	8787.83	365.39	24.10	PASS	
10125.00†	7172.88	-1195.38	-2340.11	7133.88	7172.88	-1306.53	-11027.24	104.69	8687.84	365.41	23.82	PASS	
10225.00†	7172.59	-1197.77	-2440.08	7133.59	7172.59	-1306.53	-11027.24	104.53	8587.84	365.43	23.54	PASS	
10325.00†	7172.30	-1200.16	-2540.05	7133.30	7172.30	-1306.53	-11027.24	104.37	8487.85	365.46	23.27	PASS	
10425.00†	7172.01	-1202.55	-2640.03	7133.01	7172.01	-1306.53	-11027.24	104.20	8387.86	365.48	22.99	PASS	
10525.00†	7171.72	-1204.94	-2740.00	7132.72	7171.72	-1306.53	-11027.24	104.04	8287.86	365.51	22.72	PASS	
10625.00†	7171.42	-1207.33	-2839.97	7132.42	7171.42	-1306.53	-11027.24	103.88	8187.87	365.53	22.44	PASS	
10725.00†	7171.13	-1209.72	-2939.94	7132.13	7171.13	-1306.53	-11027.24	103.72	8087.88	365.56	22.17	PASS	
10825.00†	7170.84	-1212.11	-3039.91	7131.84	7170.84	-1306.53	-11027.24	103.55	7987.89	365.59	21.89	PASS	
10925.00†	7170.55	-1214.51	-3139.88	7131.55	7170.55	-1306.53	-11027.24	103.39	7887.89	365.62	21.61	PASS	
11025.00†	7170.26	-1216.90	-3239.85	7131.26	7170.26	-1306.53	-11027.24	103.23	7787.90	365.65	21.34	PASS	
11125.00†	7169.97	-1219.29	-3339.82	7130.97	7169.97	-1306.53	-11027.24	103.06	7687.91	365.69	21.06	PASS	
11225.00†	7169.68	-1221.68	-3439.79	7130.68	7169.68	-1306.53	-11027.24	102.90	7587.92	365.72	20.79	PASS	
11325.00†	7169.38	-1224.07	-3539.76	7130.38	7169.38	-1306.53	-11027.24	102.73	7487.93	365.76	20.51	PASS	
11425.00†	7169.09	-1226.46	-3639.74	7130.09	7169.09	-1306.53	-11027.24	102.57	7387.94	365.80	20.23	PASS	
11525.00†	7168.80	-1228.85	-3739.71	7129.80	7168.80	-1306.53	-11027.24	102.40	7287.94	365.84	19.96	PASS	
11625.00†	7168.51	-1231.24	-3839.68	7129.51	7168.51	-1306.53	-11027.24	102.24	7187.95	365.88	19.68	PASS	
11725.00†	7168.22	-1233.63	-3939.65	7129.22	7168.22	-1306.53	-11027.24	102.07	7087.96	365.92	19.41	PASS	
11825.00†	7167.93	-1236.02	-4039.62	7128.93	7167.93	-1306.53	-11027.24	101.91	6987.97	365.97	19.13	PASS	
11925.00†	7167.64	-1238.41	-4139.59	7128.64	7167.64	-1306.53	-11027.24	101.74	6887.98	366.01	18.85	PASS	
12025.00†	7167.34	-1240.81	-4239.56	7128.34	7167.34	-1306.53	-11027.24	101.58	6787.99	366.06	18.58	PASS	
12125.00†	7167.05	-1243.20	-4339.53	7128.05	7167.05	-1306.53	-11027.24	101.41	6688.00	366.11	18.30	PASS	
12225.00†	7166.76	-1245.59	-4439.50	7127.76	7166.76	-1306.53	-11027.24	101.24	6588.02	366.16	18.03	PASS	
12325.00†	7166.47	-1247.98	-4539.47	7127.47	7166.47	-1306.53	-11027.24	101.08	6488.03	366.21	17.75	PASS	
12425.00†	7166.18	-1250.37	-4639.45	7127.18	7166.18	-1306.53	-11027.24	100.91	6388.04	366.27	17.47	PASS	
12525.00†	7165.89	-1252.76	-4739.42	7126.89	7165.89	-1306.53	-11027.24	100.74	6288.05	366.33	17.20	PASS	
12625.00†	7165.60	-1255.15	-4839.39	7126.60	7165.60	-1306.53	-11027.24	100.58	6188.06	366.38	16.92	PASS	
12725.00†	7165.30	-1257.54	-4939.36	7126.30	7165.30	-1306.53	-11027.24	100.41	6088.08	366.44	16.64	PASS	
12825.00†	7165.01	-1259.93	-5039.33	7126.01	7165.01	-1306.53	-11027.24	100.24	5988.09	366.51	16.37	PASS	
12925.00†	7164.72	-1262.32	-5139.30	7125.72	7164.72	-1306.53	-11027.24	100.08	5888.10	366.57	16.09	PASS	
13025.00†	7164.43	-1264.71	-5239.27	7125.43	7164.43	-1306.53	-11027.24	99.91	5788.12	366.64	15.82	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 122 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. HALL 1AWB Offset Wellpath: EX. HALL 1AWP

Facility: SEC.19-T06N-R66W Slot: SLOT#01 EX. HALL 1 (2062'FNL & 660'FEL, PR, CODL) Well: EX. HALL 1 Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
13125.00†	7164.14	-1267.10	-5339.24	7125.14	7164.14	-1306.53	-11027.24	99.74	5688.13	366.70	15.54	PASS	
13225.00†	7163.85	-1269.50	-5439.21	7124.85	7163.85	-1306.53	-11027.24	99.57	5588.15	366.78	15.26	PASS	
13325.00†	7163.56	-1271.89	-5539.18	7124.56	7163.56	-1306.53	-11027.24	99.40	5488.16	366.85	14.99	PASS	
13425.00†	7163.26	-1274.28	-5639.16	7124.26	7163.26	-1306.53	-11027.24	99.23	5388.18	366.92	14.71	PASS	
13525.00†	7162.97	-1276.67	-5739.13	7123.97	7162.97	-1306.53	-11027.24	99.07	5288.19	367.00	14.44	PASS	
13625.00†	7162.68	-1279.06	-5839.10	7123.68	7162.68	-1306.53	-11027.24	98.90	5188.21	367.08	14.16	PASS	
13725.00†	7162.39	-1281.45	-5939.07	7123.39	7162.39	-1306.53	-11027.24	98.73	5088.23	367.16	13.88	PASS	
13825.00†	7162.10	-1283.84	-6039.04	7123.10	7162.10	-1306.53	-11027.24	98.56	4988.25	367.25	13.61	PASS	
13925.00†	7161.81	-1286.23	-6139.01	7122.81	7161.81	-1306.53	-11027.24	98.39	4888.27	367.34	13.33	PASS	
14025.00†	7161.51	-1288.62	-6238.98	7122.51	7161.51	-1306.53	-11027.24	98.22	4788.29	367.43	13.06	PASS	
14032.94	7161.49	-1288.81	-6246.92	7122.49	7161.49	-1306.53	-11027.24	98.21	4780.35	367.44	13.03	PASS	
14125.00†	7161.22	-1288.79	-6338.97	7122.22	7161.22	-1306.53	-11027.24	98.21	4688.30	367.49	12.78	PASS	
14211.94	7160.97	-1284.71	-6425.81	7121.97	7160.97	-1306.53	-11027.24	98.24	4601.48	367.47	12.54	PASS	
14225.00†	7160.93	-1283.79	-6438.83	7121.93	7160.93	-1306.53	-11027.24	98.23	4588.46	367.47	12.51	PASS	
14325.00†	7160.64	-1276.82	-6538.59	7121.64	7160.64	-1306.53	-11027.24	98.18	4488.75	367.42	12.24	PASS	
14411.94	7160.39	-1270.75	-6625.32	7121.39	7160.39	-1306.53	-11027.24	98.14	4402.06	367.40	12.00	PASS	
14425.00†	7160.35	-1269.89	-6638.35	7121.35	7160.35	-1306.53	-11027.24	98.34	4389.04	367.40	11.97	PASS	
14525.00†	7160.06	-1266.21	-6738.27	7121.06	7160.06	-1306.53	-11027.24	98.34	4289.16	367.42	11.69	PASS	
14625.00†	7159.76	-1267.77	-6838.25	7120.76	7159.76	-1306.53	-11027.24	95.17	4189.17	367.49	11.42	PASS	
14725.00†	7159.47	-1274.55	-6938.00	7120.47	7159.47	-1306.53	-11027.24	91.95	4089.36	367.63	11.14	PASS	
14825.00†	7159.17	-1286.55	-7037.27	7120.17	7159.17	-1306.53	-11027.24	91.18	3990.02	367.86	10.87	PASS	
14925.00†	7158.88	-1303.73	-7135.77	7119.88	7158.88	-1306.53	-11027.24	90.83	3891.47	368.28	10.59	PASS	
14937.60	7158.84	-1306.26	-7148.12	7119.84	7158.84	-1306.53	-11027.24	90.80	3879.12	368.35	10.55	PASS	
15025.00†	7158.59	-1324.09	-7233.68	7119.59	7158.59	-1306.53	-11027.24	90.78	3793.60	368.92	10.30	PASS	
15037.60	7158.55	-1326.66	-7246.02	7119.55	7158.55	-1306.53	-11027.24	90.78	3781.28	369.02	10.26	PASS	
15125.00†	7158.30	-1342.52	-7331.95	7119.30	7158.30	-1306.53	-11027.24	90.98	3695.46	369.69	10.01	PASS	
15225.00†	7158.01	-1355.83	-7431.05	7119.01	7158.01	-1306.53	-11027.24	91.37	3596.53	370.40	9.73	PASS	
15325.00†	7157.72	-1363.93	-7530.71	7118.72	7157.72	-1306.53	-11027.24	92.33	3497.00	370.95	9.44	PASS	
15417.62	7157.45	-1366.77	-7623.28	7118.45	7157.45	-1306.53	-11027.24	96.81	3404.49	371.25	9.19	PASS	
15425.00†	7157.43	-1366.82	-7630.66	7118.43	7157.43	-1306.53	-11027.24	96.80	3397.12	371.27	9.17	PASS	
15525.00†	7157.14	-1367.46	-7730.65	7118.14	7157.14	-1306.53	-11027.24	96.60	3297.15	371.48	8.89	PASS	
15625.00†	7156.85	-1368.11	-7830.65	7117.85	7156.85	-1306.53	-11027.24	96.40	3197.18	371.70	8.62	PASS	
15725.00†	7156.56	-1368.75	-7930.65	7117.56	7156.56	-1306.53	-11027.24	96.20	3097.21	371.94	8.34	PASS	
15825.00†	7156.27	-1369.40	-8030.65	7117.27	7156.27	-1306.53	-11027.24	96.00	2997.25	372.19	8.07	PASS	
15925.00†	7155.98	-1370.04	-8130.64	7116.98	7155.98	-1306.53	-11027.24	95.80	2897.29	372.45	7.79	PASS	
16025.00†	7155.70	-1370.69	-8230.64	7116.70	7155.70	-1306.53	-11027.24	95.60	2797.33	372.74	7.52	PASS	
16125.00†	7155.41	-1371.33	-8330.64	7116.41	7155.41	-1306.53	-11027.24	95.40	2697.38	373.05	7.24	PASS	
16225.00†	7155.12	-1371.98	-8430.64	7116.12	7155.12	-1306.53	-11027.24	95.21	2597.43	373.38	6.97	PASS	
16325.00†	7154.83	-1372.62	-8530.63	7115.83	7154.83	-1306.53	-11027.24	95.01	2497.48	373.74	6.69	PASS	
16425.00†	7154.54	-1373.27	-8630.63	7115.54	7154.54	-1306.53	-11027.24	94.81	2397.54	374.13	6.42	PASS	
16525.00†	7154.25	-1373.91	-8730.63	7115.25	7154.25	-1306.53	-11027.24	94.61	2297.60	374.56	6.14	PASS	
16625.00†	7153.97	-1374.56	-8830.63	7114.97	7153.97	-1306.53	-11027.24	94.41	2197.66	375.03	5.87	PASS	
16725.00†	7153.68	-1375.20	-8930.62	7114.68	7153.68	-1306.53	-11027.24	94.21	2097.74	375.55	5.59	PASS	
16825.00†	7153.39	-1375.85	-9030.62	7114.39	7153.39	-1306.53	-11027.24	94.01	1997.82	376.12	5.32	PASS	
16925.00†	7153.10	-1376.49	-9130.62	7114.10	7153.10	-1306.53	-11027.24	93.81	1897.91	376.77	5.04	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 123 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. HALL 1AWB Offset Wellpath: EX. HALL 1AWP

Facility: SEC.19-T06N-R66W Slot: SLOT#01 EX. HALL 1 (2062'FNL & 660'FEL, PR, CODL) Well: EX. HALL 1 Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
17025.00†	7152.81	-1377.14	-9230.62	7113.81	7152.81	-1306.53	-11027.24	93.61	1798.01	377.50	4.77	PASS	
17125.00†	7152.52	-1377.78	-9330.61	7113.52	7152.52	-1306.53	-11027.24	93.41	1698.12	378.33	4.50	PASS	
17225.00†	7152.24	-1378.43	-9430.61	7113.24	7152.24	-1306.53	-11027.24	93.21	1598.24	379.28	4.22	PASS	
17325.00†	7151.95	-1379.07	-9530.61	7112.95	7151.95	-1306.53	-11027.24	93.01	1498.39	380.38	3.94	PASS	
17425.00†	7151.66	-1379.72	-9630.61	7112.66	7151.66	-1306.53	-11027.24	92.80	1398.55	381.68	3.67	PASS	
17525.00†	7151.37	-1380.36	-9730.60	7112.37	7151.37	-1306.53	-11027.24	92.60	1298.73	383.21	3.39	PASS	
17625.00†	7151.08	-1381.01	-9830.60	7112.08	7151.08	-1306.53	-11027.24	92.40	1198.95	385.06	3.12	PASS	
17725.00†	7150.79	-1381.65	-9930.60	7111.79	7150.79	-1306.53	-11027.24	92.20	1099.21	387.32	2.84	PASS	
17825.00†	7150.51	-1382.30	-10030.60	7111.51	7150.51	-1306.53	-11027.24	92.00	999.52	390.12	2.56	PASS	
17925.00†	7150.22	-1382.94	-10130.59	7111.22	7150.22	-1306.53	-11027.24	91.80	899.89	393.68	2.29	PASS	
18000.13†	7150.00	-1383.43	-10205.72	7111.00	7150.00	-1306.53	-11027.24	91.65	825.11	397.03	2.08	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: EX. HALL 1AWB Offset Wellpath: EX. HALL 1AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

WELLPATH COMPOSITION - Offset Wellbore: EX. HALL 1AWB Offset Wellpath: EX. HALL 1AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
0.00	7760.00	Drift Indicator - Inclination Only (Actual Survey)	ASSUMED VERTICAL TO TD FROM COGCC <7760>	EX. HALL 1AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: EX. HALL 1AWB Offset Wellpath: EX. HALL 1AWP

MD Reference: Rig on SLOT#01 EX. HALL 1 (2062'FNL & 660'FEL, PR, CODL) (RT)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	0.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 124 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. HOOD #6-2-20 AWP Offset Wellpath: EX. HOOD #6-2-20 AWP

Facility: SEC.17-T06N-R66W Slot: SLOT#04 EX. HOOD #6-2-20 (659'FSL & 653'FEL, PR, NB/CD) Well: EX. HOOD #6-2-20 Threshold Value=1.00 † = interpolated/extrapolated station														
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status		
25.00	25.00	0.00	0.00	16.45	21.45	1495.52	-5704.09	-75.31	5896.88	50.17	119.82	PASS		
125.00†	125.00	0.00	0.00	792.78	794.23	1485.97	-5655.67	-75.28	5885.80	50.26	119.37	PASS		
225.00†	225.00	0.00	0.00	829.85	830.69	1479.75	-5653.15	-75.33	5874.92	50.35	118.93	PASS		
300.00	300.00	0.00	0.00	849.47	849.97	1476.24	-5652.10	-75.36	5867.54	50.42	118.62	PASS		
325.00†	325.00	-0.09	0.06	856.01	856.39	1475.05	-5651.80	140.86	5865.32	50.44	118.53	PASS		
425.00†	424.96	-2.20	1.61	882.25	882.15	1470.15	-5650.82	140.90	5858.91	50.54	118.17	PASS		
525.00†	524.77	-7.13	5.22	908.55	907.95	1465.07	-5650.23	140.90	5856.47	50.66	117.83	PASS		
625.00†	624.30	-14.86	10.88	929.27	928.26	1461.00	-5650.05	140.85	5858.04	50.78	117.58	PASS		
725.00†	723.44	-25.39	18.59	949.15	947.76	1457.11	-5650.15	140.76	5863.68	50.89	117.42	PASS		
825.00†	822.07	-38.71	28.34	968.98	967.20	1453.26	-5650.53	140.62	5873.38	51.00	117.35	PASS		
895.18	890.91	-49.71	36.39	982.83	980.79	1450.59	-5650.95	140.49	5882.58	51.08	117.37	PASS		
925.00†	920.09	-54.67	40.02	988.71	986.55	1449.46	-5651.17	140.49	5886.98	51.10	117.40	PASS		
1025.00†	1017.94	-71.32	52.20	1008.58	1006.04	1445.65	-5652.09	140.47	5902.57	51.17	117.54	PASS		
1125.00†	1115.79	-87.96	64.39	1030.13	1027.17	1441.61	-5653.35	140.46	5919.46	51.25	117.70	PASS		
1225.00†	1213.64	-104.60	76.57	1051.58	1048.21	1437.71	-5654.86	140.44	5937.63	51.32	117.88	PASS		
1325.00†	1311.48	-121.25	88.76	1072.94	1069.15	1433.95	-5656.62	140.43	5957.08	51.40	118.10	PASS		
1425.00†	1409.33	-137.89	100.94	1094.18	1089.99	1430.32	-5658.63	140.42	5977.78	51.47	118.34	PASS		
1525.00†	1507.18	-154.53	113.12	1125.55	1120.72	1424.99	-5661.99	140.40	5999.68	51.56	118.56	PASS		
1625.00†	1605.03	-171.18	125.31	1161.54	1155.85	1418.46	-5666.32	140.37	6022.59	51.66	118.77	PASS		
1725.00†	1702.88	-187.82	137.49	1197.28	1190.57	1411.50	-5671.11	140.34	6046.49	51.77	119.00	PASS		
1825.00†	1800.73	-204.47	149.67	1235.35	1227.39	1403.63	-5676.71	140.30	6071.36	51.60	119.29	PASS		
1925.00†	1898.58	-221.11	161.86	1273.09	1263.72	1395.39	-5682.75	140.26	6097.17	51.65	119.68	PASS		
2025.00†	1996.43	-237.75	174.04	1310.57	1299.63	1386.78	-5689.22	140.21	6123.92	51.71	120.05	PASS		
2125.00†	2094.28	-254.40	186.22	1347.78	1335.07	1377.82	-5696.09	140.15	6151.60	51.79	120.40	PASS		
2225.00†	2192.13	-271.04	198.41	1384.60	1369.97	1368.54	-5703.35	140.09	6180.20	51.88	120.76	PASS		
2325.00†	2289.98	-287.68	210.59	1509.31	1487.44	1335.16	-5728.60	139.87	6209.00	52.31	120.32	PASS		
2425.00†	2387.83	-304.33	222.77	2448.62	2340.19	973.89	-5870.98	137.37	6226.55	57.70	109.24	PASS		
2525.00†	2485.68	-320.97	234.96	2486.14	2374.02	958.12	-5874.72	137.26	6243.14	58.07	108.82	PASS		
2625.00†	2583.53	-337.62	247.14	2524.89	2408.95	941.87	-5878.95	137.16	6260.71	58.46	108.40	PASS		
2725.00†	2681.38	-354.26	259.33	2567.09	2447.00	924.30	-5883.88	137.04	6279.22	58.89	107.91	PASS		
2825.00†	2779.23	-370.90	271.51	2609.87	2485.60	906.64	-5889.21	136.92	6298.63	59.33	107.43	PASS		
2925.00†	2877.08	-387.55	283.69	2675.16	2544.42	879.63	-5897.76	136.74	6318.76	59.98	106.59	PASS		
3025.00†	2974.93	-404.19	295.88	2731.86	2595.30	855.84	-5905.51	136.58	6339.48	60.58	105.87	PASS		
3125.00†	3072.78	-420.83	308.06	2781.82	2639.80	834.31	-5912.78	136.43	6360.96	61.15	105.24	PASS		
3225.00†	3170.63	-437.48	320.24	2994.62	2827.21	738.48	-5943.87	135.77	6382.78	63.28	101.99	PASS		
3325.00†	3268.48	-454.12	332.43	3040.96	2868.63	718.64	-5950.04	135.63	6403.49	63.86	101.38	PASS		
3425.00†	3366.33	-470.77	344.61	3091.59	2914.24	697.79	-5957.03	135.50	6425.00	64.50	100.72	PASS		
3525.00†	3464.18	-487.41	356.79	3307.55	3107.13	605.36	-5986.72	134.89	6446.84	66.78	97.57	PASS		
3625.00†	3562.03	-504.05	368.98	3455.48	3239.27	541.26	-6004.50	134.47	6466.69	68.45	95.46	PASS		
3725.00†	3659.88	-520.70	381.16	3524.60	3300.97	511.22	-6012.68	134.28	6486.51	69.35	94.49	PASS		
3825.00†	3757.73	-537.34	393.34	3584.13	3354.07	485.29	-6019.97	134.11	6506.87	70.17	93.67	PASS		
3925.00†	3855.57	-553.98	405.53	3638.05	3402.12	461.85	-6026.90	133.96	6527.92	70.94	92.94	PASS		
4025.00†	3953.42	-570.63	417.71	3786.33	3536.01	400.68	-6044.66	133.58	6548.28	72.68	90.97	PASS		
4125.00†	4051.27	-587.27	429.90	3833.15	3578.43	381.72	-6050.43	133.46	6569.41	73.38	90.39	PASS		
4225.00†	4149.12	-603.92	442.08	3906.15	3644.34	351.80	-6059.83	133.28	6591.13	74.37	89.47	PASS		

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 125 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. HOOD #6-2-20 AWP Offset Wellpath: EX. HOOD #6-2-20 AWP

Facility: SEC.17-T06N-R66W Slot: SLOT#04 EX. HOOD #6-2-20 (659'FSL & 653'FEL, PR, NB/CD) Well: EX. HOOD #6-2-20 Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
4325.00†	4246.97	-620.56	454.26	3963.23	3695.54	327.75	-6067.46	133.13	6613.34	75.22	88.74	PASS	
4425.00†	4344.82	-637.20	466.45	4013.78	3740.15	305.08	-6074.69	132.98	6636.26	76.02	88.11	PASS	
4525.00†	4442.67	-653.85	478.63	4256.29	3948.70	185.99	-6108.12	132.19	6658.42	79.23	84.78	PASS	
4625.00†	4540.52	-670.49	490.81	4515.33	4175.94	65.09	-6136.56	131.43	6678.02	82.57	81.57	PASS	
4725.00†	4638.37	-687.13	503.00	4547.53	4204.62	50.82	-6139.86	131.34	6697.79	83.21	81.17	PASS	
4825.00†	4736.22	-703.78	515.18	4579.58	4233.13	36.62	-6143.45	131.26	6718.53	83.85	80.79	PASS	
4925.00†	4834.07	-720.42	527.36	4606.72	4257.24	24.60	-6146.73	131.18	6740.28	84.44	80.49	PASS	
5025.00†	4931.92	-737.07	539.55	4632.02	4279.66	13.38	-6150.05	131.11	6763.09	85.00	80.22	PASS	
5125.00†	5029.77	-753.71	551.73	4657.16	4301.91	2.22	-6153.60	131.05	6786.95	85.56	79.98	PASS	
5225.00†	5127.62	-770.35	563.91	4682.47	4324.26	-9.03	-6157.42	130.98	6811.85	86.11	79.75	PASS	
5325.00†	5225.47	-787.00	576.10	4767.53	4398.32	-48.66	-6170.79	130.73	6837.39	87.45	78.81	PASS	
5425.00†	5323.32	-803.64	588.28	5171.03	4758.55	-221.09	-6224.93	129.72	6861.36	92.56	74.69	PASS	
5525.00†	5421.17	-820.28	600.47	5628.14	5191.94	-359.94	-6261.71	129.12	6881.42	97.08	71.40	PASS	
5625.00†	5519.02	-836.93	612.65	5902.30	5462.12	-404.90	-6270.11	129.11	6896.53	99.10	70.09	PASS	
5725.00†	5616.87	-853.57	624.83	6045.43	5604.47	-419.77	-6271.10	129.18	6909.58	100.17	69.46	PASS	
5825.00†	5714.72	-870.22	637.02	6091.42	5650.25	-424.10	-6271.63	129.20	6923.34	100.78	69.17	PASS	
5925.00†	5812.57	-886.86	649.20	6268.46	5826.75	-437.74	-6272.43	129.32	6936.20	101.91	68.53	PASS	
6025.00†	5910.42	-903.50	661.38	6341.33	5899.52	-441.70	-6272.68	129.39	6949.43	102.60	68.20	PASS	
6125.00†	6008.27	-920.15	673.57	6413.92	5972.04	-444.69	-6273.12	129.46	6963.04	103.29	67.87	PASS	
6225.00†	6106.12	-936.79	685.75	6495.60	6053.69	-446.96	-6273.85	129.55	6977.02	104.01	67.54	PASS	
6325.00†	6203.97	-953.43	697.93	6615.46	6173.51	-449.44	-6274.74	129.69	6990.94	104.82	67.14	PASS	
6425.00†	6301.82	-970.08	710.12	6735.23	6293.27	-451.29	-6275.21	129.83	7004.58	105.64	66.75	PASS	
6525.00†	6399.66	-986.72	722.30	6813.09	6371.12	-452.32	-6275.45	129.92	7018.19	106.33	66.44	PASS	
6605.93	6478.85	-1000.19	732.16	6870.20	6428.22	-453.25	-6275.85	129.99	7029.50	106.87	66.21	PASS	
6625.00†	6497.54	-1003.38	734.20	6883.67	6441.70	-453.49	-6275.97	122.69	7031.93	107.00	66.15	PASS	
6725.00†	6595.97	-1020.39	735.57	6954.75	6512.76	-454.90	-6276.79	74.08	7035.61	107.82	65.68	PASS	
6825.00†	6693.34	-1037.59	721.30	7025.33	6583.30	-456.54	-6277.90	43.68	7024.13	109.15	64.77	PASS	
6925.00†	6787.24	-1054.57	691.74	7111.08	6669.01	-458.61	-6279.49	31.25	6997.65	110.57	63.69	PASS	
7025.00†	6875.37	-1070.91	647.62	7195.15	6753.05	-460.35	-6281.10	25.63	6956.64	111.74	62.65	PASS	
7125.00†	6955.55	-1086.20	590.03	7271.93	6829.81	-461.69	-6282.59	23.06	6902.08	112.68	61.64	PASS	
7225.00†	7025.81	-1100.06	520.38	7337.84	6895.70	-462.66	-6283.91	22.31	6835.32	113.41	60.64	PASS	
7325.00†	7084.42	-1112.16	440.40	7390.01	6947.85	-463.31	-6285.00	23.14	6758.01	113.95	59.67	PASS	
7425.00†	7129.94	-1122.20	352.04	7431.12	6988.94	-463.77	-6285.90	26.05	6672.01	114.33	58.71	PASS	
7525.00†	7161.25	-1129.93	257.49	7460.12	7017.94	-464.06	-6286.55	33.13	6579.40	114.58	57.77	PASS	
7625.00†	7177.57	-1135.16	159.08	7476.27	7034.09	-464.21	-6286.93	52.93	6482.42	114.73	56.85	PASS	
7682.94	7180.00	-1136.93	101.24	7479.56	7037.37	-464.24	-6287.00	81.45	6425.15	114.78	56.32	PASS	
7725.00†	7179.88	-1138.00	59.19	7480.31	7038.12	-464.24	-6287.02	81.50	6383.45	114.81	55.94	PASS	
7825.00†	7179.59	-1140.39	-40.78	7482.10	7039.91	-464.26	-6287.06	81.62	6284.32	114.88	55.03	PASS	
7925.00†	7179.29	-1142.78	-140.75	7483.89	7041.71	-464.27	-6287.10	81.75	6185.22	114.97	54.13	PASS	
8025.00†	7179.00	-1145.17	-240.72	7485.70	7043.51	-464.29	-6287.14	81.87	6086.15	115.07	53.21	PASS	
8125.00†	7178.71	-1147.56	-340.69	7487.50	7045.31	-464.30	-6287.19	81.99	5987.10	115.19	52.29	PASS	
8225.00†	7178.42	-1149.95	-440.66	7489.32	7047.13	-464.32	-6287.23	82.11	5888.09	115.33	51.37	PASS	
8325.00†	7178.13	-1152.34	-540.63	7491.14	7048.95	-464.34	-6287.27	82.24	5789.12	115.48	50.43	PASS	
8425.00†	7177.84	-1154.73	-640.61	7492.97	7050.77	-464.35	-6287.31	82.36	5690.18	115.65	49.50	PASS	
8525.00†	7177.55	-1157.12	-740.58	7494.80	7052.61	-464.37	-6287.36	82.49	5591.27	115.84	48.56	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 126 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. HOOD #6-2-20 AWP Offset Wellpath: EX. HOOD #6-2-20 AWP

Facility: SEC.17-T06N-R66W Slot: SLOT#04 EX. HOOD #6-2-20 (659'FSL & 653'FEL, PR, NB/CD) Well: EX. HOOD #6-2-20 Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
8625.00†	7177.25	-1159.52	-840.55	7496.64	7054.44	-464.38	-6287.40	82.61	5492.40	116.06	47.61	PASS	
8725.00†	7176.96	-1161.91	-940.52	7498.48	7056.29	-464.40	-6287.44	82.74	5393.58	116.30	46.65	PASS	
8825.00†	7176.67	-1164.30	-1040.49	7500.33	7058.14	-464.41	-6287.49	82.87	5294.80	116.57	45.69	PASS	
8925.00†	7176.38	-1166.69	-1140.46	7502.19	7060.00	-464.43	-6287.53	82.99	5196.06	116.86	44.73	PASS	
9025.00†	7176.09	-1169.08	-1240.43	7504.06	7061.86	-464.44	-6287.58	83.12	5097.38	117.19	43.75	PASS	
9125.00†	7175.80	-1171.47	-1340.40	7505.93	7063.73	-464.46	-6287.62	83.25	4998.74	117.55	42.78	PASS	
9225.00†	7175.51	-1173.86	-1440.37	7507.81	7065.61	-464.47	-6287.67	83.38	4900.16	117.95	41.79	PASS	
9325.00†	7175.21	-1176.25	-1540.34	7509.69	7067.49	-464.49	-6287.71	83.51	4801.64	118.38	40.80	PASS	
9425.00†	7174.92	-1178.64	-1640.32	7511.58	7069.38	-464.50	-6287.76	83.63	4703.17	118.86	39.80	PASS	
9525.00†	7174.63	-1181.03	-1740.29	7513.48	7071.28	-464.52	-6287.80	83.76	4604.78	119.38	38.80	PASS	
9625.00†	7174.34	-1183.42	-1840.26	7515.38	7073.18	-464.53	-6287.85	83.90	4506.45	119.95	37.79	PASS	
9725.00†	7174.05	-1185.82	-1940.23	7517.29	7075.09	-464.55	-6287.89	84.03	4408.20	120.57	36.77	PASS	
9825.00†	7173.76	-1188.21	-2040.20	7519.21	7077.01	-464.56	-6287.94	84.16	4310.02	121.25	35.75	PASS	
9925.00†	7173.47	-1190.60	-2140.17	7521.13	7078.93	-464.58	-6287.99	84.29	4211.94	122.00	34.72	PASS	
10025.00†	7173.17	-1192.99	-2240.14	7523.07	7080.86	-464.59	-6288.03	84.42	4113.94	122.81	33.69	PASS	
10125.00†	7172.88	-1195.38	-2340.11	7525.00	7082.80	-464.60	-6288.08	84.56	4016.04	123.69	32.65	PASS	
10225.00†	7172.59	-1197.77	-2440.08	7526.95	7084.75	-464.62	-6288.13	84.69	3918.25	124.65	31.61	PASS	
10325.00†	7172.30	-1200.16	-2540.05	7528.90	7086.70	-464.63	-6288.17	84.82	3820.57	125.69	30.56	PASS	
10425.00†	7172.01	-1202.55	-2640.03	7530.86	7088.65	-464.65	-6288.22	84.96	3723.01	126.83	29.51	PASS	
10525.00†	7171.72	-1204.94	-2740.00	7532.82	7090.62	-464.66	-6288.27	85.09	3625.58	128.07	28.46	PASS	
10625.00†	7171.42	-1207.33	-2839.97	7534.80	7092.59	-464.67	-6288.32	85.23	3528.30	129.41	27.41	PASS	
10725.00†	7171.13	-1209.72	-2939.94	7536.78	7094.57	-464.69	-6288.36	85.37	3431.17	130.87	26.35	PASS	
10825.00†	7170.84	-1212.11	-3039.91	7538.76	7096.56	-464.70	-6288.41	85.50	3334.20	132.46	25.30	PASS	
10925.00†	7170.55	-1214.51	-3139.88	7540.76	7098.55	-464.72	-6288.46	85.64	3237.43	134.19	24.25	PASS	
11025.00†	7170.26	-1216.90	-3239.85	7542.76	7100.55	-464.73	-6288.51	85.78	3140.85	136.07	23.20	PASS	
11125.00†	7169.97	-1219.29	-3339.82	7544.77	7102.56	-464.74	-6288.56	85.92	3044.49	138.11	22.15	PASS	
11225.00†	7169.68	-1221.68	-3439.79	7546.78	7104.57	-464.76	-6288.61	86.06	2948.38	140.33	21.11	PASS	
11325.00†	7169.38	-1224.07	-3539.76	7548.80	7106.59	-464.77	-6288.66	86.20	2852.53	142.74	20.08	PASS	
11425.00†	7169.09	-1226.46	-3639.74	7550.83	7108.62	-464.78	-6288.71	86.34	2756.97	145.37	19.05	PASS	
11525.00†	7168.80	-1228.85	-3739.71	7552.87	7110.66	-464.80	-6288.76	86.48	2661.74	148.24	18.04	PASS	
11625.00†	7168.51	-1231.24	-3839.68	7554.92	7112.70	-464.81	-6288.81	86.62	2566.86	151.36	17.03	PASS	
11725.00†	7168.22	-1233.63	-3939.65	7556.97	7114.75	-464.82	-6288.86	86.76	2472.39	154.77	16.04	PASS	
11825.00†	7167.93	-1236.02	-4039.62	7559.03	7116.81	-464.84	-6288.91	86.90	2378.37	158.49	15.07	PASS	
11925.00†	7167.64	-1238.41	-4139.59	7561.09	7118.88	-464.85	-6288.96	87.05	2284.86	162.55	14.11	PASS	
12025.00†	7167.34	-1240.81	-4239.56	7563.17	7120.95	-464.86	-6289.02	87.19	2191.92	166.99	13.18	PASS	
12125.00†	7167.05	-1243.20	-4339.53	7565.25	7123.04	-464.87	-6289.07	87.34	2099.62	171.85	12.26	PASS	
12225.00†	7166.76	-1245.59	-4439.50	7567.34	7125.13	-464.89	-6289.12	87.48	2008.06	177.19	11.37	PASS	
12325.00†	7166.47	-1247.98	-4539.47	7569.44	7127.22	-464.90	-6289.17	87.63	1917.34	183.04	10.51	PASS	
12425.00†	7166.18	-1250.37	-4639.45	7571.54	7129.33	-464.91	-6289.23	87.77	1827.59	189.46	9.68	PASS	
12525.00†	7165.89	-1252.76	-4739.42	7573.66	7131.44	-464.92	-6289.28	87.92	1738.95	196.52	8.88	PASS	
12625.00†	7165.60	-1255.15	-4839.39	7575.78	7133.56	-464.94	-6289.33	88.07	1651.61	204.29	8.11	PASS	
12725.00†	7165.30	-1257.54	-4939.36	7577.91	7135.69	-464.95	-6289.39	88.21	1565.78	212.84	7.38	PASS	
12825.00†	7165.01	-1259.93	-5039.33	7580.04	7137.82	-464.96	-6289.44	88.36	1481.72	222.24	6.69	PASS	
12925.00†	7164.72	-1262.32	-5139.30	7582.19	7139.97	-464.97	-6289.49	88.51	1399.76	232.57	6.03	PASS	
13025.00†	7164.43	-1264.71	-5239.27	7584.34	7142.12	-464.98	-6289.55	88.66	1320.28	243.88	5.43	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 127 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. HOOD #6-2-20 AWB Offset Wellpath: EX. HOOD #6-2-20 AWP

Facility: SEC.17-T06N-R66W Slot: SLOT#04 EX. HOOD #6-2-20 (659'FSL & 653'FEL, PR, NB/CD) Well: EX. HOOD #6-2-20 Threshold Value=1.00 † = interpolated/extrapolated station																
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status				
13125.00†	7164.14	-1267.10	-5339.24	7586.50	7144.28	-465.00	-6289.60	88.81	1243.77	256.21	4.87	PASS				
13225.00†	7163.85	-1269.50	-5439.21	7588.67	7146.45	-465.01	-6289.66	88.96	1170.80	269.56	4.35	PASS				
13325.00†	7163.56	-1271.89	-5539.18	7590.85	7148.62	-465.02	-6289.71	89.11	1102.07	283.84	3.89	PASS				
13425.00†	7163.26	-1274.28	-5639.16	7593.03	7150.81	-465.03	-6289.77	89.26	1038.43	298.86	3.48	PASS				
13525.00†	7162.97	-1276.67	-5739.13	7595.23	7153.00	-465.04	-6289.83	89.42	980.87	314.28	3.13	PASS				
13625.00†	7162.68	-1279.06	-5839.10	7597.43	7155.20	-465.05	-6289.88	89.57	930.52	329.53	2.83	PASS				
13725.00†	7162.39	-1281.45	-5939.07	7599.64	7157.41	-465.06	-6289.94	89.72	888.61	343.86	2.59	PASS				
13825.00†	7162.10	-1283.84	-6039.04	7601.88	7159.65	-465.07	-6290.00	89.88	856.37	356.33	2.41	PASS				
13925.00†	7161.81	-1286.23	-6139.01	7604.17	7161.95	-465.09	-6290.06	90.04	834.92	365.97	2.28	PASS				
14025.00†	7161.51	-1288.62	-6238.98	7606.46	7164.24	-465.10	-6290.12	90.20	825.12	372.00	2.22	PASS				
14032.94	7161.49	-1288.81	-6246.92	7606.65	7164.42	-465.10	-6290.12	90.21	824.85	372.31	2.22	PASS				
14078.97†	7161.36	-1289.36	-6292.94	7610.15	7167.92	-465.11	-6290.21	90.46	824.27	373.63	2.21	PASS				
14102.93†	7161.29	-1289.20	-6316.91	7608.24	7166.01	-465.11	-6290.16	90.33	824.55	373.92	2.21	PASS				
14125.00†	7161.22	-1288.79	-6338.97	7608.75	7166.52	-465.11	-6290.17	90.36	825.15	374.02	2.21	PASS				
14211.94	7160.97	-1284.71	-6425.81	7610.70	7168.47	-465.12	-6290.22	90.50	830.76	372.57	2.23	PASS				
14225.00†	7160.93	-1283.79	-6438.83	7611.00	7168.77	-465.12	-6290.23	90.52	832.09	372.10	2.24	PASS				
14325.00†	7160.64	-1276.82	-6538.59	7613.24	7171.01	-465.13	-6290.29	90.68	848.88	366.53	2.32	PASS				
14411.94	7160.39	-1270.75	-6625.32	7615.18	7172.95	-465.14	-6290.34	90.81	872.57	359.24	2.43	PASS				
14425.00†	7160.35	-1269.89	-6638.35	7615.48	7173.24	-465.14	-6290.35	90.84	876.86	357.98	2.45	PASS				
14525.00†	7160.06	-1266.21	-6738.27	7617.74	7175.50	-465.15	-6290.40	91.01	917.89	347.46	2.65	PASS				
14625.00†	7159.76	-1267.77	-6838.25	7620.02	7177.79	-465.16	-6290.46	91.20	971.89	336.15	2.90	PASS				

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: EX. HOOD #6-2-20 AWB Offset Wellpath: EX. HOOD #6-2-20 AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

WELLPATH COMPOSITION - Offset Wellbore: EX. HOOD #6-2-20 AWB Offset Wellpath: EX. HOOD #6-2-20 AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
0.00	7601.00	ISCWSA MWD, Rev. 4 (Standard)	MS ENERGY SERVICES MWD SURVEY FROM COGCC <82'-7601'>	EX. HOOD #6-2-20 AWB
7601.00	7662.00	Blind Drilling (std)	Projection to bit	EX. HOOD #6-2-20 AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: EX. HOOD #6-2-20 AWB Offset Wellpath: EX. HOOD #6-2-20 AWP

MD Reference: Rig on SLOT#04 EX. HOOD #6-2-20 (659'FSL & 653'FEL, PR, NB/CD) (RT)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	0.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 128 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: FRITZLER #21-22-14 AWB Offset Wellpath: FRITZLER #21-22-14 AWP

Facility: SEC.21-T06N-66W Slot: SLOT#01 EX:FRITZLER #21-22-14 (1702'FNL & 583'FWL SEC.21, PR) Well: FRITZLER #21-22-14 Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	26.71	40.71	-843.78	-4472.13	-100.69	4551.06	31.39	149.34	PASS	
125.00†	125.00	0.00	0.00	166.94	180.90	-846.25	-4470.13	-100.72	4549.87	50.13	92.44	PASS	
225.00†	225.00	0.00	0.00	276.49	290.25	-852.20	-4467.64	-100.80	4548.66	50.16	92.36	PASS	
300.00	300.00	0.00	0.00	411.43	424.40	-865.54	-4462.15	-100.98	4547.02	50.21	92.24	PASS	
325.00†	325.00	-0.09	0.06	437.46	450.21	-868.67	-4460.82	115.20	4546.38	50.22	92.20	PASS	
425.00†	424.96	-2.20	1.61	605.26	616.20	-891.05	-4450.81	114.99	4544.30	50.34	91.94	PASS	
525.00†	524.77	-7.13	5.22	768.05	776.84	-914.12	-4437.91	114.83	4541.76	50.33	91.58	PASS	
625.00†	624.30	-14.86	10.88	870.91	878.17	-929.24	-4428.89	114.76	4540.05	50.49	91.25	PASS	
725.00†	723.44	-25.39	18.59	1177.75	1179.15	-976.77	-4393.42	114.58	4536.36	50.90	90.43	PASS	
825.00†	822.07	-38.71	28.34	1401.31	1395.83	-1018.91	-4358.38	114.47	4531.36	51.36	89.52	PASS	
895.18	890.91	-49.71	36.39	1440.86	1433.87	-1027.40	-4351.64	114.49	4528.30	51.55	89.12	PASS	
925.00†	920.09	-54.67	40.02	1457.69	1450.09	-1030.94	-4348.87	114.48	4527.29	51.61	89.00	PASS	
1025.00†	1017.94	-71.32	52.20	1521.59	1511.81	-1044.07	-4338.81	114.44	4524.51	51.89	88.46	PASS	
1125.00†	1115.79	-87.96	64.39	1602.52	1590.15	-1060.33	-4326.62	114.40	4522.33	52.21	87.86	PASS	
1225.00†	1213.64	-104.60	76.57	1708.38	1692.72	-1081.16	-4310.80	114.35	4520.20	52.61	87.15	PASS	
1325.00†	1311.48	-121.25	88.76	1823.08	1804.15	-1102.51	-4293.92	114.32	4518.13	53.05	86.37	PASS	
1425.00†	1409.33	-137.89	100.94	1933.46	1911.30	-1122.82	-4276.91	114.28	4515.27	53.51	85.57	PASS	
1525.00†	1507.18	-154.53	113.12	2148.51	2120.02	-1161.04	-4242.05	114.23	4511.78	54.29	84.26	PASS	
1625.00†	1605.03	-171.18	125.31	2276.22	2243.68	-1183.02	-4218.86	114.20	4505.93	54.86	83.26	PASS	
1725.00†	1702.88	-187.82	137.49	2333.75	2299.40	-1193.00	-4208.62	114.18	4500.54	55.25	82.56	PASS	
1825.00†	1800.73	-204.47	149.67	2397.54	2361.19	-1204.54	-4197.76	114.16	4496.04	55.43	81.91	PASS	
1925.00†	1898.58	-221.11	161.86	2486.29	2446.99	-1221.77	-4183.03	114.12	4492.23	55.89	81.16	PASS	
2025.00†	1996.43	-237.75	174.04	2595.18	2551.94	-1244.03	-4164.36	114.05	4488.08	56.47	80.24	PASS	
2125.00†	2094.28	-254.40	186.22	2793.69	2742.23	-1287.61	-4128.44	113.88	4483.72	57.48	78.74	PASS	
2225.00†	2192.13	-271.04	198.41	2886.31	2830.31	-1309.31	-4109.78	113.78	4477.25	58.11	77.77	PASS	
2325.00†	2289.98	-287.68	210.59	2962.73	2903.50	-1325.83	-4095.24	113.71	4471.50	58.67	76.91	PASS	
2425.00†	2387.83	-304.33	222.77	3149.46	3081.77	-1367.02	-4057.99	113.54	4464.95	59.78	75.36	PASS	
2525.00†	2485.68	-320.97	234.96	3212.53	3142.15	-1380.03	-4045.22	113.49	4457.86	60.33	74.55	PASS	
2625.00†	2583.53	-337.62	247.14	3260.32	3187.99	-1389.87	-4036.05	113.46	4451.78	60.82	73.84	PASS	
2725.00†	2681.38	-354.26	259.33	3314.52	3240.01	-1401.48	-4026.21	113.41	4446.86	61.35	73.12	PASS	
2825.00†	2779.23	-370.90	271.51	3420.38	3341.76	-1423.87	-4007.38	113.34	4442.31	62.16	72.09	PASS	
2925.00†	2877.08	-387.55	283.69	3570.82	3486.46	-1454.84	-3980.29	113.23	4437.56	63.21	70.80	PASS	
3025.00†	2974.93	-404.19	295.88	3675.32	3587.05	-1475.22	-3960.61	113.17	4431.65	64.04	69.78	PASS	
3125.00†	3072.78	-420.83	308.06	3766.55	3674.57	-1494.26	-3943.32	113.10	4425.91	64.85	68.82	PASS	
3225.00†	3170.63	-437.48	320.24	3965.21	3862.77	-1542.57	-3902.00	112.85	4419.00	66.38	67.11	PASS	
3325.00†	3268.48	-454.12	332.43	4062.09	3953.92	-1567.39	-3880.56	112.70	4411.17	67.35	66.01	PASS	
3425.00†	3366.33	-470.77	344.61	4124.73	4012.97	-1583.34	-3866.99	112.61	4403.81	68.12	65.15	PASS	
3525.00†	3464.18	-487.41	356.79	4193.06	4077.71	-1600.04	-3852.94	112.52	4397.30	68.93	64.29	PASS	
3625.00†	3562.03	-504.05	368.98	4266.71	4147.89	-1617.02	-3838.40	112.44	4391.35	69.76	63.43	PASS	
3725.00†	3659.88	-520.70	381.16	4319.46	4198.42	-1628.56	-3828.61	112.40	4386.29	70.45	62.73	PASS	
3825.00†	3757.73	-537.34	393.34	4378.77	4255.51	-1640.95	-3818.37	112.35	4382.27	71.18	62.03	PASS	
3925.00†	3855.57	-553.98	405.53	4447.58	4322.11	-1654.17	-3807.29	112.32	4379.03	71.95	61.31	PASS	
4025.00†	3953.42	-570.63	417.71	4510.10	4382.87	-1665.54	-3797.87	112.30	4376.57	72.67	60.67	PASS	
4125.00†	4051.27	-587.27	429.90	4577.66	4448.65	-1677.60	-3788.33	112.29	4374.94	73.43	60.02	PASS	
4225.00†	4149.12	-603.92	442.08	4649.41	4518.70	-1689.85	-3778.79	112.28	4373.97	74.20	59.38	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 129 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: FRITZLER #21-22-14 AWB Offset Wellpath: FRITZLER #21-22-14 AWP

Facility: SEC.21-T06N-66W Slot: SLOT#01 EX:FRITZLER #21-22-14 (1702'FNL & 583'FWL SEC.21, PR) Well: FRITZLER #21-22-14 Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
4325.00†	4246.97	-620.56	454.26	4718.41	4586.30	-1700.81	-3770.31	112.29	4373.68	74.94	58.78	PASS	
4425.00†	4344.82	-637.20	466.45	4790.31	4656.96	-1711.31	-3762.19	112.31	4374.08	75.69	58.20	PASS	
4525.00†	4442.67	-653.85	478.63	4854.15	4719.86	-1719.99	-3755.57	112.34	4375.15	76.39	57.68	PASS	
4625.00†	4540.52	-670.49	490.81	4909.06	4774.08	-1727.13	-3750.51	112.37	4377.20	77.03	57.22	PASS	
4725.00†	4638.37	-687.13	503.00	4978.55	4842.79	-1735.77	-3744.86	112.42	4380.15	77.74	56.73	PASS	
4825.00†	4736.22	-703.78	515.18	5049.72	4913.27	-1744.19	-3739.62	112.47	4383.73	78.45	56.26	PASS	
4925.00†	4834.07	-720.42	527.36	5117.84	4980.81	-1751.81	-3735.19	112.53	4388.02	79.15	55.82	PASS	
5025.00†	4931.92	-737.07	539.55	5186.16	5048.66	-1758.87	-3731.40	112.60	4393.03	79.83	55.40	PASS	
5125.00†	5029.77	-753.71	551.73	5259.08	5121.19	-1765.65	-3728.04	112.69	4398.73	80.52	54.99	PASS	
5225.00†	5127.62	-770.35	563.91	5342.81	5204.56	-1772.59	-3724.83	112.80	4404.97	81.26	54.56	PASS	
5325.00†	5225.47	-787.00	576.10	5429.99	5291.45	-1779.01	-3721.84	112.92	4411.43	82.01	54.14	PASS	
5425.00†	5323.32	-803.64	588.28	5510.55	5371.81	-1784.27	-3719.60	113.05	4418.35	82.72	53.76	PASS	
5525.00†	5421.17	-820.28	600.47	5607.46	5468.52	-1790.02	-3717.20	113.21	4425.48	83.50	53.34	PASS	
5625.00†	5519.02	-836.93	612.65	5694.11	5555.03	-1794.58	-3715.35	113.36	4432.83	84.23	52.96	PASS	
5725.00†	5616.87	-853.57	624.83	5780.38	5641.20	-1798.54	-3713.88	113.52	4440.49	84.96	52.59	PASS	
5825.00†	5714.72	-870.22	637.02	5863.58	5724.33	-1801.69	-3712.87	113.68	4448.51	85.65	52.26	PASS	
5925.00†	5812.57	-886.86	649.20	5946.47	5807.19	-1804.09	-3712.32	113.85	4456.93	86.35	51.93	PASS	
6025.00†	5910.42	-903.50	661.38	6027.60	5888.29	-1805.90	-3712.19	114.03	4465.76	87.03	51.63	PASS	
6125.00†	6008.27	-920.15	673.57	6108.17	5968.85	-1807.59	-3712.42	114.20	4475.04	87.70	51.34	PASS	
6225.00†	6106.12	-936.79	685.75	6191.04	6051.70	-1809.25	-3712.98	114.38	4484.75	88.38	51.05	PASS	
6325.00†	6203.97	-953.43	697.93	6277.25	6137.89	-1811.08	-3713.80	114.57	4494.81	89.08	50.76	PASS	
6425.00†	6301.82	-970.08	710.12	6363.45	6224.05	-1813.07	-3714.82	114.75	4505.19	89.79	50.47	PASS	
6525.00†	6399.66	-986.72	722.30	6450.41	6310.98	-1815.23	-3716.06	114.94	4515.89	90.50	50.19	PASS	
6605.93	6478.85	-1000.19	732.16	6525.68	6386.22	-1817.04	-3717.26	115.10	4524.72	91.10	49.96	PASS	
6625.00†	6497.54	-1003.38	734.20	6543.44	6403.97	-1817.44	-3717.55	107.87	4526.54	91.24	49.90	PASS	
6725.00†	6595.97	-1020.39	735.57	6637.07	6497.57	-1819.39	-3719.22	59.40	4526.94	92.09	49.44	PASS	
6825.00†	6693.34	-1037.59	721.30	6730.31	6590.77	-1821.07	-3721.03	28.74	4512.05	93.32	48.63	PASS	
6925.00†	6787.24	-1054.57	691.74	6829.47	6689.90	-1822.67	-3722.98	15.61	4482.10	94.64	47.63	PASS	
7025.00†	6875.37	-1070.91	647.62	6922.79	6783.19	-1824.10	-3724.75	8.74	4437.72	95.77	46.59	PASS	
7125.00†	6955.55	-1086.20	590.03	7007.93	6868.32	-1825.34	-3726.29	4.15	4380.02	96.73	45.53	PASS	
7225.00†	7025.81	-1100.06	520.38	7066.91	6927.27	-1826.14	-3727.43	0.22	4310.55	97.43	44.48	PASS	
7325.00†	7084.42	-1112.16	440.40	7116.42	6976.77	-1826.77	-3728.54	-4.10	4231.11	97.97	43.42	PASS	
7425.00†	7129.94	-1122.20	352.04	7155.67	7016.00	-1827.24	-3729.51	-10.25	4143.57	98.37	42.35	PASS	
7525.00†	7161.25	-1129.93	257.49	7183.61	7043.93	-1827.55	-3730.26	-21.72	4050.01	98.63	41.28	PASS	
7625.00†	7177.57	-1135.16	159.08	7199.44	7059.75	-1827.72	-3730.70	-49.71	3952.71	98.80	40.22	PASS	
7682.94	7180.00	-1136.99	101.24	7202.84	7063.15	-1827.76	-3730.80	-80.00	3895.55	98.86	39.62	PASS	
7725.00†	7179.88	-1138.00	59.19	7203.75	7064.06	-1827.77	-3730.82	-80.08	3854.01	98.90	39.18	PASS	
7825.00†	7179.59	-1140.39	-40.78	7205.92	7066.23	-1827.79	-3730.88	-80.28	3755.30	99.01	38.13	PASS	
7925.00†	7179.29	-1142.78	-140.75	7208.11	7068.42	-1827.82	-3730.95	-80.49	3656.65	99.15	37.08	PASS	
8025.00†	7179.00	-1145.17	-240.72	7210.32	7070.63	-1827.84	-3731.01	-80.69	3558.08	99.31	36.02	PASS	
8125.00†	7178.71	-1147.56	-340.69	7212.56	7072.87	-1827.86	-3731.08	-80.90	3459.58	99.50	34.95	PASS	
8225.00†	7178.42	-1149.95	-440.66	7214.81	7075.12	-1827.89	-3731.14	-81.11	3361.18	99.73	33.88	PASS	
8325.00†	7178.13	-1152.34	-540.63	7217.09	7077.39	-1827.91	-3731.21	-81.33	3262.87	100.00	32.80	PASS	
8425.00†	7177.84	-1154.73	-640.61	7219.38	7079.69	-1827.93	-3731.28	-81.54	3164.66	100.31	31.71	PASS	
8525.00†	7177.55	-1157.12	-740.58	7221.70	7082.01	-1827.96	-3731.34	-81.76	3066.57	100.67	30.62	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 130 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: FRITZLER #21-22-14 AWB Offset Wellpath: FRITZLER #21-22-14 AWP

Facility: SEC.21-T06N-66W Slot: SLOT#01 EX:FRITZLER #21-22-14 (1702'FNL & 583'FWL SEC.21, PR) Well: FRITZLER #21-22-14 Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
8625.00†	7177.25	-1159.52	-840.55	7224.05	7084.35	-1827.98	-3731.41	-81.98	2968.60	101.09	29.52	PASS	
8725.00†	7176.96	-1161.91	-940.52	7226.41	7086.71	-1828.01	-3731.48	-82.20	2870.77	101.58	28.41	PASS	
8825.00†	7176.67	-1164.30	-1040.49	7228.80	7089.10	-1828.03	-3731.56	-82.43	2773.09	102.15	27.29	PASS	
8925.00†	7176.38	-1166.69	-1140.46	7231.21	7091.51	-1828.06	-3731.63	-82.65	2675.59	102.80	26.16	PASS	
9025.00†	7176.09	-1169.08	-1240.43	7233.64	7093.94	-1828.08	-3731.70	-82.88	2578.27	103.56	25.02	PASS	
9125.00†	7175.80	-1171.47	-1340.40	7236.10	7096.40	-1828.11	-3731.78	-83.11	2481.16	104.43	23.88	PASS	
9225.00†	7175.51	-1173.86	-1440.37	7238.59	7098.88	-1828.13	-3731.85	-83.35	2384.28	105.43	22.73	PASS	
9325.00†	7175.21	-1176.25	-1540.34	7241.09	7101.39	-1828.16	-3731.93	-83.58	2287.68	106.59	21.57	PASS	
9425.00†	7174.92	-1178.64	-1640.32	7243.63	7103.92	-1828.18	-3732.01	-83.82	2191.37	107.92	20.40	PASS	
9525.00†	7174.63	-1181.03	-1740.29	7246.19	7106.48	-1828.21	-3732.09	-84.07	2095.41	109.46	19.23	PASS	
9625.00†	7174.34	-1183.42	-1840.26	7248.77	7109.06	-1828.23	-3732.17	-84.31	1999.84	111.24	18.06	PASS	
9725.00†	7174.05	-1185.82	-1940.23	7251.38	7111.67	-1828.26	-3732.25	-84.56	1904.72	113.30	16.89	PASS	
9825.00†	7173.76	-1188.21	-2040.20	7254.02	7114.31	-1828.28	-3732.33	-84.81	1810.12	115.67	15.72	PASS	
9925.00†	7173.47	-1190.60	-2140.17	7256.68	7116.97	-1828.31	-3732.41	-85.06	1716.13	118.41	14.55	PASS	
10025.00†	7173.17	-1192.99	-2240.14	7259.38	7119.66	-1828.34	-3732.50	-85.32	1622.86	121.59	13.40	PASS	
10125.00†	7172.88	-1195.38	-2340.11	7262.10	7122.38	-1828.36	-3732.59	-85.57	1530.42	125.26	12.27	PASS	
10225.00†	7172.59	-1197.77	-2440.08	7264.85	7125.13	-1828.39	-3732.67	-85.84	1439.00	129.53	11.15	PASS	
10325.00†	7172.30	-1200.16	-2540.05	7267.63	7127.91	-1828.42	-3732.76	-86.10	1348.79	134.47	10.07	PASS	
10425.00†	7172.01	-1202.55	-2640.03	7270.43	7130.71	-1828.44	-3732.85	-86.37	1260.05	140.21	9.02	PASS	
10525.00†	7171.72	-1204.94	-2740.00	7273.27	7133.55	-1828.47	-3732.95	-86.64	1173.11	146.87	8.01	PASS	
10625.00†	7171.42	-1207.33	-2839.97	7276.14	7136.41	-1828.50	-3733.04	-86.91	1088.41	154.59	7.06	PASS	
10725.00†	7171.13	-1209.72	-2939.94	7279.03	7139.31	-1828.52	-3733.13	-87.19	1006.52	163.52	6.17	PASS	
10825.00†	7170.84	-1212.11	-3039.91	7281.96	7142.24	-1828.55	-3733.23	-87.47	928.17	173.77	5.36	PASS	
10925.00†	7170.55	-1214.51	-3139.88	7284.93	7145.19	-1828.58	-3733.33	-87.75	854.35	185.41	4.62	PASS	
11025.00†	7170.26	-1216.90	-3239.85	7287.92	7148.19	-1828.61	-3733.43	-88.03	786.32	198.37	3.97	PASS	
11125.00†	7169.97	-1219.29	-3339.82	7290.94	7151.21	-1828.63	-3733.53	-88.32	725.71	212.31	3.42	PASS	
11225.00†	7169.68	-1221.68	-3439.79	7294.00	7154.27	-1828.66	-3733.63	-88.61	674.54	226.49	2.98	PASS	
11325.00†	7169.38	-1224.07	-3539.76	7297.06	7157.32	-1828.69	-3733.73	-88.91	635.09	239.63	2.65	PASS	
11425.00†	7169.09	-1226.46	-3639.74	7300.05	7160.31	-1828.72	-3733.83	-89.19	609.63	250.05	2.44	PASS	
11525.00†	7168.80	-1228.85	-3739.71	7302.97	7163.23	-1828.74	-3733.93	-89.47	599.95	256.12	2.35	PASS	
11533.52†	7168.78	-1229.05	-3748.22	7303.78	7164.04	-1828.75	-3733.96	-89.55	599.89	256.40	2.34	PASS	
11558.32†	7168.70	-1229.65	-3773.01	7303.93	7164.19	-1828.75	-3733.96	-89.56	600.40	257.00	2.34	PASS	
11625.00†	7168.51	-1231.24	-3839.68	7305.83	7166.09	-1828.77	-3734.02	-89.74	606.80	257.02	2.36	PASS	
11725.00†	7168.22	-1233.63	-3939.65	7308.64	7168.89	-1828.80	-3734.11	-90.01	629.66	253.11	2.49	PASS	
11825.00†	7167.93	-1236.02	-4039.62	7311.38	7171.63	-1828.83	-3734.20	-90.27	666.87	245.70	2.72	PASS	
11925.00†	7167.64	-1238.41	-4139.59	7314.07	7174.32	-1828.86	-3734.29	-90.53	716.20	236.35	3.03	PASS	
12025.00†	7167.34	-1240.81	-4239.56	7316.70	7176.95	-1828.88	-3734.37	-90.78	775.34	226.34	3.43	PASS	
12125.00†	7167.05	-1243.20	-4339.53	7319.28	7179.53	-1828.91	-3734.45	-91.03	842.22	216.52	3.90	PASS	
12225.00†	7166.76	-1245.59	-4439.50	7321.81	7182.06	-1828.94	-3734.53	-91.27	915.16	207.33	4.42	PASS	
12325.00†	7166.47	-1247.98	-4539.47	7324.29	7184.54	-1828.96	-3734.60	-91.51	992.82	198.97	5.00	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: FRITZLER #21-22-14 AWB Offset Wellpath: FRITZLER #21-22-14 AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 131 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

HOLE & CASING SECTIONS - Offset Wellbore: FRITZLER #21-22-14 AWB Offset Wellpath: FRITZLER #21-22-14 AWP

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
12.25in Open Hole	16.00	700.00	684.00	21.00	700.73	-514.09	-2726.28	-532.56	-2717.58
8.625in Casing Surface	16.00	700.00	684.00	21.00	700.73	-514.09	-2726.28	-532.56	-2717.58
7.875in Open Hole	700.00	7325.00	6625.00	700.73	7176.25	-532.56	-2717.58	-814.43	-2501.54
4.5in Casing Production	16.00	7325.00	7309.00	21.00	7176.25	-514.09	-2726.28	-814.43	-2501.54

WELLPATH COMPOSITION - Offset Wellbore: FRITZLER #21-22-14 AWB Offset Wellpath: FRITZLER #21-22-14 AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
0.00	7422.00	ISCWSA MWD, Rev. 4 (Standard)	MS ENERGY GRID SURVEYS, CONVERTED TO TRUE NORTH <112-7422>	FRITZLER #21-22-14 AWB
7422.00	7473.00	Blind Drilling (std)	Projection to bit	FRITZLER #21-22-14 AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: FRITZLER #21-22-14 AWB Offset Wellpath: FRITZLER #21-22-14 AWP

MD Reference: 16' FROM MS SURVEYS (RKB)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	16.00ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 132 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. HOOD 41-20AWB Offset Wellpath: EX. HOOD 41-20AWP

Facility: SEC.20-T06N-R66W Slot: SLOT#03 EX. HOOD 41-20 (661'FNL & 661'FEL, PR, NB/CD) Well: EX. HOOD 41-20 Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	9.00	25.00	172.99	-5725.27	-88.27	5727.89	50.19	116.35	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: EX. HOOD 41-20AWB Offset Wellpath: EX. HOOD 41-20AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

WELLPATH COMPOSITION - Offset Wellbore: EX. HOOD 41-20AWB Offset Wellpath: EX. HOOD 41-20AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
0.00	7351.00	Drift Indicator - Inclination Only (Actual Survey)	ASSUMED VERTICAL TO TD FROM COGCC <7351>	EX. HOOD 41-20AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: EX. HOOD 41-20AWB Offset Wellpath: EX. HOOD 41-20AWP

MD Reference: Rig on SLOT#03 EX. HOOD 41-20 (661'FNL & 661'FEL, PR, NB/CD) (RT)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	0.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 133 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: HOOD 25C-22-M AWB Offset Wellpath: HOOD 25C-22-M AWP

Facility: SEC.20-T06N-R66W Slot: SLOT#02 HOOD 25C-22-M (745'FSL & 1122'FEL SEC.20) Well: HOOD 25C-22-M Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00†	25.00	0.00	0.00	8.00	25.00	-3702.83	-6165.25	-120.99	7191.75	25.57	292.29	PASS	
125.00†	125.00	0.00	0.00	173.29	199.29	-3702.48	-6164.37	-120.99	7191.11	50.18	146.10	PASS	
225.00†	225.00	0.00	0.00	1842.83	1830.45	-3473.65	-6080.97	-119.74	7184.84	50.43	145.08	PASS	
300.00†	300.00	0.00	0.00	12614.57	7179.51	-2001.00	-122.23	-176.50	7165.66	116.66	61.90	PASS	
325.00†	325.00	-0.09	0.06	12614.71	7179.51	-2001.01	-122.15	40.82	7141.64	116.84	61.60	PASS	
425.00†	424.96	-2.20	1.61	12616.07	7179.52	-2001.06	-120.79	45.79	7045.18	117.53	60.41	PASS	
525.00†	524.77	-7.13	5.22	12618.50	7179.54	-2001.15	-118.36	51.69	6948.19	118.20	59.23	PASS	
625.00†	624.30	-14.86	10.88	12621.31	7179.56	-2001.26	-115.55	58.67	6850.78	118.82	58.10	PASS	
725.00†	723.44	-25.39	18.59	12625.05	7179.58	-2001.42	-111.82	66.76	6753.03	119.41	56.98	PASS	
825.00†	822.07	-38.71	28.34	12629.74	7179.62	-2001.63	-107.13	75.84	6655.06	119.95	55.90	PASS	
895.18	890.91	-49.71	36.39	12633.60	7179.64	-2001.81	-103.28	82.64	6586.23	120.30	55.16	PASS	
925.00†	920.09	-54.67	40.02	12635.34	7179.66	-2001.89	-101.54	82.59	6556.98	120.45	54.85	PASS	
1025.00†	1017.94	-71.32	52.20	12641.23	7179.70	-2002.20	-95.65	82.40	6458.91	120.95	53.80	PASS	
1125.00†	1115.79	-87.96	64.39	12647.18	7179.74	-2002.53	-89.72	82.21	6360.89	121.47	52.76	PASS	
1225.00†	1213.64	-104.60	76.57	12653.19	7179.79	-2002.88	-83.72	82.01	6262.92	122.00	51.72	PASS	
1325.00†	1311.48	-121.25	88.76	12659.25	7179.83	-2003.26	-77.66	81.81	6165.00	122.56	50.67	PASS	
1425.00†	1409.33	-137.89	100.94	12665.38	7179.88	-2003.67	-71.55	81.61	6067.13	123.13	49.64	PASS	
1525.00†	1507.18	-154.53	113.12	12671.56	7179.93	-2004.11	-65.38	81.40	5969.32	123.73	48.60	PASS	
1625.00†	1605.03	-171.18	125.31	12677.82	7179.97	-2004.58	-59.15	81.18	5871.57	124.35	47.56	PASS	
1725.00†	1702.88	-187.82	137.49	12684.13	7180.02	-2005.08	-52.86	80.97	5773.88	124.99	46.53	PASS	
1825.00†	1800.73	-204.47	149.67	12690.51	7180.07	-2005.61	-46.50	80.75	5676.26	125.45	45.50	PASS	
1925.00†	1898.58	-221.11	161.86	12696.95	7180.12	-2006.17	-40.08	80.52	5578.70	126.13	44.47	PASS	
2025.00†	1996.43	-237.75	174.04	12703.45	7180.17	-2006.76	-33.61	80.29	5481.21	126.84	43.45	PASS	
2125.00†	2094.28	-254.40	186.22	12710.61	7180.23	-2007.45	-26.49	80.03	5383.80	127.59	42.42	PASS	
2225.00†	2192.13	-271.04	198.41	12718.51	7180.29	-2008.24	-18.62	79.75	5286.47	128.39	41.40	PASS	
2325.00†	2289.98	-287.68	210.59	12726.47	7180.36	-2009.06	-10.70	79.46	5189.21	129.22	40.37	PASS	
2425.00†	2387.83	-304.33	222.77	12734.49	7180.42	-2009.92	-2.73	79.16	5092.03	130.09	39.35	PASS	
2525.00†	2485.68	-320.97	234.96	12742.58	7180.48	-2010.83	5.30	78.86	4994.95	130.99	38.33	PASS	
2625.00†	2583.53	-337.62	247.14	12750.71	7180.54	-2011.77	13.38	78.55	4897.96	131.93	37.32	PASS	
2725.00†	2681.38	-354.26	259.33	12758.91	7180.60	-2012.76	21.52	78.24	4801.06	132.90	36.31	PASS	
2825.00†	2779.23	-370.90	271.51	12767.16	7180.66	-2013.78	29.71	77.92	4704.27	133.92	35.31	PASS	
2925.00†	2877.08	-387.55	283.69	12775.49	7180.73	-2014.85	37.96	77.59	4607.59	134.98	34.31	PASS	
3025.00†	2974.93	-404.19	295.88	12783.86	7180.79	-2015.96	46.27	77.26	4511.02	136.09	33.31	PASS	
3125.00†	3072.78	-420.83	308.06	12792.30	7180.85	-2017.12	54.63	76.92	4414.59	137.25	32.33	PASS	
3225.00†	3170.63	-437.48	320.24	12986.42	7182.46	-2032.47	247.98	68.70	4317.87	143.04	30.33	PASS	
3325.00†	3268.48	-454.12	332.43	13001.51	7182.63	-2032.72	263.08	68.02	4221.06	144.47	29.36	PASS	
3425.00†	3366.33	-470.77	344.61	13016.60	7182.80	-2032.96	278.16	67.33	4124.36	145.95	28.39	PASS	
3525.00†	3464.18	-487.41	356.79	13031.67	7182.97	-2033.17	293.23	66.63	4027.76	147.49	27.43	PASS	
3625.00†	3562.03	-504.05	368.98	13046.72	7183.14	-2033.37	308.28	65.93	3931.28	149.11	26.49	PASS	
3725.00†	3659.88	-520.70	381.16	13061.77	7183.32	-2033.54	323.32	65.21	3834.93	150.79	25.55	PASS	
3825.00†	3757.73	-537.34	393.34	13078.74	7183.52	-2033.71	340.29	64.39	3738.71	152.60	24.61	PASS	
3925.00†	3855.57	-553.98	405.53	13096.05	7183.71	-2033.86	357.60	63.54	3642.64	154.49	23.68	PASS	
4025.00†	3953.42	-570.63	417.71	13113.16	7183.89	-2033.99	374.71	62.69	3546.71	156.48	22.76	PASS	
4125.00†	4051.27	-587.27	429.90	13130.06	7184.05	-2034.10	391.60	61.84	3450.95	158.55	21.86	PASS	
4225.00†	4149.12	-603.92	442.08	13146.75	7184.20	-2034.19	408.30	60.98	3355.38	160.73	20.96	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 134 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: HOOD 25C-22-M AWB Offset Wellpath: HOOD 25C-22-M AWP

Facility: SEC.20-T06N-R66W Slot: SLOT#02 HOOD 25C-22-M (745'FSL & 1122'FEL SEC.20) Well: HOOD 25C-22-M Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
4325.00†	4246.97	-620.56	454.26	13158.59	7184.31	-2034.25	420.14	60.37	3260.00	162.91	20.09	PASS	
4425.00†	4344.82	-637.20	466.45	13165.84	7184.37	-2034.31	427.38	59.99	3164.88	165.10	19.25	PASS	
4525.00†	4442.67	-653.85	478.63	13173.19	7184.44	-2034.39	434.73	59.61	3070.03	167.41	18.41	PASS	
4625.00†	4540.52	-670.49	490.81	13180.64	7184.51	-2034.50	442.19	59.21	2975.49	169.88	17.58	PASS	
4725.00†	4638.37	-687.13	503.00	13188.21	7184.59	-2034.63	449.76	58.81	2881.29	172.49	16.77	PASS	
4825.00†	4736.22	-703.78	515.18	13195.89	7184.67	-2034.80	457.43	58.39	2787.45	175.28	15.96	PASS	
4925.00†	4834.07	-720.42	527.36	13203.69	7184.76	-2035.00	465.22	57.97	2694.01	178.25	15.17	PASS	
5025.00†	4931.92	-737.07	539.55	13211.60	7184.85	-2035.23	473.13	57.54	2601.02	181.42	14.39	PASS	
5125.00†	5029.77	-753.71	551.73	13219.63	7184.94	-2035.49	481.16	57.10	2508.53	184.81	13.62	PASS	
5225.00†	5127.62	-770.35	563.91	13227.78	7185.04	-2035.79	489.31	56.65	2416.59	188.44	12.87	PASS	
5325.00†	5225.47	-787.00	576.10	13236.06	7185.15	-2036.12	497.58	56.19	2325.26	192.34	12.13	PASS	
5425.00†	5323.32	-803.64	588.28	13244.49	7185.26	-2036.50	506.00	55.71	2234.62	196.52	11.41	PASS	
5525.00†	5421.17	-820.28	600.47	13253.48	7185.38	-2036.94	514.97	55.21	2144.76	201.03	10.70	PASS	
5625.00†	5519.02	-836.93	612.65	13262.51	7185.50	-2037.42	523.99	54.69	2055.77	205.89	10.02	PASS	
5725.00†	5616.87	-853.57	624.83	13271.59	7185.61	-2037.96	533.05	54.17	1967.77	211.12	9.35	PASS	
5825.00†	5714.72	-870.22	637.02	13280.72	7185.72	-2038.54	542.16	53.65	1880.91	216.76	8.70	PASS	
5925.00†	5812.57	-886.86	649.20	13289.89	7185.82	-2039.17	551.31	53.12	1795.34	222.84	8.08	PASS	
6025.00†	5910.42	-903.50	661.38	13299.10	7185.92	-2039.85	560.50	52.58	1711.25	229.40	7.48	PASS	
6125.00†	6008.27	-920.15	673.57	13308.37	7186.02	-2040.58	569.74	52.04	1628.88	236.45	6.91	PASS	
6225.00†	6106.12	-936.79	685.75	13317.68	7186.11	-2041.37	579.01	51.49	1548.51	244.03	6.36	PASS	
6325.00†	6203.97	-953.43	697.93	13327.03	7186.20	-2042.20	588.33	50.94	1470.45	252.13	5.85	PASS	
6425.00†	6301.82	-970.08	710.12	13336.83	7186.29	-2043.12	598.09	50.36	1395.09	260.77	5.36	PASS	
6525.00†	6399.66	-986.72	722.30	13347.85	7186.39	-2044.21	609.05	49.70	1322.89	269.95	4.91	PASS	
6605.93	6478.85	-1000.19	732.16	13356.82	7186.47	-2045.11	617.97	49.16	1267.13	277.67	4.57	PASS	
6625.00†	6497.54	-1003.38	734.20	13358.72	7186.49	-2045.31	619.86	40.25	1254.33	279.51	4.50	PASS	
6725.00†	6595.97	-1020.39	735.57	13361.74	7186.52	-2045.62	622.87	-16.36	1188.51	289.00	4.12	PASS	
6825.00†	6693.34	-1037.59	721.30	13352.95	7186.44	-2044.72	614.13	-53.53	1126.47	297.94	3.79	PASS	
6925.00†	6787.24	-1054.57	691.74	13332.66	7186.26	-2042.72	593.93	-71.28	1070.15	305.83	3.50	PASS	
7025.00†	6875.37	-1070.91	647.62	13305.33	7185.99	-2040.34	566.71	-81.03	1021.19	312.51	3.27	PASS	
7125.00†	6955.55	-1086.20	590.03	13268.77	7185.57	-2037.79	530.24	-86.63	980.82	317.48	3.09	PASS	
7225.00†	7025.81	-1100.06	520.38	13222.97	7184.98	-2035.61	484.50	-89.69	949.67	320.57	2.97	PASS	
7325.00†	7084.42	-1112.16	440.40	13168.24	7184.39	-2034.33	429.79	-91.06	927.63	321.89	2.89	PASS	
7425.00†	7129.94	-1122.20	352.04	13081.45	7183.55	-2033.73	343.00	-90.76	913.15	320.43	2.85	PASS	
7525.00†	7161.25	-1129.93	257.49	12979.03	7182.38	-2032.33	240.60	-90.13	902.81	317.69	2.85	PASS	
7625.00†	7177.57	-1135.16	159.08	12779.05	7180.75	-2015.32	41.50	-89.34	887.98	306.91	2.90	PASS	
7682.94	7180.00	-1136.99	101.24	12739.69	7180.46	-2010.50	2.44	-90.05	879.08	307.24	2.87	PASS	
7725.00†	7179.88	-1138.00	59.19	12710.90	7180.23	-2007.48	-26.20	-90.04	873.66	307.46	2.85	PASS	
7825.00†	7179.59	-1140.39	-40.78	12646.91	7179.74	-2002.51	-89.98	-90.02	863.52	308.38	2.80	PASS	
7925.00†	7179.29	-1142.78	-140.75	12576.61	7179.24	-1999.87	-160.23	-90.00	857.31	308.77	2.78	PASS	
8025.00†	7179.00	-1145.17	-240.72	12487.28	7178.47	-1998.91	-249.55	-89.97	853.78	307.93	2.78	PASS	
8125.00†	7178.71	-1147.56	-340.69	12380.56	7176.27	-1997.20	-356.23	-89.84	849.78	306.12	2.78	PASS	
8225.00†	7178.42	-1149.95	-440.66	12295.30	7173.39	-1996.07	-441.44	-89.66	846.13	305.89	2.77	PASS	
8325.00†	7178.13	-1152.34	-540.63	12180.40	7169.15	-1995.91	-556.25	-89.40	843.76	303.85	2.78	PASS	
8425.00†	7177.84	-1154.73	-640.61	12053.95	7165.97	-1991.91	-682.59	-89.20	838.31	300.95	2.79	PASS	
8525.00†	7177.55	-1157.12	-740.58	11933.77	7164.83	-1983.17	-802.44	-89.13	828.46	298.41	2.78	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 135 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: HOOD 25C-22-M AWB Offset Wellpath: HOOD 25C-22-M AWP

Facility: SEC.20-T06N-R66W Slot: SLOT#02 HOOD 25C-22-M (745'FSL & 1122'FEL SEC.20) Well: HOOD 25C-22-M Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
8625.00†	7177.25	-1159.52	-840.55	11865.29	7164.50	-1978.91	-870.79	-89.12	820.05	300.26	2.74	PASS	
8725.00†	7176.96	-1161.91	-940.52	11807.52	7164.82	-1978.29	-928.54	-89.15	816.56	302.53	2.70	PASS	
8825.00†	7176.67	-1164.30	-1040.49	11746.77	7165.39	-1980.64	-989.24	-89.20	818.03	304.05	2.69	PASS	
8925.00†	7176.38	-1166.69	-1140.46	11675.80	7165.97	-1986.59	-1059.95	-89.26	823.91	304.72	2.71	PASS	
9025.00†	7176.09	-1169.08	-1240.43	11578.29	7166.76	-1996.92	-1156.91	-89.34	832.10	304.44	2.74	PASS	
9125.00†	7175.80	-1171.47	-1340.40	11441.41	7167.44	-2007.68	-1293.34	-89.42	837.58	302.74	2.77	PASS	
9225.00†	7175.51	-1173.86	-1440.37	11337.23	7168.29	-2013.30	-1397.37	-89.50	840.57	302.27	2.79	PASS	
9325.00†	7175.21	-1176.25	-1540.34	11229.34	7169.33	-2018.40	-1505.13	-89.60	842.91	301.66	2.80	PASS	
9425.00†	7174.92	-1178.64	-1640.32	11124.09	7170.26	-2022.34	-1610.31	-89.68	844.24	301.19	2.81	PASS	
9525.00†	7174.63	-1181.03	-1740.29	11026.06	7171.43	-2025.89	-1708.27	-89.78	845.47	301.11	2.81	PASS	
9625.00†	7174.34	-1183.42	-1840.26	10931.95	7172.37	-2029.75	-1802.29	-89.86	847.18	301.26	2.82	PASS	
9725.00†	7174.05	-1185.82	-1940.23	10830.21	7174.18	-2034.28	-1903.92	-90.01	849.24	301.07	2.83	PASS	
9825.00†	7173.76	-1188.21	-2040.20	10706.19	7177.59	-2037.77	-2027.83	-90.26	849.66	299.74	2.84	PASS	
9925.00†	7173.47	-1190.60	-2140.17	10575.43	7179.31	-2037.61	-2158.58	-90.40	847.24	297.74	2.85	PASS	
10025.00†	7173.17	-1192.99	-2240.14	10441.74	7180.74	-2031.75	-2292.12	-90.53	840.41	295.14	2.85	PASS	
10125.00†	7172.88	-1195.38	-2340.11	10349.26	7181.52	-2025.70	-2384.40	-90.61	831.55	295.68	2.82	PASS	
10225.00†	7172.59	-1197.77	-2440.08	10282.01	7182.39	-2023.43	-2451.60	-90.69	825.80	298.07	2.77	PASS	
10325.00†	7172.30	-1200.16	-2540.05	10214.04	7183.14	-2023.80	-2519.55	-90.75	823.96	300.05	2.75	PASS	
10425.00†	7172.01	-1202.55	-2640.03	10093.91	7183.90	-2025.75	-2639.66	-90.83	823.28	298.93	2.76	PASS	
10525.00†	7171.72	-1204.94	-2740.00	9979.76	7185.26	-2024.72	-2753.80	-90.95	820.01	298.08	2.76	PASS	
10625.00†	7171.42	-1207.33	-2839.97	9885.10	7186.48	-2022.99	-2848.43	-91.06	815.84	298.54	2.74	PASS	
10725.00†	7171.13	-1209.72	-2939.94	9804.86	7187.83	-2023.02	-2928.66	-91.18	813.55	299.90	2.72	PASS	
10825.00†	7170.84	-1212.11	-3039.91	9719.68	7189.36	-2025.25	-3013.79	-91.30	813.76	300.88	2.71	PASS	
10925.00†	7170.55	-1214.51	-3139.88	9626.76	7189.58	-2028.42	-3106.66	-91.34	814.81	301.43	2.71	PASS	
11025.00†	7170.26	-1216.90	-3239.85	9535.89	7187.22	-2032.90	-3197.39	-91.19	817.28	302.06	2.71	PASS	
11125.00†	7169.97	-1219.29	-3339.82	9427.53	7183.99	-2038.29	-3305.56	-90.98	819.84	301.91	2.72	PASS	
11225.00†	7169.68	-1221.68	-3439.79	9288.60	7180.02	-2041.27	-3444.39	-90.73	819.67	300.01	2.74	PASS	
11325.00†	7169.38	-1224.07	-3539.76	9167.64	7176.58	-2038.14	-3565.26	-90.52	814.50	298.90	2.73	PASS	
11425.00†	7169.09	-1226.46	-3639.74	9078.22	7174.33	-2035.85	-3654.62	-90.38	809.54	299.98	2.70	PASS	
11525.00†	7168.80	-1228.85	-3739.71	8984.27	7172.05	-2034.67	-3748.53	-90.24	805.88	300.78	2.68	PASS	
11625.00†	7168.51	-1231.24	-3839.68	8883.53	7169.69	-2033.55	-3849.23	-90.09	802.37	301.19	2.67	PASS	
11725.00†	7168.22	-1233.63	-3939.65	8786.03	7168.22	-2032.49	-3946.72	-90.01	798.89	301.87	2.65	PASS	
11825.00†	7167.93	-1236.02	-4039.62	8699.27	7168.26	-2032.34	-4033.48	-90.03	796.34	303.27	2.63	PASS	
11925.00†	7167.64	-1238.41	-4139.59	8615.80	7168.31	-2033.83	-4116.93	-90.05	795.74	304.83	2.61	PASS	
12025.00†	7167.34	-1240.81	-4239.56	8505.83	7168.47	-2036.78	-4226.86	-90.08	796.07	305.10	2.61	PASS	
12125.00†	7167.05	-1243.20	-4339.53	8415.68	7168.36	-2038.71	-4316.99	-90.09	795.83	306.45	2.60	PASS	
12225.00†	7166.76	-1245.59	-4439.50	8321.41	7168.23	-2041.76	-4411.21	-90.10	796.68	307.68	2.59	PASS	
12325.00†	7166.47	-1247.98	-4539.47	8180.92	7168.21	-2043.37	-4551.68	-90.13	795.49	306.78	2.60	PASS	
12425.00†	7166.18	-1250.37	-4639.45	8066.78	7168.26	-2040.05	-4665.77	-90.16	790.12	307.29	2.57	PASS	
12525.00†	7165.89	-1252.76	-4739.42	7971.30	7168.16	-2037.08	-4761.19	-90.18	784.63	309.12	2.54	PASS	
12625.00†	7165.60	-1255.15	-4839.39	7847.84	7167.89	-2032.05	-4884.56	-90.18	778.22	309.52	2.52	PASS	
12725.00†	7165.30	-1257.54	-4939.36	7734.45	7166.92	-2023.78	-4997.62	-90.14	768.45	310.50	2.48	PASS	
12825.00†	7165.01	-1259.93	-5039.33	7672.84	7163.09	-2019.79	-5058.96	-89.86	760.11	314.76	2.42	PASS	
12887.93†	7164.83	-1261.44	-5102.24	7647.57	7159.82	-2019.78	-5084.02	-89.62	758.57	317.67	2.39	PASS	
12925.00†	7164.72	-1262.32	-5139.30	7633.88	7157.55	-2020.31	-5097.51	-89.45	759.17	319.10	2.38	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 136 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: HOOD 25C-22-M AWB Offset Wellpath: HOOD 25C-22-M AWP

Facility: SEC.20-T06N-R66W Slot: SLOT#02 HOOD 25C-22-M (745'FSL & 1122'FEL SEC.20) Well: HOOD 25C-22-M Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
12965.56†	7164.60	-1263.29	-5179.85	7618.36	7154.56	-2021.36	-5112.71	-89.23	761.10	320.35	2.38	PASS	
13025.00†	7164.43	-1264.71	-5239.27	7592.23	7148.60	-2024.13	-5137.99	-88.79	766.31	321.63	2.39	PASS	
13125.00†	7164.14	-1267.10	-5339.24	7543.52	7135.05	-2031.47	-5184.18	-87.80	780.47	322.67	2.42	PASS	
13225.00†	7163.85	-1269.50	-5439.21	7493.87	7118.09	-2041.53	-5229.73	-86.59	801.25	322.43	2.48	PASS	
13325.00†	7163.56	-1271.89	-5539.18	7443.41	7097.23	-2053.50	-5274.06	-85.14	828.01	321.02	2.58	PASS	
13425.00†	7163.26	-1274.28	-5639.16	7386.93	7069.60	-2068.20	-5321.06	-83.27	860.39	320.10	2.69	PASS	
13525.00†	7162.97	-1276.67	-5739.13	7329.84	7037.21	-2083.03	-5365.64	-81.16	897.52	315.68	2.85	PASS	
13625.00†	7162.68	-1279.06	-5839.10	7262.88	6994.23	-2099.07	-5414.39	-78.45	938.71	312.01	3.01	PASS	
13725.00†	7162.39	-1281.45	-5939.07	7211.75	6958.24	-2110.00	-5449.00	-76.25	984.04	306.53	3.22	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: HOOD 25C-22-M AWB Offset Wellpath: HOOD 25C-22-M AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: HOOD 25C-22-M AWB Offset Wellpath: HOOD 25C-22-M AWP

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
13.5in Open Hole	25.00	1762.00	1737.00	42.00	1752.95	-2256.78	-3758.62	-2193.37	-3735.64
9.625in Casing Surface	25.00	1762.00	1737.00	42.00	1752.95	-2256.78	-3758.62	-2193.37	-3735.64
8.5in Open Hole	1762.00	15615.00	13853.00	1752.95	7196.89	-2193.37	-3735.64	-1756.34	-1004.37

WELLPATH COMPOSITION - Offset Wellbore: HOOD 25C-22-M AWB Offset Wellpath: HOOD 25C-22-M AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
25.00	1712.00	Custom BHI NaviTrak (Standard Rotating+Axial Corr) (Rockies 0.03Gt model)	BHI NAVITRAK 13.5" (STD ROTATING, AXIAL, ROCKIES GT)<109-1712>	HOOD 25C-22-M AWB
1712.00	15591.00	Custom BHI AutoTrak Curve (IFR1, Short) (Rockies 0.03Gt model)	BHI ATC 8.5" (IFR, SHORT, ROCKIES GT)<1792-15591>	HOOD 25C-22-M AWB
15591.00	15615.00	Blind Drilling (std)	Projection to bit	HOOD 25C-22-M AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: HOOD 25C-22-M AWB Offset Wellpath: HOOD 25C-22-M AWP

MD Reference: PRECISION 562 (25') (RKB)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	25.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 137 of 202

**BAKER
HUGHES**
a GE company



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. LEFFLER FARM 1-21 AWP Offset Wellpath: EX. LEFFLER FARM 1-21 AWP

Facility: SEC.21-T06N-R66W		Slot: SLOT#05 EX. LEFFLER FARM 1-21 (860'FNL & 1980'FWL, PA, CODL)		Well: EX. LEFFLER FARM 1-21		Threshold Value=1.00		† = interpolated/extrapolated station				
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status
25.00	25.00	0.00	0.00	4.00	25.00	18.41	-3075.20	-89.66	3075.25	50.18	62.47	PASS

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: EX. LEFFLER FARM 1-21 AWP Offset Wellpath: EX. LEFFLER FARM 1-21 AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

WELLPATH COMPOSITION - Offset Wellbore: EX. LEFFLER FARM 1-21 AWP Offset Wellpath: EX. LEFFLER FARM 1-21 AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
0.00	7320.00	Drift Indicator - Inclination Only (Actual Survey)	ASSUMED VERTICAL TO TD FROM COGCC <7320>	EX. LEFFLER FARM 1-21 AWP

OFFSET WELLPATH REFERENCE - Offset Wellbore: EX. LEFFLER FARM 1-21 AWP Offset Wellpath: EX. LEFFLER FARM 1-21 AWP

MD Reference: Rig on SLOT#05 EX. LEFFLER FARM 1-21 (860'FNL & 1980'FWL, PA, CODL) (RT)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	0.00ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 138 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. FRITZLER 0-2-21 AWB Offset Wellpath: EX. FRITZLER 0-2-21 AWP

Facility: SEC.21-T06N-66W Slot: SLOT#05 EX. FRITZLER 0-2-21 (1706'FNL & 518'FWL, PR, NB/CD) Well: EX. FRITZLER 0-2-21 Threshold Value=1.00 † = Interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	-5.00	25.00	-850.99	-4536.17	-100.63	4615.31	25.57	187.56	PASS	
125.00†	125.00	0.00	0.00	92.92	122.92	-850.86	-4536.22	-100.62	4615.33	50.21	93.70	PASS	
225.00†	225.00	0.00	0.00	190.72	220.72	-850.42	-4536.37	-100.62	4615.40	50.26	93.61	PASS	
300.00	300.00	0.00	0.00	264.07	294.07	-849.90	-4536.55	-100.61	4615.48	50.30	93.53	PASS	
325.00†	325.00	-0.09	0.06	288.52	318.51	-849.69	-4536.62	115.60	4615.56	50.31	93.51	PASS	
425.00†	424.96	-2.20	1.61	386.24	416.23	-848.66	-4536.98	115.62	4616.86	50.37	93.42	PASS	
525.00†	524.77	-7.13	5.22	483.74	513.72	-847.34	-4537.44	115.65	4619.72	50.45	93.34	PASS	
625.00†	624.30	-14.86	10.88	580.86	610.83	-845.73	-4538.00	115.69	4624.15	50.52	93.29	PASS	
725.00†	723.44	-25.39	18.59	677.46	707.40	-843.83	-4538.65	115.75	4630.18	50.61	93.25	PASS	
825.00†	822.07	-38.71	28.34	753.53	783.45	-842.14	-4539.27	115.77	4637.89	50.69	93.24	PASS	
895.18	890.91	-49.71	36.39	780.61	810.52	-841.54	-4539.72	115.71	4644.81	50.75	93.28	PASS	
925.00†	920.09	-54.67	40.02	792.06	821.97	-841.29	-4539.99	115.74	4648.11	50.77	93.31	PASS	
1025.00†	1017.94	-71.32	52.20	830.39	860.27	-840.50	-4541.19	115.84	4660.02	50.84	93.42	PASS	
1125.00†	1115.79	-87.96	64.39	911.44	941.22	-838.21	-4544.53	116.06	4672.85	50.97	93.43	PASS	
1225.00†	1213.64	-104.60	76.57	977.75	1007.41	-835.68	-4547.63	116.25	4686.18	51.09	93.47	PASS	
1325.00†	1311.48	-121.25	88.76	1033.06	1062.61	-833.99	-4550.56	116.40	4700.34	51.20	93.54	PASS	
1425.00†	1409.33	-137.89	100.94	1071.72	1101.17	-832.70	-4553.06	116.51	4715.66	51.29	93.69	PASS	
1525.00†	1507.18	-154.53	113.12	1110.06	1139.36	-831.16	-4556.06	116.62	4732.27	51.37	93.86	PASS	
1625.00†	1605.03	-171.18	125.31	1180.26	1209.18	-827.57	-4562.32	116.83	4749.88	51.53	93.91	PASS	
1725.00†	1702.88	-187.82	137.49	1260.51	1288.88	-822.06	-4569.96	117.09	4767.99	51.72	93.92	PASS	
1825.00†	1800.73	-204.47	149.67	1322.63	1350.44	-816.67	-4576.21	117.30	4786.60	51.93	94.05	PASS	
1925.00†	1898.58	-221.11	161.86	1363.01	1390.42	-813.11	-4580.71	117.44	4806.31	51.64	94.35	PASS	
2025.00†	1996.43	-237.75	174.04	1419.49	1446.26	-808.25	-4587.65	117.64	4827.20	51.75	94.56	PASS	
2125.00†	2094.28	-254.40	186.22	1534.15	1559.45	-796.63	-4601.78	118.05	4848.20	52.03	94.45	PASS	
2225.00†	2192.13	-271.04	198.41	1640.04	1663.85	-784.56	-4614.72	118.44	4869.19	52.32	94.32	PASS	
2325.00†	2289.98	-287.68	210.59	1727.47	1750.06	-774.55	-4625.21	118.76	4890.15	52.58	94.25	PASS	
2425.00†	2387.83	-304.33	222.77	1806.10	1827.58	-765.60	-4634.91	119.04	4911.60	52.84	94.21	PASS	
2525.00†	2485.68	-320.97	234.96	1897.73	1917.93	-755.45	-4646.34	119.37	4933.38	53.15	94.05	PASS	
2625.00†	2583.53	-337.62	247.14	1980.31	1999.41	-746.73	-4656.58	119.66	4955.30	53.46	93.92	PASS	
2725.00†	2681.38	-354.26	259.33	2034.81	2053.18	-741.41	-4663.64	119.84	4977.96	53.69	93.95	PASS	
2825.00†	2779.23	-370.90	271.51	2152.19	2168.88	-729.25	-4679.23	120.24	5001.07	54.16	93.56	PASS	
2925.00†	2877.08	-387.55	283.69	2246.02	2261.36	-719.02	-4691.37	120.57	5023.97	54.56	93.27	PASS	
3025.00†	2974.93	-404.19	295.88	2348.53	2362.58	-709.47	-4704.39	120.90	5046.87	55.02	92.91	PASS	
3125.00†	3072.78	-420.83	308.06	2425.70	2438.81	-702.58	-4714.28	121.15	5070.02	55.40	92.69	PASS	
3225.00†	3170.63	-437.48	320.24	2506.19	2518.23	-694.84	-4724.84	121.40	5093.59	55.81	92.43	PASS	
3325.00†	3268.48	-454.12	332.43	2596.03	2606.72	-685.08	-4736.82	121.71	5117.47	56.28	92.08	PASS	
3425.00†	3366.33	-470.77	344.61	2673.40	2682.81	-675.68	-4747.27	121.97	5141.64	56.71	91.80	PASS	
3525.00†	3464.18	-487.41	356.79	2772.77	2780.41	-662.97	-4760.92	122.32	5166.17	57.26	91.34	PASS	
3625.00†	3562.03	-504.05	368.98	2878.03	2883.95	-650.26	-4775.03	122.68	5190.56	57.85	90.82	PASS	
3725.00†	3659.88	-520.70	381.16	2942.22	2947.09	-642.68	-4783.69	122.89	5215.23	58.28	90.58	PASS	
3825.00†	3757.73	-537.34	393.34	3013.71	3017.40	-634.63	-4793.83	123.12	5240.64	58.74	90.29	PASS	
3925.00†	3855.57	-553.98	405.53	3135.48	3137.36	-622.46	-4810.85	123.50	5266.04	59.45	89.63	PASS	
4025.00†	3953.42	-570.63	417.71	3250.03	3250.32	-611.38	-4826.29	123.85	5291.08	60.15	89.00	PASS	
4125.00†	4051.27	-587.27	429.90	3316.19	3315.54	-604.66	-4835.19	124.05	5316.27	60.63	88.71	PASS	
4225.00†	4149.12	-603.92	442.08	3388.42	3386.65	-597.21	-4845.40	124.27	5342.18	61.14	88.38	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 139 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. FRITZLER 0-2-21 AWP Offset Wellpath: EX. FRITZLER 0-2-21 AWP

Facility: SEC.21-T06N-66W				Slot: SLOT#05 EX. FRITZLER 0-2-21 (1706'FNL & 518'FWL, PR, NB/CD)				Well: EX. FRITZLER 0-2-21		Threshold Value=1.00		† = interpolated/extrapolated station	
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
4325.00†	4246.97	-620.56	454.26	3491.02	3487.75	-587.22	-4859.74	124.57	5368.07	61.83	87.82	PASS	
4425.00†	4344.82	-637.20	466.45	3573.74	3569.10	-577.87	-4871.46	124.83	5394.30	62.42	87.39	PASS	
4525.00†	4442.67	-653.85	478.63	3666.32	3660.17	-567.43	-4884.43	125.11	5420.54	63.09	86.89	PASS	
4625.00†	4540.52	-670.49	490.81	3721.37	3714.27	-561.05	-4892.41	125.28	5447.37	63.56	86.66	PASS	
4725.00†	4638.37	-687.13	503.00	3781.29	3773.05	-553.79	-4901.48	125.46	5474.94	64.07	86.40	PASS	
4825.00†	4736.22	-703.78	515.18	3853.06	3843.37	-544.91	-4912.72	125.69	5503.14	64.65	86.05	PASS	
4925.00†	4834.07	-720.42	527.36	3972.72	3960.58	-529.51	-4931.29	126.06	5531.40	65.52	85.34	PASS	
5025.00†	4931.92	-737.07	539.55	4914.83	4895.88	-464.00	-4999.78	128.36	5546.17	70.25	79.74	PASS	
5125.00†	5029.77	-753.71	551.73	4997.17	4978.22	-464.00	-5000.39	128.50	5559.92	70.91	79.19	PASS	
5225.00†	5127.62	-770.35	563.91	5071.72	5052.77	-463.92	-5001.24	128.62	5574.08	71.54	78.68	PASS	
5325.00†	5225.47	-787.00	576.10	5158.52	5139.55	-463.68	-5002.57	128.77	5588.69	72.23	78.13	PASS	
5425.00†	5323.32	-803.64	588.28	5348.22	5329.24	-465.01	-5003.78	129.07	5602.31	73.29	77.17	PASS	
5525.00†	5421.17	-820.28	600.47	5437.39	5418.40	-466.41	-5003.85	129.20	5615.47	73.99	76.62	PASS	
5625.00†	5519.02	-836.93	612.65	5531.28	5512.28	-468.11	-5004.07	129.34	5628.82	74.71	76.06	PASS	
5725.00†	5616.87	-853.57	624.83	5651.34	5632.32	-470.02	-5004.10	129.52	5642.01	75.53	75.40	PASS	
5825.00†	5714.72	-870.22	637.02	5753.74	5734.72	-471.30	-5003.81	129.67	5654.95	76.30	74.80	PASS	
5925.00†	5812.57	-886.86	649.20	5844.15	5825.11	-472.54	-5003.64	129.80	5668.01	77.03	74.25	PASS	
6025.00†	5910.42	-903.50	661.38	5934.24	5915.19	-473.93	-5003.60	129.94	5681.25	77.77	73.71	PASS	
6125.00†	6008.27	-920.15	673.57	6023.99	6004.93	-475.25	-5003.69	130.07	5694.67	78.52	73.17	PASS	
6225.00†	6106.12	-936.79	685.75	6116.58	6097.52	-476.53	-5003.91	130.20	5708.25	79.29	72.63	PASS	
6325.00†	6203.97	-953.43	697.93	6212.97	6193.90	-477.77	-5004.17	130.34	5721.91	80.08	72.08	PASS	
6425.00†	6301.82	-970.08	710.12	6303.12	6284.03	-478.84	-5004.45	130.47	5735.67	80.85	71.56	PASS	
6525.00†	6399.66	-986.72	722.30	6385.25	6366.16	-479.69	-5004.89	130.60	5749.69	81.60	71.07	PASS	
6605.93	6478.85	-1000.19	732.16	6451.65	6432.56	-480.29	-5005.40	130.69	5761.26	82.21	70.68	PASS	
6625.00†	6497.54	-1003.38	734.20	6469.20	6450.11	-480.44	-5005.56	123.40	5763.73	82.37	70.57	PASS	
6725.00†	6595.97	-1020.39	735.57	6564.46	6545.36	-481.27	-5006.45	74.86	5767.49	83.33	69.79	PASS	
6825.00†	6693.34	-1037.59	721.30	6652.25	6633.15	-482.10	-5007.33	44.53	5755.81	84.79	68.45	PASS	
6925.00†	6787.24	-1054.57	691.74	6707.96	6688.84	-482.82	-5008.18	32.12	5729.36	86.14	67.06	PASS	
7025.00†	6875.37	-1070.91	647.62	6760.80	6741.65	-483.77	-5009.35	26.52	5688.93	87.22	65.75	PASS	
7125.00†	6955.55	-1086.20	590.03	6809.58	6790.41	-484.87	-5010.77	23.98	5635.40	88.09	64.49	PASS	
7225.00†	7025.81	-1100.06	520.38	7036.87	7017.61	-488.77	-5015.02	24.07	5569.06	89.50	62.71	PASS	
7325.00†	7084.42	-1112.16	440.40	7111.24	7091.98	-489.16	-5015.07	25.56	5490.93	90.14	61.39	PASS	
7425.00†	7129.94	-1122.20	352.04	7168.35	7149.09	-489.27	-5014.94	29.64	5404.21	90.59	60.12	PASS	
7525.00†	7161.25	-1129.93	257.49	7206.56	7187.29	-489.26	-5014.77	39.07	5311.12	90.88	58.89	PASS	
7625.00†	7177.57	-1135.16	159.08	7223.09	7203.82	-489.23	-5014.69	63.72	5214.00	91.03	57.72	PASS	
7682.94	7180.00	-1136.99	101.24	7225.30	7206.03	-489.22	-5014.68	93.04	5156.83	91.08	57.06	PASS	
7725.00†	7179.88	-1138.00	59.19	7224.93	7205.66	-489.22	-5014.68	93.01	5115.24	91.10	56.58	PASS	
7825.00†	7179.59	-1140.39	-40.78	7224.07	7204.80	-489.23	-5014.68	92.95	5016.41	91.17	55.44	PASS	
7925.00†	7179.29	-1142.78	-140.75	7223.20	7203.93	-489.23	-5014.69	92.89	4917.62	91.27	54.30	PASS	
8025.00†	7179.00	-1145.17	-240.72	7222.34	7203.07	-489.23	-5014.69	92.82	4818.88	91.38	53.14	PASS	
8125.00†	7178.71	-1147.56	-340.69	7221.48	7202.21	-489.23	-5014.70	92.76	4720.20	91.51	51.97	PASS	
8225.00†	7178.42	-1149.95	-440.66	7220.62	7201.36	-489.23	-5014.70	92.69	4621.57	91.67	50.80	PASS	
8325.00†	7178.13	-1152.34	-540.63	7219.77	7200.50	-489.23	-5014.71	92.63	4523.00	91.86	49.61	PASS	
8425.00†	7177.84	-1154.73	-640.61	7218.92	7199.65	-489.24	-5014.71	92.57	4424.49	92.08	48.42	PASS	
8525.00†	7177.55	-1157.12	-740.58	7218.07	7198.80	-489.24	-5014.71	92.50	4326.06	92.33	47.21	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 140 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. FRITZLER 0-2-21 AWP Offset Wellpath: EX. FRITZLER 0-2-21 AWP

Facility: SEC.21-T06N-66W Slot: SLOT#05 EX. FRITZLER 0-2-21 (1706'FNL & 518'FWL, PR, NB/CD)						Well: EX. FRITZLER 0-2-21		Threshold Value=1.00		† = Interpolated/extrapolated station			
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
8625.00†	7177.25	-1159.52	-840.55	7217.22	7197.96	-489.24	-5014.72	92.44	4227.69	92.61	45.99	PASS	
8725.00†	7176.96	-1161.91	-940.52	7216.38	7197.11	-489.24	-5014.72	92.38	4129.41	92.94	44.76	PASS	
8825.00†	7176.67	-1164.30	-1040.49	7215.54	7196.27	-489.24	-5014.73	92.32	4031.21	93.31	43.52	PASS	
8925.00†	7176.38	-1166.69	-1140.46	7214.70	7195.43	-489.24	-5014.73	92.25	3933.10	93.73	42.27	PASS	
9025.00†	7176.09	-1169.08	-1240.43	7213.86	7194.60	-489.24	-5014.74	92.19	3835.09	94.21	41.01	PASS	
9125.00†	7175.80	-1171.47	-1340.40	7213.03	7193.76	-489.25	-5014.74	92.13	3737.18	94.74	39.74	PASS	
9225.00†	7175.51	-1173.86	-1440.37	7212.20	7192.93	-489.25	-5014.74	92.07	3639.39	95.34	38.45	PASS	
9325.00†	7175.21	-1176.25	-1540.34	7211.37	7192.10	-489.25	-5014.75	92.01	3541.72	96.01	37.16	PASS	
9425.00†	7174.92	-1178.64	-1640.32	7210.54	7191.27	-489.25	-5014.75	91.94	3444.18	96.76	35.85	PASS	
9525.00†	7174.63	-1181.03	-1740.29	7209.72	7190.45	-489.25	-5014.76	91.88	3346.79	97.60	34.53	PASS	
9625.00†	7174.34	-1183.42	-1840.26	7208.89	7189.63	-489.25	-5014.76	91.82	3249.55	98.54	33.21	PASS	
9725.00†	7174.05	-1185.82	-1940.23	7208.07	7188.81	-489.25	-5014.77	91.76	3152.49	99.59	31.87	PASS	
9825.00†	7173.76	-1188.21	-2040.20	7207.25	7187.99	-489.25	-5014.77	91.70	3055.62	100.75	30.53	PASS	
9925.00†	7173.47	-1190.60	-2140.17	7206.44	7187.17	-489.26	-5014.77	91.64	2958.96	102.05	29.19	PASS	
10025.00†	7173.17	-1192.99	-2240.14	7205.63	7186.36	-489.26	-5014.78	91.58	2862.52	103.50	27.84	PASS	
10125.00†	7172.88	-1195.38	-2340.11	7204.81	7185.55	-489.26	-5014.78	91.52	2766.34	105.11	26.49	PASS	
10225.00†	7172.59	-1197.77	-2440.08	7204.01	7184.74	-489.26	-5014.79	91.46	2670.44	106.89	25.14	PASS	
10325.00†	7172.30	-1200.16	-2540.05	7203.14	7183.87	-489.26	-5014.79	91.39	2574.85	108.88	23.80	PASS	
10425.00†	7172.01	-1202.55	-2640.03	7202.29	7183.02	-489.26	-5014.80	91.33	2479.60	111.09	22.46	PASS	
10525.00†	7171.72	-1204.94	-2740.00	7201.44	7182.17	-489.26	-5014.80	91.27	2384.75	113.55	21.13	PASS	
10625.00†	7171.42	-1207.33	-2839.97	7200.60	7181.33	-489.26	-5014.80	91.21	2290.34	116.28	19.81	PASS	
10725.00†	7171.13	-1209.72	-2939.94	7199.76	7180.50	-489.26	-5014.81	91.14	2196.41	119.32	18.51	PASS	
10825.00†	7170.84	-1212.11	-3039.91	7198.94	7179.67	-489.26	-5014.81	91.08	2103.05	122.71	17.23	PASS	
10925.00†	7170.55	-1214.51	-3139.88	7198.12	7178.86	-489.27	-5014.82	91.02	2010.33	126.48	15.98	PASS	
11025.00†	7170.26	-1216.90	-3239.85	7197.32	7178.05	-489.27	-5014.82	90.96	1918.34	130.69	14.75	PASS	
11125.00†	7169.97	-1219.29	-3339.82	7196.51	7177.25	-489.27	-5014.82	90.90	1827.19	135.39	13.56	PASS	
11225.00†	7169.68	-1221.68	-3439.79	7195.72	7176.45	-489.27	-5014.83	90.84	1737.01	140.64	12.41	PASS	
11325.00†	7169.38	-1224.07	-3539.76	7194.93	7175.67	-489.27	-5014.83	90.78	1647.97	146.51	11.30	PASS	
11425.00†	7169.09	-1226.46	-3639.74	7194.16	7174.89	-489.27	-5014.83	90.73	1560.25	153.07	10.24	PASS	
11525.00†	7168.80	-1228.85	-3739.71	7193.38	7174.12	-489.27	-5014.84	90.67	1474.10	160.43	9.22	PASS	
11625.00†	7168.51	-1231.24	-3839.68	7192.62	7173.35	-489.27	-5014.84	90.61	1389.80	168.66	8.27	PASS	
11725.00†	7168.22	-1233.63	-3939.65	7191.86	7172.59	-489.27	-5014.85	90.56	1307.72	177.86	7.38	PASS	
11825.00†	7167.93	-1236.02	-4039.62	7191.11	7171.84	-489.27	-5014.85	90.50	1228.30	188.13	6.55	PASS	
11925.00†	7167.64	-1238.41	-4139.59	7190.37	7171.10	-489.27	-5014.85	90.44	1152.09	199.54	5.79	PASS	
12025.00†	7167.34	-1240.81	-4239.56	7189.63	7170.36	-489.27	-5014.86	90.39	1079.76	212.12	5.10	PASS	
12125.00†	7167.05	-1243.20	-4339.53	7188.90	7169.63	-489.27	-5014.86	90.33	1012.16	225.83	4.49	PASS	
12225.00†	7166.76	-1245.59	-4439.50	7188.17	7168.91	-489.27	-5014.86	90.28	950.29	240.49	3.96	PASS	
12325.00†	7166.47	-1247.98	-4539.47	7187.46	7168.19	-489.27	-5014.86	90.23	895.34	255.75	3.51	PASS	
12425.00†	7166.18	-1250.37	-4639.45	7186.74	7167.48	-489.27	-5014.87	90.17	848.65	270.98	3.14	PASS	
12525.00†	7165.89	-1252.76	-4739.42	7186.04	7166.77	-489.27	-5014.87	90.12	811.66	285.27	2.85	PASS	
12625.00†	7165.60	-1255.15	-4839.39	7185.34	7166.07	-489.27	-5014.87	90.07	785.72	297.53	2.64	PASS	
12725.00†	7165.30	-1257.54	-4939.36	7184.65	7165.38	-489.27	-5014.88	90.02	771.97	306.62	2.52	PASS	
12783.13†	7165.13	-1258.93	-4997.47	7182.96	7163.70	-489.28	-5014.88	89.99	769.85	310.09	2.49	PASS	
12825.00†	7165.01	-1259.93	-5039.33	7183.96	7164.69	-489.27	-5014.88	89.97	771.04	311.70	2.48	PASS	
12832.05†	7164.99	-1260.10	-5046.38	7183.91	7164.64	-489.27	-5014.88	89.96	771.47	311.89	2.48	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 141 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: **EX. FRITZLER 0-2-21 AWB** Offset Wellpath: **EX. FRITZLER 0-2-21 AWP**

Facility: SEC.21-T06N-66W						Slot: SLOT#05 EX. FRITZLER 0-2-21 (1706'FNL & 518'FWL, PR, NB/CD)		Well: EX. FRITZLER 0-2-21		Threshold Value=1.00		† = interpolated/extrapolated station	
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
12925.00†	7164.72	-1262.32	-5139.30	7183.28	7164.01	-489.28	-5014.88	89.92	783.00	312.47	2.51	PASS	
13025.00†	7164.43	-1264.71	-5239.27	7182.60	7163.34	-489.28	-5014.89	89.87	807.25	309.25	2.61	PASS	
13125.00†	7164.14	-1267.10	-5339.24	7181.93	7162.67	-489.28	-5014.89	89.82	842.75	302.85	2.79	PASS	
13225.00†	7163.85	-1269.50	-5439.21	7181.27	7162.00	-489.28	-5014.89	89.77	888.14	294.25	3.02	PASS	
13325.00†	7163.56	-1271.89	-5539.18	7180.61	7161.35	-489.28	-5014.89	89.72	942.00	284.40	3.32	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: **EX. FRITZLER 0-2-21 AWB** Offset Wellpath: **EX. FRITZLER 0-2-21 AWP**

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

WELLPATH COMPOSITION - Offset Wellbore: **EX. FRITZLER 0-2-21 AWB** Offset Wellpath: **EX. FRITZLER 0-2-21 AWP**

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
0.00	7365.00	ISCWSA MWD, Rev. 4 (Standard)	ENSIGN DIRECTIONAL SURVEY FROM COGCC <740-7365>	EX. FRITZLER 0-2-21 AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: **EX. FRITZLER 0-2-21 AWB** Offset Wellpath: **EX. FRITZLER 0-2-21 AWP**

MD Reference: Rig on SLOT#05 EX. FRITZLER 0-2-21 (1706'FNL & 518'FWL, PR, NB/CD) (RT)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	0.00ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 142 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. GOETZEL 20-31 AWB Offset Wellpath: EX. GOETZEL 20-31 AWP

Facility: SEC.20-T06N-R66W Slot: SLOT#07 EX. GOETZEL 20-31 (1775'FSL & 2186'FWL, SI, CODL) Well: EX. GOETZEL 20-31 Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	-10.00	25.00	-2700.78	-8186.87	-108.26	8620.85	25.57	350.38	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: EX. GOETZEL 20-31 AWB Offset Wellpath: EX. GOETZEL 20-31 AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

WELLPATH COMPOSITION - Offset Wellbore: EX. GOETZEL 20-31 AWB Offset Wellpath: EX. GOETZEL 20-31 AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
0.00	7361.00	Drift Indicator - Inclination Only (Actual Survey)	ASASUMED VERTICAL TO TD FROM COGCC <7361>	EX. GOETZEL 20-31 AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: EX. GOETZEL 20-31 AWB Offset Wellpath: EX. GOETZEL 20-31 AWP

MD Reference: Rig on SLOT#07 GOETZEL 20-31 (1775'FSL & 2186'FWL, SI, CODL) (RT)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	4741.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 143 of 202

**BAKER
HUGHES**
a GE company



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. FRTIZLER 11-21 AWB Offset Wellpath: EX. FRTIZLER 11-21 AWP

Facility: SEC.21-T06N-66W		Slot: SLOT#02 EX. FRTIZLER 11-21 (736'FNL & 695'FWL, PR, NB/CD)		Well: EX. FRTIZLER 11-21		Threshold Value=1.00		† = interpolated/extrapolated station				
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status
25.00	25.00	0.00	0.00	2.00	25.00	198.22	-4393.27	-87.42	4397.74	50.17	89.35	PASS

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: EX. FRTIZLER 11-21 AWB Offset Wellpath: EX. FRTIZLER 11-21 AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

WELLPATH COMPOSITION - Offset Wellbore: EX. FRTIZLER 11-21 AWB Offset Wellpath: EX. FRTIZLER 11-21 AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
0.00	7340.00	Drift Indicator - Inclination Only (Actual Survey)	ASSUMED VERTICAL TO TD FROM COGCC <7340>	EX. FRTIZLER 11-21 AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: EX. FRTIZLER 11-21 AWB Offset Wellpath: EX. FRTIZLER 11-21 AWP

MD Reference: Rig on SLOT#02 EX. FRTIZLER 11-21 (736'FNL & 695'FWL, PR, NB/CD) (RT)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	0.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 144 of 202

**BAKER
HUGHES**
a GE company



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. LINDBLAD 20-21 AWB Offset Wellpath: EX. LINDBLAD 20-21 AWP

Facility: SEC.20-T06N-R66W Slot: SLOT#03 EX. LINDBLAD 20-21 (660'FNL & 1987'FWL, PR, CODL) Well: EX. LINDBLAD 20-21 Threshold Value=1.00 † = interpolated/extrapolated station												
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status
25.00	25.00	0.00	0.00	4.00	25.00	142.41	-8372.32	-89.03	8373.53	25.57	340.32	PASS

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: EX. LINDBLAD 20-21 AWB Offset Wellpath: EX. LINDBLAD 20-21 AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

WELLPATH COMPOSITION - Offset Wellbore: EX. LINDBLAD 20-21 AWB Offset Wellpath: EX. LINDBLAD 20-21 AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
0.00	7315.00	Drift Indicator - Inclination Only (Actual Survey)	ASSUMED VERTICAL TO TD FROM COGCC <7315>	EX. LINDBLAD 20-21 AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: EX. LINDBLAD 20-21 AWB Offset Wellpath: EX. LINDBLAD 20-21 AWP

MD Reference: Rig on SLOT#03 LINDBLAD 20-21 (660'FNL & 1987'FWL, PR, CODL) (RT)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	4755.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 145 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: LEFFLER 8C-23-L AWP Offset Wellpath: LEFFLER 8C-23-L AWP

Facility: SEC.21-T06N-R66W Slot: SLOT#09 LEFFLER 8C-23-L (1961'FNL & 275'FEL SEC.21) Well: LEFFLER 8C-23-L Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	22.00	25.00	-1023.75	-23.65	-178.68	1024.02	1.26	3410.20	PASS	
125.00†	125.00	0.00	0.00	142.28	145.26	-1022.16	-22.75	-178.73	1022.61	2.44	775.13	PASS	
225.00†	225.00	0.00	0.00	233.55	236.52	-1020.73	-22.16	-178.76	1021.03	3.18	495.21	PASS	
300.00	300.00	0.00	0.00	301.50	304.47	-1020.22	-22.10	-178.76	1020.47	3.58	414.87	PASS	
325.00†	325.00	-0.09	0.06	325.78	328.74	-1020.12	-22.11	37.45	1020.28	3.72	392.25	PASS	
425.00†	424.96	-2.20	1.61	422.60	425.57	-1019.91	-22.19	37.57	1017.98	4.46	304.69	PASS	
525.00†	524.77	-7.13	5.22	521.35	524.32	-1019.95	-22.47	37.85	1013.20	5.47	232.99	PASS	
625.00†	624.30	-14.86	10.88	618.64	621.60	-1020.03	-22.46	38.27	1005.73	6.32	193.52	PASS	
725.00†	723.44	-25.39	18.59	715.52	718.48	-1020.44	-22.56	38.85	995.91	7.10	166.45	PASS	
825.00†	822.07	-38.71	28.34	814.48	817.44	-1020.93	-22.68	39.62	983.56	7.85	146.04	PASS	
895.18	890.91	-49.71	36.39	884.20	887.16	-1021.22	-22.84	40.28	973.32	8.33	134.90	PASS	
925.00†	920.09	-54.67	40.02	913.81	916.78	-1021.33	-22.86	40.51	968.71	8.50	131.20	PASS	
1025.00†	1017.94	-71.32	52.20	1015.31	1018.27	-1021.48	-22.91	41.34	953.13	9.03	120.40	PASS	
1125.00†	1115.79	-87.96	64.39	1110.12	1113.08	-1021.58	-23.31	42.17	937.73	9.57	110.88	PASS	
1225.00†	1213.64	-104.60	76.57	1209.08	1212.03	-1021.75	-23.92	43.06	922.64	10.15	102.13	PASS	
1325.00†	1311.48	-121.25	88.76	1306.73	1309.69	-1021.82	-24.32	43.97	907.65	10.72	94.43	PASS	
1425.00†	1409.33	-137.89	100.94	1400.81	1403.76	-1022.20	-24.67	44.86	893.20	11.31	87.63	PASS	
1525.00†	1507.18	-154.53	113.12	1495.03	1497.99	-1022.91	-24.80	45.76	879.31	11.90	81.47	PASS	
1625.00†	1605.03	-171.18	125.31	1591.19	1594.14	-1024.20	-24.87	46.70	866.21	12.53	75.87	PASS	
1725.00†	1702.88	-187.82	137.49	1699.07	1702.01	-1025.11	-24.55	47.77	852.82	12.87	72.49	PASS	
1825.00†	1800.73	-204.47	149.67	1801.96	1804.90	-1024.94	-23.54	48.79	838.57	13.43	66.97	PASS	
1925.00†	1898.58	-221.11	161.86	1905.95	1908.88	-1024.41	-23.06	49.90	824.37	13.54	64.19	PASS	
2025.00†	1996.43	-237.75	174.04	2040.83	2043.39	-1018.02	-29.55	51.98	807.75	14.11	60.24	PASS	
2125.00†	2094.28	-254.40	186.22	2128.60	2130.38	-1010.35	-38.42	53.79	789.45	14.62	56.70	PASS	
2225.00†	2192.13	-271.04	198.41	2190.63	2191.81	-1006.23	-45.90	55.17	774.72	15.15	53.58	PASS	
2325.00†	2289.98	-287.68	210.59	2247.74	2248.45	-1005.43	-53.09	56.41	765.77	15.72	50.96	PASS	
2425.00†	2387.83	-304.33	222.77	2318.22	2318.51	-1008.21	-60.15	57.74	761.78	16.51	48.15	PASS	
2525.00†	2485.68	-320.97	234.96	2440.37	2440.20	-1015.93	-67.10	59.62	759.13	17.29	45.74	PASS	
2625.00†	2583.53	-337.62	247.14	2574.71	2573.98	-1015.97	-78.92	62.26	752.71	18.52	42.21	PASS	
2725.00†	2681.38	-354.26	259.33	2703.69	2702.19	-1008.66	-90.85	65.14	742.50	19.56	39.34	PASS	
2825.00†	2779.23	-370.90	271.51	2818.99	2816.63	-998.02	-99.97	67.86	729.84	20.40	37.03	PASS	
2925.00†	2877.08	-387.55	283.69	2923.26	2920.12	-987.12	-106.56	70.35	716.69	21.18	34.97	PASS	
3025.00†	2974.93	-404.19	295.88	3010.57	3006.74	-977.60	-111.78	72.50	704.27	21.95	33.11	PASS	
3125.00†	3072.78	-420.83	308.06	3092.36	3087.91	-969.67	-118.04	74.61	694.99	22.76	31.48	PASS	
3225.00†	3170.63	-437.48	320.24	3187.63	3182.53	-961.59	-125.67	77.07	688.23	23.63	29.99	PASS	
3325.00†	3268.48	-454.12	332.43	3283.43	3277.63	-952.67	-133.05	79.62	682.13	24.51	28.63	PASS	
3425.00†	3366.33	-470.77	344.61	3387.67	3381.13	-943.06	-140.80	82.42	677.42	25.43	27.38	PASS	
3525.00†	3464.18	-487.41	356.79	3483.02	3475.81	-933.56	-146.82	84.99	672.91	26.35	26.22	PASS	
3625.00†	3562.03	-504.05	368.98	3558.23	3550.46	-926.44	-152.65	87.06	671.30	27.22	25.30	PASS	
3725.00†	3659.88	-520.70	381.16	3631.86	3623.53	-921.26	-159.98	89.06	674.25	28.10	24.59	PASS	
3825.00†	3757.73	-537.34	393.34	3711.26	3702.33	-917.90	-169.16	91.12	681.40	29.01	24.06	PASS	
3925.00†	3855.57	-553.98	405.53	3799.56	3789.94	-915.69	-179.94	93.28	691.31	29.92	23.64	PASS	
4025.00†	3953.42	-570.63	417.71	3890.12	3879.80	-914.36	-191.15	95.37	703.05	30.81	23.33	PASS	
4125.00†	4051.27	-587.27	429.90	3983.62	3972.56	-914.17	-202.84	97.40	716.52	31.73	23.08	PASS	
4225.00†	4149.12	-603.92	442.08	4083.50	4071.67	-913.51	-215.16	99.51	730.62	32.70	22.82	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 146 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: LEFFLER 8C-23-L AWB Offset Wellpath: LEFFLER 8C-23-L AWP

Facility: SEC.21-T06N-R66W						Slot: SLOT#09 LEFFLER 8C-23-L (1961'FNL & 275'FEL SEC.21)		Well: LEFFLER 8C-23-L		Threshold Value=1.00 † = interpolated/extrapolated station					
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status			
4325.00†	4246.97	-620.56	454.26	4182.34	4169.78	-912.05	-227.12	101.57	745.12	33.66	22.59	PASS			
4425.00†	4344.82	-637.20	466.45	4280.00	4266.69	-909.65	-238.94	103.59	760.20	34.62	22.40	PASS			
4525.00†	4442.67	-653.85	478.63	4377.42	4363.36	-906.75	-250.61	105.56	775.91	35.58	22.23	PASS			
4625.00†	4540.52	-670.49	490.81	4485.95	4471.21	-904.00	-262.40	107.61	791.62	36.63	22.02	PASS			
4725.00†	4638.37	-687.13	503.00	4584.71	4569.50	-902.40	-271.83	109.31	807.12	37.63	21.84	PASS			
4825.00†	4736.22	-703.78	515.18	4688.64	4672.96	-899.31	-281.24	111.12	822.51	38.65	21.66	PASS			
4925.00†	4834.07	-720.42	527.36	4791.47	4775.34	-895.29	-290.05	112.90	837.97	39.66	21.49	PASS			
5025.00†	4931.92	-737.07	539.55	4893.28	4876.84	-892.64	-297.37	114.49	853.04	40.67	21.33	PASS			
5125.00†	5029.77	-753.71	551.73	5000.24	4983.57	-891.34	-304.21	116.00	868.17	41.72	21.15	PASS			
5225.00†	5127.62	-770.35	563.91	5145.02	5128.29	-891.71	-307.22	117.77	879.55	43.01	20.78	PASS			
5325.00†	5225.47	-787.00	576.10	5241.77	5225.04	-891.67	-307.20	118.91	889.48	43.99	20.53	PASS			
5425.00†	5323.32	-803.64	588.28	5339.57	5322.85	-891.74	-307.28	120.04	899.89	44.98	20.31	PASS			
5525.00†	5421.17	-820.28	600.47	5438.20	5421.47	-891.75	-307.28	121.15	910.56	45.96	20.11	PASS			
5625.00†	5519.02	-836.93	612.65	5535.14	5518.41	-891.78	-307.28	122.22	921.56	46.94	19.92	PASS			
5725.00†	5616.87	-853.57	624.83	5635.19	5618.46	-891.89	-307.25	123.29	932.88	47.94	19.73	PASS			
5825.00†	5714.72	-870.22	637.02	5729.95	5713.22	-892.00	-307.22	124.29	944.49	48.92	19.58	PASS			
5925.00†	5812.57	-886.86	649.20	5830.08	5813.35	-892.08	-307.25	125.31	956.47	49.93	19.42	PASS			
6025.00†	5910.42	-903.50	661.38	5926.99	5910.26	-892.08	-307.23	126.28	968.68	50.92	19.28	PASS			
6125.00†	6008.27	-920.15	673.57	6024.86	6008.13	-892.10	-307.24	127.24	981.21	51.91	19.15	PASS			
6225.00†	6106.12	-936.79	685.75	6122.46	6105.73	-892.13	-307.27	128.17	994.03	52.91	19.03	PASS			
6325.00†	6203.97	-953.43	697.93	7934.13	7195.05	-900.21	686.69	-174.95	992.58	41.84	24.11	PASS			
6425.00†	6301.82	-970.08	710.12	7947.07	7195.20	-900.22	699.63	-172.39	896.17	42.53	21.41	PASS			
6525.00†	6399.66	-986.72	722.30	7960.03	7195.35	-900.22	712.59	-169.70	800.44	43.40	18.73	PASS			
6605.93	6478.85	-1000.19	732.16	7970.53	7195.48	-900.20	723.08	-167.43	723.63	44.32	16.57	PASS			
6625.00†	6497.54	-1003.38	734.20	7972.58	7195.51	-900.20	725.13	-169.57	705.61	44.58	16.07	PASS			
6725.00†	6595.97	-1020.39	735.57	7974.89	7195.54	-900.19	727.44	167.07	611.55	46.20	13.43	PASS			
6825.00†	6693.34	-1037.59	721.30	7962.47	7195.38	-900.22	715.02	152.61	520.54	48.53	10.87	PASS			
6925.00†	6787.24	-1054.57	691.74	7934.79	7195.06	-900.21	687.35	147.08	436.08	51.99	8.49	PASS			
7025.00†	6875.37	-1070.91	647.62	7892.85	7194.60	-900.03	645.41	142.28	362.09	57.05	6.41	PASS			
7125.00†	6955.55	-1086.20	590.03	7836.30	7193.98	-899.57	588.86	135.73	302.79	63.73	4.79	PASS			
7225.00†	7025.81	-1100.06	520.38	7768.12	7193.08	-898.86	520.69	127.12	261.65	70.90	3.72	PASS			
7325.00†	7084.42	-1112.16	440.40	7690.74	7192.21	-897.69	443.32	116.97	240.05	76.44	3.16	PASS			
7413.59†	7125.45	-1121.17	362.48	7616.11	7191.45	-895.85	368.73	107.86	234.87	79.05	2.99	PASS			
7425.00†	7129.94	-1122.20	352.04	7604.97	7191.31	-895.51	357.59	106.63	234.92	79.14	2.99	PASS			
7459.49†	7142.39	-1125.14	320.02	7569.54	7190.26	-894.67	322.19	102.89	235.39	79.39	2.98	PASS			
7525.00†	7161.25	-1129.93	257.49	7504.46	7185.75	-894.00	257.27	96.67	237.20	79.68	2.99	PASS			
7625.00†	7177.57	-1135.16	159.08	7413.62	7171.26	-892.15	167.68	88.89	243.25	79.68	3.07	PASS			
7682.94	7180.00	-1136.99	101.24	7361.26	7157.23	-890.53	117.27	84.70	248.03	79.49	3.14	PASS			
7725.00†	7179.88	-1138.00	59.19	7324.81	7144.82	-889.26	83.03	81.94	252.32	79.33	3.20	PASS			
7825.00†	7179.59	-1140.39	-40.78	7244.75	7110.70	-885.86	10.75	74.75	268.68	78.49	3.45	PASS			
7925.00†	7179.29	-1142.78	-140.75	7172.86	7072.01	-882.82	-49.71	67.35	295.60	77.05	3.86	PASS			
8025.00†	7179.00	-1145.17	-240.72	7109.71	7032.28	-880.60	-98.72	60.60	334.20	75.24	4.47	PASS			
8125.00†	7178.71	-1147.56	-340.69	7056.95	6995.64	-879.08	-136.62	55.12	383.72	73.63	5.25	PASS			
8225.00†	7178.42	-1149.95	-440.66	7014.14	6963.63	-877.66	-165.01	50.93	443.02	72.54	6.16	PASS			
8325.00†	7178.13	-1152.34	-540.63	6976.20	6933.67	-876.21	-188.22	47.47	510.10	71.64	7.18	PASS			

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 147 of 202

**BAKER
HUGHES**
a GE company



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: LEFFLER 8C-23-L AWB Offset Wellpath: LEFFLER 8C-23-L AWP

Facility: SEC.21-T06N-R66W Slot: SLOT#09 LEFFLER 8C-23-L (1961'FNL & 275'FEL SEC.21) Well: LEFFLER 8C-23-L Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
8425.00†	7177.84	-1154.73	-640.61	6939.86	6903.74	-875.23	-208.81	44.34	582.84	72.17	8.15	PASS	
8525.00†	7177.55	-1157.12	-740.58	6908.61	6877.14	-874.91	-225.19	41.79	659.93	70.81	9.40	PASS	
8625.00†	7177.25	-1159.52	-840.55	6882.40	6854.24	-875.06	-237.94	39.73	740.53	70.28	10.63	PASS	
8725.00†	7176.96	-1161.91	-940.52	6860.52	6834.70	-875.67	-247.73	38.06	824.02	69.99	11.88	PASS	
8825.00†	7176.67	-1164.30	-1040.49	6841.77	6817.65	-876.56	-255.51	36.66	909.88	69.77	13.16	PASS	
8925.00†	7176.38	-1166.69	-1140.46	6825.56	6802.72	-877.59	-261.74	35.46	997.67	69.60	14.47	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: LEFFLER 8C-23-L AWB Offset Wellpath: LEFFLER 8C-23-L AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: LEFFLER 8C-23-L AWB Offset Wellpath: LEFFLER 8C-23-L AWP

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
13.5in Open Hole	25.00	1821.00	1796.00	28.00	1823.93	-624.08	-14.42	-624.42	-14.33

WELLPATH COMPOSITION - Offset Wellbore: LEFFLER 8C-23-L AWB Offset Wellpath: LEFFLER 8C-23-L AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
25.00	1761.00	Custom BHI NaviTrak (Standard Rotating+Axial Corr) (Rockies 0.03Gt model)	BHI NAVITRAK W/EM 13.5"(STD ROTATING, AXIAL, ROCKIES GT)<112-1761>	LEFFLER 8C-23-L AWB
1761.00	17771.00	Custom BHI AutoTrak Curve (IFR1, Short) (Rockies 0.03Gt model)	CUSTOM BHI AUTTRAK CURVE (IFR1, SHORT) (ROCKIES 0.03GT MODEL) <1884'-17771'>	LEFFLER 8C-23-L AWB
17771.00	17795.00	Blind Drilling (std)	Projection to bit	LEFFLER 8C-23-L AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: LEFFLER 8C-23-L AWB Offset Wellpath: LEFFLER 8C-23-L AWP

MD Reference: PRECISION 562 (25') (RKB)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	25.00ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 148 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. BATES 20-22 AWB Offset Wellpath: EX. BATES 20-22 AWP

Facility: SEC.20-T06N-R66W Slot: SLOT#06 EX. BATES 20-22 (471'FNL & 663'FWL, PR, CODL) Well: EX. BATES 20-22 Threshold Value=1.00 † = interpolated/extrapolated station												
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status
25.00	25.00	0.00	0.00	29.00	25.00	497.01	-9690.83	-87.06	9703.57	25.57	394.39	PASS

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: EX. BATES 20-22 AWB Offset Wellpath: EX. BATES 20-22 AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

WELLPATH COMPOSITION - Offset Wellbore: EX. BATES 20-22 AWB Offset Wellpath: EX. BATES 20-22 AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
0.00	7365.00	Drift Indicator - Inclination Only (Actual Survey)	ASSUMED VERTICAL TO TD FROM COGCC <7365>	EX. BATES 20-22 AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: EX. BATES 20-22 AWB Offset Wellpath: EX. BATES 20-22 AWP

MD Reference: Rig on SLOT#06 BATES 20-22 (471'FNL & 663'FWL, PR, CODL) (RT)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	4780.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 149 of 202

**BAKER
HUGHES**
a GE company



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. CARLSON #18-44 AWB Offset Wellpath: EX. CARLSON #18-44 AWP

Facility: SEC.18-T06N-R66W		Slot: SLOT#01 EX. CARLSON #18-44 (531'FSL & 918'FEL, PR, NB/CD)		Well: EX. CARLSON #18-44		Threshold Value=1.00 † = interpolated/extrapolated station						
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status
25.00	25.00	0.00	0.00	53.00	25.00	1238.34	-11278.69	-83.73	11346.47	50.28	230.07	PASS

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: EX. CARLSON #18-44 AWB Offset Wellpath: EX. CARLSON #18-44 AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

WELLPATH COMPOSITION - Offset Wellbore: EX. CARLSON #18-44 AWB Offset Wellpath: EX. CARLSON #18-44 AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
0.00	7315.00	Drift Indicator - Inclination Only (Actual Survey)	ASSUMED VERTICAL TO TD FROM COGCC <7315>	EX. CARLSON #18-44 AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: EX. CARLSON #18-44 AWB Offset Wellpath: EX. CARLSON #18-44 AWP

MD Reference: Rig on SLOT#01 EX. CARLSON #18-44 (531'FSL & 918'FEL, PR, NB/CD) (RT)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	0.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 150 of 202

**BAKER
HUGHES**
a GE company



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: HOOD 11N-22B-M AWB Offset Wellpath: HOOD 11N-22B-M AWP

Facility: SEC.20-T06N-R66W Slot: SLOT#03 HOOD 11N-22B-M (725'FSL & 1122'FEL SEC.20) Well: HOOD 11N-22B-M Threshold Value=1.00 † = interpolated/extrapolated station												
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status
25.00	25.00	0.00	0.00	8.00	25.00	-3722.87	-6165.26	-121.13	7202.09	25.57	292.71	PASS

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: HOOD 11N-22B-M AWB Offset Wellpath: HOOD 11N-22B-M AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: HOOD 11N-22B-M AWB Offset Wellpath: HOOD 11N-22B-M AWP

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
13.5in Open Hole	25.00	1757.00	1732.00	42.00	1756.59	-2268.99	-3758.62	-2221.80	-3736.97
9.625in Open Hole	25.00	1757.00	1732.00	42.00	1756.59	-2268.99	-3758.62	-2221.80	-3736.97
8.5in Open Hole	1757.00	15343.00	13586.00	1756.59	7021.57	-2221.80	-3736.97	-1827.05	-1006.68

WELLPATH COMPOSITION - Offset Wellbore: HOOD 11N-22B-M AWB Offset Wellpath: HOOD 11N-22B-M AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
25.00	1707.00	Custom BHI NaviTrak (Standard Rotating+Axial Corr) (Rockies 0.03Gt model)	BHI NAVITRAK 13.5" (STD ROTATING, AXIAL, ROCKIES GT)<109-1707>	HOOD 11N-22B-M AWB
1707.00	15319.00	Custom BHI AutoTrak Curve (IFR1, Short) (Rockies 0.03Gt model)	BHI ATC 8.5" (IFR, SHORT, ROCKIES GT)<1794-15319>	HOOD 11N-22B-M AWB
15319.00	15343.00	Blind Drilling (std)	Projection to bit	HOOD 11N-22B-M AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: HOOD 11N-22B-M AWB Offset Wellpath: HOOD 11N-22B-M AWP

MD Reference: PRECISION 562 (25') (RKB)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	25.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 151 of 202

**BAKER
HUGHES**
a GE company



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. ENGLISH 31-20 AWB Offset Wellpath: EX. ENGLISH 31-20 AWP

Facility: SEC.20-T06N-R66W				Slot: SLOT#01 EX. ENGLISH 31-20 (200'FNL & 2440'FEL, SI, CODL)			Well: EX. ENGLISH 31-20		Threshold Value=1.00		† = interpolated/extrapolated station		
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	5.00	25.00	601.53	-7496.69	-85.41	7520.79	25.57	305.66	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: EX. ENGLISH 31-20 AWB Offset Wellpath: EX. ENGLISH 31-20 AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

WELLPATH COMPOSITION - Offset Wellbore: EX. ENGLISH 31-20 AWB Offset Wellpath: EX. ENGLISH 31-20 AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
0.00	7289.00	Drift Indicator - Inclination Only (Actual Survey)	ASSUMED VERTICAL TO TD FROM COGCC <7289>	EX. ENGLISH 31-20 AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: EX. ENGLISH 31-20 AWB Offset Wellpath: EX. ENGLISH 31-20 AWP

MD Reference: Rig on SLOT#01 ENGLISH 31-20 (200'FNL & 2440'FEL, SI, CODL) (RT)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	4756.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 152 of 202

**BAKER
HUGHES**
a GE company



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: HOOD 11N-22A-M AWB Offset Wellpath: HOOD 11N-22A-M AWP

Facility: SEC.20-T06N-R66W Slot: SLOT#04 HOOD 11N-22A-M (705'FSL & 1122'FEL SEC.20) Well: HOOD 11N-22A-M Threshold Value=1.00 † = interpolated/extrapolated station												
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status
25.00	25.00	0.00	0.00	8.00	25.00	-3742.91	-6164.95	-121.26	7212.21	25.57	293.12	PASS

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: HOOD 11N-22A-M AWB Offset Wellpath: HOOD 11N-22A-M AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: HOOD 11N-22A-M AWB Offset Wellpath: HOOD 11N-22A-M AWP

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
13.5in Open Hole	25.00	1763.00	1738.00	42.00	1767.40	-2281.21	-3758.44	-2244.76	-3740.10
9.625in Casing Intermediate	25.00	1763.00	1738.00	42.00	1767.40	-2281.21	-3758.44	-2244.76	-3740.10
8.5in Open Hole	1763.00	15220.00	13457.00	1767.40	6972.74	-2244.76	-3740.10	-1907.87	-1007.84

WELLPATH COMPOSITION - Offset Wellbore: HOOD 11N-22A-M AWB Offset Wellpath: HOOD 11N-22A-M AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
25.00	1712.00	Custom BHI NaviTrak (Standard Rotating+Axial Corr) (Rockies 0.03Gt model)	BHI NAVITRAK 13.5 (STD ROTATING, AXIAL, ROCKIES GT)<109-1712>	HOOD 11N-22A-M AWB
1712.00	15196.00	Custom BHI AutoTrak Curve (IFR1, Short) (Rockies 0.03Gt model)	BHI ATC 8.5" (IFR, SHORT, ROCKIES GT)<1792-15196>	HOOD 11N-22A-M AWB
15196.00	15220.00	Blind Drilling (std)	Projection to bit	HOOD 11N-22A-M AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: HOOD 11N-22A-M AWB Offset Wellpath: HOOD 11N-22A-M AWP

MD Reference: PRECISION 562 (25') (RKB)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	25.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 153 of 202

**BAKER
HUGHES**
a GE company



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: HOOD 11C-22-M AWB Offset Wellpath: HOOD 11C-22-M AWP

Facility: SEC.20-T06N-R66W Slot: SLOT#05 HOOD 11C-22-M (685'FSL & 1122'FEL SEC.20) Well: HOOD 11C-22-M Threshold Value=1.00 † = interpolated/extrapolated station												
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status
25.00	25.00	0.00	0.00	8.00	25.00	-3762.94	-6164.96	-121.40	7222.63	25.57	293.54	PASS

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: HOOD 11C-22-M AWB Offset Wellpath: HOOD 11C-22-M AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: HOOD 11C-22-M AWB Offset Wellpath: HOOD 11C-22-M AWP

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
13.5in Open Hole	25.00	1761.00	1736.00	42.00	1770.70	-2293.42	-3758.44	-2269.20	-3743.16
9.625in Casing Surface	25.00	1761.00	1736.00	42.00	1770.70	-2293.42	-3758.44	-2269.20	-3743.16
8.5in Open Hole	1761.00	15473.00	13712.00	1770.70	7197.80	-2269.20	-3743.16	-1976.60	-1003.87

WELLPATH COMPOSITION - Offset Wellbore: HOOD 11C-22-M AWB Offset Wellpath: HOOD 11C-22-M AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
25.00	1712.00	Custom BHI NaviTrak (Standard Rotating+Axial Corr) (Rockies 0.03Gt model)	BHI NAVITRAK 13.5 (STD ROTATING, AXIAL, ROCKIES GT)<109-1712>	HOOD 11C-22-M AWB
1712.00	15449.00	Custom BHI AutoTrak Curve (IFR1, Short) (Rockies 0.03Gt model)	BHI ATC 8.5 (IFR, SHORT, ROCKIES GT)<1794-15449>	HOOD 11C-22-M AWB
15449.00	15473.00	Blind Drilling (std)	Projection to bit	HOOD 11C-22-M AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: HOOD 11C-22-M AWB Offset Wellpath: HOOD 11C-22-M AWP

MD Reference: PRECISION 562 (25') (RKB)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	25.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 154 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: LEFFLER 8N-23C-L AWB Offset Wellpath: LEFFLER 8N-23C-L AWP

Facility: SEC.21-T06N-R66W		Slot: SLOT#11 LEFFLER 8N-23C-L (2001'FNL & 275'FEL SEC.21)		Well: LEFFLER 8N-23C-L		Threshold Value=1.00 † = interpolated/extrapolated station							
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	22.00	25.00	-1063.83	-23.65	-178.73	1064.09	1.26	3543.75	PASS	
125.00†	125.00	0.00	0.00	137.34	140.34	-1062.75	-23.30	-178.74	1063.11	2.27	924.12	PASS	
225.00†	225.00	0.00	0.00	232.72	235.70	-1061.65	-22.70	-178.78	1061.95	2.95	580.22	PASS	
300.00	300.00	0.00	0.00	304.57	307.55	-1060.95	-22.43	-178.79	1061.22	3.34	477.79	PASS	
325.00†	325.00	-0.09	0.06	324.48	327.46	-1060.86	-22.41	37.42	1061.01	3.40	466.82	PASS	
425.00†	424.96	-2.20	1.61	401.66	404.63	-1061.42	-22.71	37.52	1059.69	4.29	334.33	PASS	
525.00†	524.77	-7.13	5.22	472.34	475.27	-1063.72	-23.88	37.74	1058.15	5.43	245.65	PASS	
625.00†	624.30	-14.86	10.88	556.67	559.40	-1068.16	-27.40	38.22	1056.00	6.57	193.62	PASS	
725.00†	723.44	-25.39	18.59	640.18	642.58	-1073.73	-32.34	38.88	1052.68	7.35	168.92	PASS	
825.00†	822.07	-38.71	28.34	729.88	731.88	-1080.82	-36.96	39.69	1048.05	8.10	150.19	PASS	
895.18	890.91	-49.71	36.39	805.64	807.31	-1086.97	-40.32	40.43	1043.45	8.59	139.69	PASS	
925.00†	920.09	-54.67	40.02	838.24	839.79	-1089.43	-41.69	40.73	1041.08	8.76	136.22	PASS	
1025.00†	1017.94	-71.32	52.20	938.78	939.94	-1096.70	-46.80	41.74	1033.10	9.29	126.39	PASS	
1125.00†	1115.79	-87.96	64.39	1039.85	1040.62	-1103.57	-52.32	42.79	1025.05	9.84	117.53	PASS	
1225.00†	1213.64	-104.60	76.57	1135.16	1135.56	-1110.17	-57.53	43.79	1017.47	10.39	109.65	PASS	
1325.00†	1311.48	-121.25	88.76	1234.16	1234.17	-1117.07	-62.93	44.84	1010.27	10.98	102.42	PASS	
1425.00†	1409.33	-137.89	100.94	1343.02	1342.66	-1124.30	-68.26	45.99	1003.04	11.60	95.69	PASS	
1525.00†	1507.18	-154.53	113.12	1443.85	1443.23	-1129.98	-72.75	47.05	995.06	12.25	89.33	PASS	
1625.00†	1605.03	-171.18	125.31	1546.67	1545.79	-1135.63	-77.44	48.16	987.31	12.87	83.94	PASS	
1725.00†	1702.88	-187.82	137.49	1646.97	1645.86	-1140.75	-81.65	49.24	979.46	13.50	79.04	PASS	
1825.00†	1800.73	-204.47	149.67	1743.02	1741.68	-1145.63	-86.18	50.33	972.06	13.76	75.59	PASS	
1925.00†	1898.58	-221.11	161.86	1839.93	1838.39	-1150.27	-90.46	51.42	964.69	13.76	73.89	PASS	
2025.00†	1996.43	-237.75	174.04	1927.80	1926.00	-1155.34	-94.93	52.45	958.78	13.98	72.22	PASS	
2125.00†	2094.28	-254.40	186.22	2023.13	2021.02	-1161.51	-99.40	53.54	953.84	14.28	70.24	PASS	
2225.00†	2192.13	-271.04	198.41	2121.04	2118.62	-1168.19	-103.31	54.62	949.38	14.65	68.04	PASS	
2325.00†	2289.98	-287.68	210.59	2217.39	2214.67	-1174.86	-107.09	55.70	945.34	15.10	65.64	PASS	
2425.00†	2387.83	-304.33	222.77	2317.19	2314.15	-1181.88	-111.00	56.81	941.77	15.63	63.07	PASS	
2525.00†	2485.68	-320.97	234.96	2411.94	2408.59	-1188.51	-114.76	57.89	938.55	16.21	60.49	PASS	
2625.00†	2583.53	-337.62	247.14	2508.83	2505.14	-1195.47	-119.00	59.01	936.01	16.86	57.91	PASS	
2725.00†	2681.38	-354.26	259.33	2609.03	2604.99	-1202.63	-123.33	60.17	933.80	17.57	55.34	PASS	
2825.00†	2779.23	-370.90	271.51	2709.24	2704.85	-1209.30	-128.20	61.38	931.78	18.32	52.85	PASS	
2925.00†	2877.08	-387.55	283.69	2808.29	2803.56	-1215.16	-133.96	62.65	929.94	19.12	50.47	PASS	
3025.00†	2974.93	-404.19	295.88	2906.03	2900.97	-1221.22	-139.29	63.88	928.64	19.94	48.24	PASS	
3125.00†	3072.78	-420.83	308.06	3005.27	2999.89	-1227.80	-143.50	65.06	927.58	20.81	46.12	PASS	
3225.00†	3170.63	-437.48	320.24	3104.07	3098.40	-1234.44	-147.54	66.22	926.92	21.69	44.14	PASS	
3325.00†	3268.48	-454.12	332.43	3203.74	3197.76	-1240.57	-152.24	67.44	926.50	22.61	42.28	PASS	
3425.00†	3366.33	-470.77	344.61	3302.59	3296.31	-1246.03	-157.65	68.72	926.39	23.54	40.54	PASS	
3525.00†	3464.18	-487.41	356.79	3404.18	3397.60	-1250.99	-163.72	70.07	926.52	24.50	38.90	PASS	
3625.00†	3562.03	-504.05	368.98	3498.15	3491.28	-1255.34	-169.65	71.35	927.12	25.45	37.44	PASS	
3725.00†	3659.88	-520.70	381.16	3592.39	3585.22	-1260.80	-174.75	72.55	928.64	26.42	36.10	PASS	
3825.00†	3757.73	-537.34	393.34	3692.20	3684.72	-1267.64	-178.88	73.71	930.65	27.41	34.82	PASS	
3925.00†	3855.57	-553.98	405.53	3790.51	3782.71	-1274.66	-182.30	74.81	932.86	28.42	33.64	PASS	
4025.00†	3953.42	-570.63	417.71	3885.67	3877.55	-1281.44	-186.07	75.90	935.71	29.41	32.57	PASS	
4125.00†	4051.27	-587.27	429.90	3983.69	3975.24	-1287.89	-190.77	77.06	939.08	30.44	31.57	PASS	
4225.00†	4149.12	-603.92	442.08	4087.64	4078.87	-1293.97	-196.29	78.34	942.67	31.50	30.60	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 155 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: LEFFLER 8N-23C-L AWB Offset Wellpath: LEFFLER 8N-23C-L AWP

Facility: SEC.21-T06N-R66W Slot: SLOT#11 LEFFLER 8N-23C-L (2001'FNL & 275'FEL SEC.21) Well: LEFFLER 8N-23C-L Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
4325.00†	4246.97	-620.56	454.26	4184.72	4175.69	-1298.98	-201.32	79.55	946.11	32.53	29.71	PASS	
4425.00†	4344.82	-637.20	466.45	4280.33	4271.01	-1304.91	-205.79	80.67	950.36	33.56	28.91	PASS	
4525.00†	4442.67	-653.85	478.63	4378.72	4369.10	-1311.22	-210.29	81.80	955.07	34.60	28.16	PASS	
4625.00†	4540.52	-670.49	490.81	4476.54	4466.61	-1317.39	-214.82	82.92	960.14	35.65	27.46	PASS	
4725.00†	4638.37	-687.13	503.00	4573.87	4563.65	-1323.29	-219.63	84.04	965.64	36.70	26.81	PASS	
4825.00†	4736.22	-703.78	515.18	4672.83	4662.32	-1328.37	-225.23	85.24	971.49	37.76	26.20	PASS	
4925.00†	4834.07	-720.42	527.36	4769.66	4758.85	-1332.23	-231.72	86.48	977.84	38.81	25.64	PASS	
5025.00†	4931.92	-737.07	539.55	4868.08	4856.98	-1336.07	-238.13	87.73	984.48	39.88	25.12	PASS	
5125.00†	5029.77	-753.71	551.73	4962.40	4951.02	-1340.69	-243.95	88.85	991.89	40.92	24.65	PASS	
5225.00†	5127.62	-770.35	563.91	5063.56	5051.86	-1346.32	-249.62	89.99	999.66	42.00	24.19	PASS	
5325.00†	5225.47	-787.00	576.10	5162.51	5150.53	-1351.75	-254.80	91.08	1007.44	43.08	23.76	PASS	
5425.00†	5323.32	-803.64	588.28	5264.50	5252.22	-1357.58	-259.87	92.16	1015.52	44.17	23.35	PASS	
5525.00†	5421.17	-820.28	600.47	5366.74	5354.17	-1364.05	-263.92	93.17	1023.39	45.26	22.95	PASS	
5625.00†	5519.02	-836.93	612.65	5467.47	5454.62	-1370.70	-267.42	94.12	1031.29	46.35	22.58	PASS	
5725.00†	5616.87	-853.57	624.83	5568.69	5556.69	-1378.92	-269.57	95.11	1038.40	47.53	22.16	PASS	
5825.00†	5714.72	-870.22	637.02	5680.47	5667.02	-1386.37	-270.37	95.90	1045.00	48.61	21.80	PASS	
5925.00†	5812.57	-886.86	649.20	5774.34	5760.61	-1393.52	-271.50	96.64	1052.19	49.66	21.48	PASS	
6025.00†	5910.42	-903.50	661.38	5863.86	5849.87	-1400.21	-273.14	97.37	1060.06	50.68	21.20	PASS	
6125.00†	6008.27	-920.15	673.57	5949.38	5935.08	-1406.96	-275.72	98.06	1069.34	51.67	20.97	PASS	
6225.00†	6106.12	-936.79	685.75	6038.34	6023.71	-1413.59	-279.62	98.82	1079.85	52.69	20.76	PASS	
6325.00†	6203.97	-953.43	697.93	7850.60	7098.87	-1454.84	710.38	52.63	1025.87	51.35	20.24	PASS	
6425.00†	6301.82	-970.08	710.12	7859.57	7098.90	-1454.60	719.35	51.28	932.84	53.25	17.74	PASS	
6525.00†	6399.66	-986.72	722.30	7868.71	7098.93	-1454.41	728.48	49.88	841.27	55.55	15.33	PASS	
6605.93	6478.85	-1000.19	732.16	7876.22	7098.95	-1454.29	735.99	48.71	768.59	57.78	13.45	PASS	
6625.00†	6497.54	-1003.38	734.20	7877.79	7098.95	-1454.27	737.56	37.95	751.67	58.36	13.02	PASS	
6725.00†	6595.97	-1020.39	735.57	7878.93	7098.96	-1454.26	738.70	-27.05	664.27	61.67	10.89	PASS	
6825.00†	6693.34	-1037.59	721.30	7867.94	7098.92	-1454.42	727.71	-68.94	581.62	65.51	8.97	PASS	
6925.00†	6787.24	-1054.57	691.74	7844.77	7098.85	-1455.03	704.55	-87.89	507.58	69.82	7.33	PASS	
7025.00†	6875.37	-1070.91	647.62	7809.73	7098.74	-1456.66	669.56	-96.15	446.30	74.18	6.06	PASS	
7125.00†	6955.55	-1086.20	590.03	7759.55	7098.58	-1460.26	619.51	-98.03	401.56	77.89	5.19	PASS	
7225.00†	7025.81	-1100.06	520.38	7694.76	7098.38	-1465.97	554.97	-95.75	374.64	80.11	4.71	PASS	
7325.00†	7084.42	-1112.16	440.40	7611.89	7098.28	-1473.56	472.44	-90.60	363.08	80.48	4.54	PASS	
7372.26†	7107.64	-1117.18	399.56	7559.38	7098.33	-1477.37	420.08	-87.18	360.89	80.20	4.53	PASS	
7425.00†	7129.94	-1122.20	352.04	7504.28	7098.29	-1479.70	365.03	-84.00	359.13	79.63	4.54	PASS	
7460.94†	7142.88	-1125.26	318.66	7473.47	7097.41	-1480.79	334.25	-82.34	358.77	78.29	4.62	PASS	
7525.00†	7161.25	-1129.93	257.49	7413.89	7093.12	-1482.88	274.87	-79.16	359.89	78.87	4.60	PASS	
7625.00†	7177.57	-1135.16	159.08	7316.39	7076.42	-1483.56	178.90	-73.97	363.33	77.96	4.69	PASS	
7682.94	7180.00	-1136.99	101.24	7262.65	7061.55	-1482.21	127.29	-71.08	365.90	77.56	4.75	PASS	
7725.00†	7179.88	-1138.00	59.19	7227.25	7049.45	-1480.72	94.06	-69.19	368.36	77.39	4.79	PASS	
7825.00†	7179.59	-1140.39	-40.78	7151.38	7016.71	-1476.47	25.81	-64.22	379.36	76.86	4.97	PASS	
7925.00†	7179.29	-1142.78	-140.75	7084.87	6980.83	-1471.52	-29.93	-59.04	399.68	76.04	5.30	PASS	
8025.00†	7179.00	-1145.17	-240.72	7031.56	6947.50	-1466.96	-71.25	-54.54	431.12	75.20	5.78	PASS	
8125.00†	7178.71	-1147.56	-340.69	6986.95	6916.53	-1463.12	-103.11	-50.70	474.09	74.35	6.43	PASS	
8225.00†	7178.42	-1149.95	-440.66	6943.77	6884.47	-1459.57	-131.80	-47.07	526.94	73.47	7.23	PASS	
8325.00†	7178.13	-1152.34	-540.63	6905.03	6854.45	-1456.70	-156.11	-43.99	587.59	72.74	8.19	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 156 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: LEFFLER 8N-23C-L AWB Offset Wellpath: LEFFLER 8N-23C-L AWP

Facility: SEC.21-T06N-R66W Slot: SLOT#11 LEFFLER 8N-23C-L (2001'FNL & 275'FEL SEC.21) Well: LEFFLER 8N-23C-L Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
8425.00†	7177.84	-1154.73	-640.61	6871.34	6827.39	-1454.43	-176.06	-41.45	654.55	72.20	9.15	PASS	
8525.00†	7177.55	-1157.12	-740.58	6841.81	6802.94	-1452.53	-192.50	-39.35	726.62	71.81	10.21	PASS	
8625.00†	7177.25	-1159.52	-840.55	6815.60	6780.68	-1450.90	-206.24	-37.57	802.82	71.51	11.33	PASS	
8725.00†	7176.96	-1161.91	-940.52	6791.65	6759.93	-1449.47	-218.10	-36.02	882.33	71.25	12.50	PASS	
8825.00†	7176.67	-1164.30	-1040.49	6769.78	6740.65	-1448.23	-228.37	-34.68	964.51	71.02	13.71	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: LEFFLER 8N-23C-L AWB Offset Wellpath: LEFFLER 8N-23C-L AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: LEFFLER 8N-23C-L AWB Offset Wellpath: LEFFLER 8N-23C-L AWP

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
13.5in Open Hole	25.00	1791.00	1766.00	28.00	1789.56	-648.51	-14.42	-674.14	-34.13

WELLPATH COMPOSITION - Offset Wellbore: LEFFLER 8N-23C-L AWB Offset Wellpath: LEFFLER 8N-23C-L AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
25.00	1731.00	Custom BHI NaviTrak (Standard Rotating+Axial Corr) (Rockies 0.03Gt model)	BHI NAVITRAK W/EM 13.5" (STD ROTATING, AXIAL, ROCKIES GT)<112-1731>	LEFFLER 8N-23C-L AWB
1731.00	17686.00	Custom BHI AutoTrak Curve (IFR1, Short) (Rockies 0.03Gt model)	BHI ATC 8.5" (IFR, SHORT, ROCKIES GT)<1793-17686>	LEFFLER 8N-23C-L AWB
17686.00	17710.00	Blind Drilling (std)	Projection to bit	LEFFLER 8N-23C-L AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: LEFFLER 8N-23C-L AWB Offset Wellpath: LEFFLER 8N-23C-L AWP

MD Reference: PRECISION 562 (25') (RKB)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	25.00ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 157 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: DORIS #1 AWB Offset Wellpath: DORIS #1 AWP

Facility: SEC.21-T06N-R66W Slot: SLOT#01 EX:DORIS #1 (1920'SL & 680'FWL SEC.21, PR, 7238'MD) Well: DORIS #1 Threshold Value=1.00 † = Interpolated/extrapolated station												
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status
25.00	25.00	0.00	0.00	-19.00	25.00	-2501.74	-4364.25	-119.82	5030.45	25.57	204.44	PASS

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: DORIS #1 AWB Offset Wellpath: DORIS #1 AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: DORIS #1 AWB Offset Wellpath: DORIS #1 AWP

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
12.25in Open Hole	0.00	340.00	340.00	19.00	359.00	-1524.83	-2660.58	-1525.02	-2660.87
8.625in Casing Surface	0.00	340.00	340.00	19.00	359.00	-1524.83	-2660.58	-1525.02	-2660.87
7.5in Open Hole	340.00	7235.00	6895.00	359.00	7253.42	-1525.02	-2660.87	-1539.11	-2663.13
4.5in Casing Production	0.00	7235.00	7235.00	19.00	7253.42	-1524.83	-2660.58	-1539.11	-2663.13

WELLPATH COMPOSITION - Offset Wellbore: DORIS #1 AWB Offset Wellpath: DORIS #1 AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
0.00	4900.00	BHI Generic gyro - continuous (Standard)	NATIVE NAVIGATION GYRO SURVEYS FROM SRC <100-4900>	DORIS #1 AWB
4900.00	7238.00	Drift Indicator - Inclination Only (Actual Survey)	DRIFT INDICATOR TO TD <7238' FROM CO WEBSITE>	DORIS #1 AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: DORIS #1 AWB Offset Wellpath: DORIS #1 AWP

MD Reference: Rig on SLOT#01 EX:DORIS #1 (1920'SL & 680'FWL SEC.21, PR, 7238'MD) (RT)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	0.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 158 of 202

**BAKER
HUGHES**
a GE company



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. STATE HOPPE #16-1 AWB Offset Wellpath: EX. STATE HOPPE #16-1 AWP

Facility: SEC.16-T06N-R66W		Slot: SLOT#01 EX. STATE HOPPE #16-1 (561'FSL & 664'FWL, PR-NB/CD)		Well: EX. STATE HOPPE #16-1		Threshold Value=1.00 † = Interpolated/extrapolated station							
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	13.00	25.00	1366.22	-4385.55	-72.70	4593.43	50.19	93.28	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: EX. STATE HOPPE #16-1 AWB Offset Wellpath: EX. STATE HOPPE #16-1 AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

WELLPATH COMPOSITION - Offset Wellbore: EX. STATE HOPPE #16-1 AWB Offset Wellpath: EX. STATE HOPPE #16-1 AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
0.00	7282.00	Drift Indicator - Inclination Only (Actual Survey)	ASSUMED VERTICAL TO TD FROM COGCC <7282>	EX. STATE HOPPE #16-1 AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: EX. STATE HOPPE #16-1 AWB Offset Wellpath: EX. STATE HOPPE #16-1 AWP

MD Reference: Rig on SLOT#1 EX. STATE HOPPE #16-1 (561'FSL & 664'FWL, PR-NB/CD) (RT)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	0.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 159 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83, TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: LEFFLER 8N-23A-L AWB Offset Wellpath: LEFFLER 8N-23A-L AWP

Facility: SEC.21-T06N-R66W		Slot: SLOT#08 LEFFLER 8N-23A-L (1941'FNL & 275'FEL SEC.21)		Well: LEFFLER 8N-23A-L		Threshold Value=1.00 † = interpolated/extrapolated station							
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	22.00	25.00	-1003.71	-23.65	-178.65	1003.99	1.26	3343.43	PASS	
125.00†	125.00	0.00	0.00	129.16	132.16	-1003.26	-22.65	-178.71	1003.55	2.11	1020.33	PASS	
225.00†	225.00	0.00	0.00	222.90	225.88	-1002.84	-21.36	-178.78	1003.07	2.71	631.74	PASS	
300.00	300.00	0.00	0.00	287.72	290.70	-1003.13	-20.50	-178.83	1003.38	3.16	492.65	PASS	
325.00†	325.00	-0.09	0.06	311.52	314.49	-1003.37	-20.20	37.36	1003.55	3.33	453.89	PASS	
425.00†	424.96	-2.20	1.61	415.10	418.06	-1004.50	-20.07	37.46	1002.56	4.21	324.27	PASS	
525.00†	524.77	-7.13	5.22	524.74	527.71	-1004.46	-20.58	37.78	997.68	5.26	240.72	PASS	
625.00†	624.30	-14.86	10.88	616.21	619.15	-1004.35	-22.53	38.30	990.06	6.19	195.22	PASS	
725.00†	723.44	-25.39	18.59	709.81	712.66	-1005.10	-26.69	39.10	980.81	7.13	163.25	PASS	
825.00†	822.07	-38.71	28.34	812.00	814.73	-1005.85	-31.45	40.17	969.02	7.96	141.53	PASS	
895.18	890.91	-49.71	36.39	882.89	885.52	-1006.04	-35.22	41.06	959.03	8.45	130.75	PASS	
925.00†	920.09	-54.67	40.02	912.61	915.19	-1006.07	-37.01	41.41	954.52	8.62	127.16	PASS	
1025.00†	1017.94	-71.32	52.20	1033.76	1036.10	-1004.47	-44.34	42.89	938.31	9.29	114.85	PASS	
1125.00†	1115.79	-87.96	64.39	1148.97	1151.10	-1000.76	-50.30	44.31	920.65	10.00	103.60	PASS	
1225.00†	1213.64	-104.60	76.57	1260.21	1262.01	-994.50	-55.84	45.75	901.00	10.74	93.60	PASS	
1325.00†	1311.48	-121.25	88.76	1361.42	1362.87	-987.90	-61.23	47.16	881.04	11.38	85.81	PASS	
1425.00†	1409.33	-137.89	100.94	1451.50	1452.62	-981.96	-66.15	48.47	861.54	11.97	79.34	PASS	
1525.00†	1507.18	-154.53	113.12	1548.69	1549.49	-975.97	-71.23	49.93	842.93	12.60	73.34	PASS	
1625.00†	1605.03	-171.18	125.31	1648.14	1648.81	-969.51	-76.20	51.48	824.53	13.25	67.91	PASS	
1725.00†	1702.88	-187.82	137.49	1745.38	1745.53	-963.11	-80.57	53.02	806.50	13.89	63.08	PASS	
1825.00†	1800.73	-204.47	149.67	1840.99	1840.87	-956.85	-84.27	54.57	788.94	13.85	59.97	PASS	
1925.00†	1898.58	-221.11	161.86	1938.00	1937.60	-950.54	-87.90	56.19	771.99	14.07	57.74	PASS	
2025.00†	1996.43	-237.75	174.04	2029.51	2028.82	-944.43	-91.85	57.82	755.74	14.30	55.54	PASS	
2125.00†	2094.28	-254.40	186.22	2119.94	2118.96	-938.96	-96.50	59.54	741.06	14.63	53.17	PASS	
2225.00†	2192.13	-271.04	198.41	2211.17	2209.92	-933.90	-101.53	61.34	727.78	15.04	50.74	PASS	
2325.00†	2289.98	-287.68	210.59	2305.88	2304.37	-929.23	-106.68	63.24	715.86	15.52	48.30	PASS	
2425.00†	2387.83	-304.33	222.77	2406.60	2404.82	-924.07	-111.98	65.32	704.58	16.07	45.82	PASS	
2525.00†	2485.68	-320.97	234.96	2503.91	2501.86	-918.62	-116.86	67.39	693.71	16.69	43.37	PASS	
2625.00†	2583.53	-337.62	247.14	2595.48	2593.16	-913.67	-121.63	69.40	684.05	17.34	41.08	PASS	
2725.00†	2681.38	-354.26	259.33	2686.91	2684.34	-909.22	-126.78	71.46	676.06	18.04	38.96	PASS	
2825.00†	2779.23	-370.90	271.51	2774.32	2771.51	-905.63	-132.25	73.47	670.08	18.78	37.04	PASS	
2925.00†	2877.08	-387.55	283.69	2874.26	2871.17	-901.90	-138.77	75.80	665.63	19.60	35.20	PASS	
3025.00†	2974.93	-404.19	295.88	2985.07	2981.66	-896.33	-144.82	78.42	660.65	20.49	33.36	PASS	
3125.00†	3072.78	-420.83	308.06	3082.70	3079.01	-890.52	-149.47	80.77	655.73	21.37	31.70	PASS	
3225.00†	3170.63	-437.48	320.24	3177.40	3173.44	-885.05	-154.00	83.06	652.10	22.24	30.25	PASS	
3325.00†	3268.48	-454.12	332.43	3273.84	3269.62	-879.64	-158.53	85.41	649.69	23.13	28.94	PASS	
3425.00†	3366.33	-470.77	344.61	3367.43	3362.96	-874.40	-162.95	87.70	648.50	24.03	27.78	PASS	
3525.00†	3464.18	-487.41	356.79	3461.15	3456.43	-869.57	-167.73	89.99	649.02	24.94	26.76	PASS	
3625.00†	3562.03	-504.05	368.98	3573.47	3568.45	-863.17	-172.86	92.73	650.07	25.95	25.72	PASS	
3725.00†	3659.88	-520.70	381.16	3673.67	3668.36	-856.08	-175.82	95.19	650.21	26.96	24.74	PASS	
3825.00†	3757.73	-537.34	393.34	3754.46	3748.91	-850.79	-178.88	97.18	652.51	27.85	24.02	PASS	
3925.00†	3855.57	-553.98	405.53	3838.65	3832.86	-846.43	-183.46	99.19	657.99	28.77	23.43	PASS	
4025.00†	3953.42	-570.63	417.71	3937.59	3931.52	-841.94	-189.46	101.49	665.39	29.75	22.89	PASS	
4125.00†	4051.27	-587.27	429.90	4031.10	4024.76	-837.48	-194.97	103.63	673.62	30.69	22.45	PASS	
4225.00†	4149.12	-603.92	442.08	4126.75	4120.14	-833.17	-200.79	105.76	683.14	31.63	22.07	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 160 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: LEFFLER 8N-23A-L AWB Offset Wellpath: LEFFLER 8N-23A-L AWP

Facility: SEC.21-T06N-R66W		Slot: SLOT#08 LEFFLER 8N-23A-L (1941'FNL & 275'FEL SEC.21)				Well: LEFFLER 8N-23A-L		Threshold Value=1.00 † = interpolated/extrapolated station				
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status
4325.00†	4246.97	-620.56	454.26	4225.16	4218.27	-828.68	-206.64	107.88	693.49	32.60	21.72	PASS
4425.00†	4344.82	-637.20	466.45	4322.82	4315.64	-823.81	-212.24	109.96	704.47	33.57	21.42	PASS
4525.00†	4442.67	-653.85	478.63	4421.30	4413.85	-819.02	-217.78	111.98	716.31	34.54	21.15	PASS
4625.00†	4540.52	-670.49	490.81	4527.95	4520.20	-812.79	-222.83	114.15	727.98	35.58	20.86	PASS
4725.00†	4638.37	-687.13	503.00	4624.51	4616.49	-806.52	-226.54	116.10	739.56	36.55	20.62	PASS
4825.00†	4736.22	-703.78	515.18	4713.45	4705.18	-801.17	-230.47	117.81	752.62	37.46	20.46	PASS
4925.00†	4834.07	-720.42	527.36	4806.92	4798.37	-795.86	-235.34	119.53	767.25	38.41	20.33	PASS
5025.00†	4931.92	-737.07	539.55	4921.73	4912.84	-788.65	-240.35	121.61	781.84	39.52	20.13	PASS
5125.00†	5029.77	-753.71	551.73	5026.80	5017.60	-780.87	-242.74	123.52	795.03	40.57	19.93	PASS
5225.00†	5127.62	-770.35	563.91	5124.63	5115.13	-773.53	-244.31	125.24	808.33	41.55	19.77	PASS
5325.00†	5225.47	-787.00	576.10	5214.66	5204.90	-766.82	-245.97	126.77	822.57	42.48	19.68	PASS
5425.00†	5323.32	-803.64	588.28	5297.73	5287.72	-760.99	-248.56	128.12	838.69	43.35	19.65	PASS
5525.00†	5421.17	-820.28	600.47	5383.10	5372.84	-755.73	-252.50	129.40	856.77	44.25	19.66	PASS
5625.00†	5519.02	-836.93	612.65	5477.11	5466.57	-750.64	-257.53	130.71	876.01	45.21	19.67	PASS
5725.00†	5616.87	-853.57	624.83	5570.03	5559.24	-746.26	-262.87	131.91	896.02	46.16	19.70	PASS
5825.00†	5714.72	-870.22	637.02	5665.07	5654.01	-741.97	-268.55	133.06	916.62	47.14	19.73	PASS
5925.00†	5812.57	-886.86	649.20	5760.73	5749.40	-737.68	-274.39	134.18	937.69	48.12	19.76	PASS
6025.00†	5910.42	-903.50	661.38	5857.86	5846.24	-733.11	-280.21	135.28	959.03	49.12	19.80	PASS
6125.00†	6008.27	-920.15	673.57	5955.00	5943.00	-728.60	-286.00	136.33	980.33	50.10	19.83	PASS
6225.00†	6106.12	-936.79	685.75	6052.14	6040.00	-724.09	-291.79	137.34	1001.58	51.08	19.86	PASS
6325.00†	6203.97	-953.43	697.93	6149.28	6137.00	-719.58	-297.58	138.31	1022.78	52.05	19.89	PASS
6425.00†	6301.82	-970.08	710.12	6246.42	6234.00	-715.37	-303.37	139.24	1043.93	53.02	19.92	PASS
6525.00†	6399.66	-986.72	722.30	6343.56	6331.00	-711.16	-309.16	140.14	1065.03	54.00	19.95	PASS
6605.93	6478.85	-1000.19	732.16	6440.70	6428.00	-707.00	-314.95	141.00	1086.08	55.00	19.98	PASS
6625.00†	6497.54	-1003.38	734.20	6459.84	6447.00	-704.80	-317.20	141.50	1097.00	55.50	19.99	PASS
6725.00†	6595.97	-1020.39	735.57	6557.27	6545.00	-700.60	-323.00	142.36	1117.96	56.50	20.02	PASS
6825.00†	6693.34	-1037.59	721.30	6654.64	6642.00	-696.40	-328.80	143.18	1138.82	57.50	20.05	PASS
6925.00†	6787.24	-1054.57	691.74	6755.60	6743.00	-692.20	-334.60	143.96	1159.68	58.50	20.08	PASS
7012.50†	6864.74	-1068.91	653.90	6827.28	6815.00	-688.00	-340.40	144.70	1180.54	59.50	20.11	PASS
7019.04†	6870.31	-1069.96	650.64	6815.58	6803.31	-684.27	-342.67	144.80	1184.00	59.80	20.12	PASS
7025.00†	6875.37	-1070.91	647.62	6810.54	6798.27	-681.27	-344.94	144.90	1187.50	60.10	20.13	PASS
7125.00†	6955.55	-1086.20	590.03	6892.96	6880.69	-677.27	-350.74	145.60	1208.00	61.10	20.16	PASS
7225.00†	7025.81	-1100.06	520.38	6973.00	6960.73	-673.27	-356.54	146.30	1228.50	62.10	20.19	PASS
7325.00†	7084.42	-1112.16	440.40	7053.09	7040.82	-669.27	-362.34	146.96	1249.00	63.10	20.22	PASS
7425.00†	7129.94	-1122.20	352.04	7133.66	7121.39	-665.27	-368.14	147.58	1269.50	64.10	20.25	PASS
7525.00†	7161.25	-1129.93	257.49	7172.99	7160.72	-661.27	-373.94	148.16	1290.00	65.10	20.28	PASS
7625.00†	7177.57	-1135.16	159.08	7212.64	7200.37	-657.27	-379.74	148.70	1310.50	66.10	20.31	PASS
7682.94	7180.00	-1136.99	101.24	7217.07	7204.80	-656.00	-381.00	148.80	1314.00	66.40	20.32	PASS
7725.00†	7179.88	-1138.00	59.19	7215.23	7202.96	-654.73	-382.27	148.90	1317.50	66.70	20.33	PASS
7825.00†	7179.59	-1140.39	-40.78	7210.20	7197.93	-653.46	-383.54	149.00	1321.00	67.00	20.34	PASS
7925.00†	7179.29	-1142.78	-140.75	7205.17	7192.90	-652.19	-384.81	149.10	1324.50	67.30	20.35	PASS
8025.00†	7179.00	-1145.17	-240.72	7200.14	7187.87	-650.92	-386.08	149.20	1328.00	67.60	20.36	PASS
8125.00†	7178.71	-1147.56	-340.69	7195.11	7182.84	-649.65	-387.35	149.30	1331.50	67.90	20.37	PASS
8225.00†	7178.42	-1149.95	-440.66	7190.08	7177.81	-648.38	-388.62	149.40	1335.00	68.20	20.38	PASS
8325.00†	7178.13	-1152.34	-540.63	7185.05	7172.78	-647.11	-389.89	149.50	1338.50	68.50	20.39	PASS

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 161 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: LEFFLER 8N-23A-L AWB Offset Wellpath: LEFFLER 8N-23A-L AWP

Facility: SEC.21-T06N-R66W Slot: SLOT#08 LEFFLER 8N-23A-L (1941'FNL & 275'FEL SEC.21) Well: LEFFLER 8N-23A-L Threshold Value=1.00 † = Interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
8425.00†	7177.84	-1154.73	-640.61	6798.63	6733.29	-651.58	-124.97	47.73	846.56	74.69	11.43	PASS	
8525.00†	7177.55	-1157.12	-740.58	6760.99	6705.87	-648.53	-150.57	46.24	910.64	75.05	12.24	PASS	
8625.00†	7177.25	-1159.52	-840.55	6727.83	6680.39	-646.70	-171.71	44.88	978.37	75.31	13.11	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: LEFFLER 8N-23A-L AWB Offset Wellpath: LEFFLER 8N-23A-L AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: LEFFLER 8N-23A-L AWB Offset Wellpath: LEFFLER 8N-23A-L AWP

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
13.5in Open Hole	25.00	1801.00	1776.00	28.00	1800.99	-611.86	-14.42	-598.37	-32.43

WELLPATH COMPOSITION - Offset Wellbore: LEFFLER 8N-23A-L AWB Offset Wellpath: LEFFLER 8N-23A-L AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
25.00	1739.00	Custom BHI NaviTrak (Standard Rotating+Axial Corr) (Rockies 0.03Gt model)	BHI NAVITRAK W/EM 13.5" (STD ROTATING, AXIAL, ROCKIES GT)<112-1739>	LEFFLER 8N-23A-L AWB
1739.00	17504.00	Custom BHI AutoTrak Curve (IFR1, Short) (Rockies 0.03Gt model)	BHI ATC 8.5" (IFR, SHORT, ROCKIES GT)<1884-17504>	LEFFLER 8N-23A-L AWB
17504.00	17528.00	Blind Drilling (std)	Projection to bit	LEFFLER 8N-23A-L AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: LEFFLER 8N-23A-L AWB Offset Wellpath: LEFFLER 8N-23A-L AWP

MD Reference: PRECISION 562 (25') (RKB)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	25.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 162 of 202

**BAKER
HUGHES**
a GE company



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: HOOD 23N-22C-M AWB Offset Wellpath: HOOD 23N-22C-M AWP

Facility: SEC.20-T06N-R66W Slot: SLOT#06 HOOD 23N-22C-M (665'FSL & 1122'FEL SEC.20) Well: HOOD 23N-22C-M Threshold Value=1.00 † = interpolated/extrapolated station												
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status
25.00	25.00	0.00	0.00	8.00	25.00	-3782.98	-6164.96	-121.53	7233.10	25.57	293.97	PASS

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: HOOD 23N-22C-M AWB Offset Wellpath: HOOD 23N-22C-M AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: HOOD 23N-22C-M AWB Offset Wellpath: HOOD 23N-22C-M AWP

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
13.5in Open Hole	25.00	1771.00	1746.00	42.00	1783.74	-2305.64	-3758.45	-2292.35	-3745.74
9.625in Casing Surface	25.00	1761.00	1736.00	42.00	1773.89	-2305.64	-3758.45	-2292.71	-3746.12
8.5in Open Hole	1771.00	15315.00	13544.00	1783.74	7098.37	-2292.35	-3745.74	-2051.36	-1003.66

WELLPATH COMPOSITION - Offset Wellbore: HOOD 23N-22C-M AWB Offset Wellpath: HOOD 23N-22C-M AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
25.00	1712.00	Custom BHI NaviTrak (Standard Rotating+Axial Corr) (Rockies 0.03Gt model)	BHI NAVITRAK 13.5" (STD ROTATING, AXIAL, ROCKIES GT)<109-1712>	HOOD 23N-22C-M AWB
1712.00	15291.00	Custom BHI AutoTrak Curve (IFR1, Short) (Rockies 0.03Gt model)	BHI ATC 8.5" (IFR, SHORT, ROCKIES GT)<1794-15291>	HOOD 23N-22C-M AWB
15291.00	15315.00	Blind Drilling (std)	Projection to bit	HOOD 23N-22C-M AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: HOOD 23N-22C-M AWB Offset Wellpath: HOOD 23N-22C-M AWP

MD Reference: PRECISION 562 (25') (RKB)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	25.00ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 163 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: HAROLD "B" #1 AWB Offset Wellpath: HAROLD "B" #1 AWP

Facility: SEC.21-T06N-R66W Slot: SLOT#01 EX:HAROLD "B" #1 (1980'FSL & 1790'FWL SEC.21, PR, 7275'MD) Well: HAROLD "B" #1 Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	-6.00	25.00	-2409.01	-3263.02	-126.44	4055.94	25.57	164.82	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: HAROLD "B" #1 AWB Offset Wellpath: HAROLD "B" #1 AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: HAROLD "B" #1 AWB Offset Wellpath: HAROLD "B" #1 AWP

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
12in Open Hole	0.00	302.00	302.00	6.00	307.97	-1468.40	-1989.24	-1467.70	-1990.16
9.625in Casing Surface	0.00	302.00	302.00	6.00	307.97	-1468.40	-1989.24	-1467.70	-1990.16
7.875in Open Hole	302.00	7263.00	6961.00	307.97	7267.90	-1467.70	-1990.16	-1476.79	-2014.51
4.5in Casing Production	0.00	7263.00	7263.00	6.00	7267.90	-1468.40	-1989.24	-1476.79	-2014.51

WELLPATH COMPOSITION - Offset Wellbore: HAROLD "B" #1 AWB Offset Wellpath: HAROLD "B" #1 AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
0.00	7050.00	VESSI GyroFlex v4	VES GYRO SURVEYS FROM SYNERGY, ADJ FROM GRID TO TRUE <100-7050>	HAROLD "B" #1 AWB
7050.00	7275.00	Drift Indicator - Inclination Only (Actual Survey)	DRIFT INDICATOR TO TD <7275' FROM CO WEBSITE>	HAROLD "B" #1 AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: HAROLD "B" #1 AWB Offset Wellpath: HAROLD "B" #1 AWP

MD Reference: Rig on SLOT#01 EX:HAROLD "B" #1 (1980'FSL & 1790'FWL SEC.21, PR, 7275'MD) (RT)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	0.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 164 of 202

**BAKER
HUGHES**
a GE company



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. FRTIZLER #6-8-17 AWB Offset Wellpath: EX. FRTIZLER #6-8-17 AWP

Facility: SEC.17-T06N-R66W Slot: SLOT#02 EX. FRTIZLER #6-8-17 (660'FSL & 668'FEL, PR NB/CD) Well: EX. FRTIZLER #6-8-17 Threshold Value=1.00 † = interpolated/extrapolated station												
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status
25.00	25.00	0.00	0.00	11.75	16.75	1495.46	-5718.02	-75.34	5910.35	50.17	120.10	PASS

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: EX. FRTIZLER #6-8-17 AWB Offset Wellpath: EX. FRTIZLER #6-8-17 AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

WELLPATH COMPOSITION - Offset Wellbore: EX. FRTIZLER #6-8-17 AWB Offset Wellpath: EX. FRTIZLER #6-8-17 AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
0.00	7356.00	ISWWSA MWD, Rev. 4 (Standard)	MS ENERGY SERVICES MWD SURVEY FROM COGCC <82;-7356>	EX. FRTIZLER #6-8-17 AWB
7356.00	7418.00	Blind Drilling (std)	Projection to bit	EX. FRTIZLER #6-8-17 AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: EX. FRTIZLER #6-8-17 AWB Offset Wellpath: EX. FRTIZLER #6-8-17 AWP

MD Reference: Rig on SLOT#02 EX. FRTIZLER #6-8-17 (660'FSL & 668'FEL, PR NB/CD) (RT)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	0.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 165 of 202

**BAKER
HUGHES**
a GE company



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. BURMAN #16-43 AWB Offset Wellpath: EX. BURMAN #16-43 AWP

Facility: SEC.16-T06N-R66W		Slot: SLOT#02 EX. BURMAN #16-43 (466'FSL & 1793'FEL, PR, NB/CD)		Well: EX. BURMAN #16-43		Threshold Value=1.00		† = Interpolated/extrapolated station					
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	20.00	25.00	1370.97	-1534.18	-48.22	2057.49	50.21	41.76	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: EX. BURMAN #16-43 AWB Offset Wellpath: EX. BURMAN #16-43 AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

WELLPATH COMPOSITION - Offset Wellbore: EX. BURMAN #16-43 AWB Offset Wellpath: EX. BURMAN #16-43 AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
0.00	7396.00	Drift Indicator - Inclination Only (Actual Survey)	ASSUMED VERTICAL TO TD FROM COGCC <7396>	EX. BURMAN #16-43 AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: EX. BURMAN #16-43 AWB Offset Wellpath: EX. BURMAN #16-43 AWP

MD Reference: Rig on SLOT#02 EX. BURMAN #16-43 (466'FSL & 1793'FEL, PR, NB/CD) (RT)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	0.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 166 of 202

**BAKER
HUGHES**
a GE company



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: HOOD 23C-22-M AWB Offset Wellpath: HOOD 23C-22-M AWP

Facility: SEC.20-T06N-R66W Slot: SLOT#07 HOOD 23C-22-M (585'FSL & 1122'FEL SEC.20) Well: HOOD 23C-22-M Threshold Value=1.00 † = interpolated/extrapolated station												
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status
25.00	25.00	0.00	0.00	8.00	25.00	-3862.83	-6164.98	-122.07	7275.19	25.57	295.68	PASS

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: HOOD 23C-22-M AWB Offset Wellpath: HOOD 23C-22-M AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: HOOD 23C-22-M AWB Offset Wellpath: HOOD 23C-22-M AWP

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
13.5in Open Hole	25.00	1761.00	1736.00	42.00	1776.45	-2354.31	-3758.47	-2346.60	-3751.71
9.625in Casing Surface	25.00	1761.00	1736.00	42.00	1776.45	-2354.31	-3758.47	-2346.60	-3751.71
8.5in Open Hole	1761.00	15425.00	13664.00	1776.45	7203.69	-2346.60	-3751.71	-2137.54	-1003.22

WELLPATH COMPOSITION - Offset Wellbore: HOOD 23C-22-M AWB Offset Wellpath: HOOD 23C-22-M AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
25.00	1712.00	Custom BHI NaviTrak (Standard Rotating+Axial Corr) (Rockies 0.03Gt model)	BHI NAVITRAK 13.5" (STD ROTATING, AXIAL, ROCKIES GT)<109-1712>	HOOD 23C-22-M AWB
1712.00	15401.00	Custom BHI AutoTrak Curve (IFR1, Short) (Rockies 0.03Gt model)	BHI ATC 8.5 (IFR, SHORT, ROCKIES GT)<1793-15401>	HOOD 23C-22-M AWB
15401.00	15425.00	Blind Drilling (std)	Projection to bit	HOOD 23C-22-M AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: HOOD 23C-22-M AWB Offset Wellpath: HOOD 23C-22-M AWP

MD Reference: PRECISION 562 (25') (RKB)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	25.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 167 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: LEFFLER 40C-23-L AWB Offset Wellpath: LEFFLER 40C-23-L AWP

Facility: SEC.21-T06N-R66W			Slot: SLOT#12 LEFFLER 40C-23-L (2021'FNL & 275'FEL SEC.21)			Well: LEFFLER 40C-23-L		Threshold Value=1.00 † = interpolated/extrapolated station					
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	22.00	25.00	-1083.86	-23.65	-178.75	1084.12	1.26	3610.53	PASS	
125.00†	125.00	0.00	0.00	133.74	136.73	-1083.20	-24.04	-178.73	1083.53	2.15	1053.04	PASS	
225.00†	225.00	0.00	0.00	235.91	238.89	-1081.87	-25.09	-178.67	1082.25	2.78	651.69	PASS	
300.00	300.00	0.00	0.00	305.81	308.78	-1081.07	-25.87	-178.63	1081.41	3.20	520.22	PASS	
325.00†	325.00	-0.09	0.06	326.76	329.73	-1080.93	-26.08	37.59	1081.17	3.34	487.82	PASS	
425.00†	424.96	-2.20	1.61	415.64	418.61	-1081.13	-26.85	37.73	1079.33	4.10	362.26	PASS	
525.00†	524.77	-7.13	5.22	510.48	513.45	-1081.80	-27.19	37.99	1075.23	5.15	266.83	PASS	
625.00†	624.30	-14.86	10.88	603.92	606.88	-1083.16	-27.21	38.36	1069.12	6.03	217.55	PASS	
725.00†	723.44	-25.39	18.59	707.13	710.07	-1084.78	-26.82	38.90	1060.45	6.87	184.26	PASS	
825.00†	822.07	-38.71	28.34	819.58	822.52	-1085.60	-25.68	39.64	1048.28	7.72	158.80	PASS	
895.18	890.91	-49.71	36.39	888.63	891.55	-1085.56	-24.74	40.20	1037.65	8.24	145.74	PASS	
925.00†	920.09	-54.67	40.02	917.04	919.96	-1085.57	-24.41	40.39	1032.91	8.42	141.43	PASS	
1025.00†	1017.94	-71.32	52.20	1012.78	1015.70	-1085.72	-23.86	41.09	1017.26	8.95	129.88	PASS	
1125.00†	1115.79	-87.96	64.39	1118.72	1121.64	-1085.51	-23.61	41.91	1001.44	9.56	118.63	PASS	
1225.00†	1213.64	-104.60	76.57	1215.60	1218.52	-1084.88	-23.28	42.68	985.36	10.15	109.10	PASS	
1325.00†	1311.48	-121.25	88.76	1301.22	1304.13	-1084.90	-23.47	43.41	970.20	10.70	101.25	PASS	
1425.00†	1409.33	-137.89	100.94	1380.35	1383.26	-1086.16	-24.16	44.12	956.84	11.28	94.12	PASS	
1525.00†	1507.18	-154.53	113.12	1452.00	1454.83	-1088.91	-25.83	44.82	946.10	11.92	87.57	PASS	
1625.00†	1605.03	-171.18	125.31	1528.62	1531.24	-1093.67	-28.78	45.64	938.18	12.64	81.40	PASS	
1725.00†	1702.88	-187.82	137.49	1617.42	1619.68	-1100.77	-32.45	46.59	932.35	13.25	76.81	PASS	
1825.00†	1800.73	-204.47	149.67	1701.79	1703.64	-1108.30	-35.87	47.50	927.78	13.57	73.26	PASS	
1925.00†	1898.58	-221.11	161.86	1785.51	1786.78	-1117.03	-40.27	48.45	925.22	13.62	71.60	PASS	
2025.00†	1996.43	-237.75	174.04	1893.21	1893.73	-1128.88	-44.94	49.61	923.37	13.86	70.17	PASS	
2125.00†	2094.28	-254.40	186.22	1998.09	1998.01	-1139.69	-47.89	50.66	920.77	14.17	68.35	PASS	
2225.00†	2192.13	-271.04	198.41	2094.70	2094.07	-1149.42	-50.98	51.65	918.35	14.54	66.33	PASS	
2325.00†	2289.98	-287.68	210.59	2193.78	2192.58	-1159.27	-55.19	52.75	916.40	15.00	64.09	PASS	
2425.00†	2387.83	-304.33	222.77	2296.15	2294.37	-1168.75	-60.55	53.95	914.46	15.53	61.64	PASS	
2525.00†	2485.68	-320.97	234.96	2396.72	2394.37	-1177.37	-66.70	55.21	912.56	16.13	59.11	PASS	
2625.00†	2583.53	-337.62	247.14	2493.78	2490.89	-1185.48	-72.94	56.44	910.99	16.78	56.63	PASS	
2725.00†	2681.38	-354.26	259.33	2590.83	2587.40	-1193.78	-79.04	57.67	910.01	17.48	54.21	PASS	
2825.00†	2779.23	-370.90	271.51	2688.02	2684.03	-1202.19	-85.13	58.90	909.55	18.23	51.88	PASS	
2925.00†	2877.08	-387.55	283.69	2783.94	2779.38	-1210.67	-91.13	60.10	909.71	19.01	49.66	PASS	
3025.00†	2974.93	-404.19	295.88	2882.70	2877.57	-1219.70	-96.76	61.31	910.33	19.84	47.54	PASS	
3125.00†	3072.78	-420.83	308.06	2979.67	2973.97	-1228.81	-101.97	62.46	911.43	20.70	45.57	PASS	
3225.00†	3170.63	-437.48	320.24	3078.03	3071.76	-1238.19	-106.94	63.61	912.91	21.58	43.70	PASS	
3325.00†	3268.48	-454.12	332.43	3175.82	3168.96	-1247.61	-111.95	64.75	914.88	22.49	41.97	PASS	
3425.00†	3366.33	-470.77	344.61	3275.17	3267.73	-1256.99	-117.15	65.91	917.11	23.43	40.33	PASS	
3525.00†	3464.18	-487.41	356.79	3374.49	3366.48	-1266.31	-122.27	67.07	919.64	24.39	38.81	PASS	
3625.00†	3562.03	-504.05	368.98	3470.17	3461.61	-1275.16	-127.41	68.19	922.54	25.34	37.43	PASS	
3725.00†	3659.88	-520.70	381.16	3569.21	3560.06	-1284.52	-132.82	69.33	926.05	26.33	36.12	PASS	
3825.00†	3757.73	-537.34	393.34	3670.76	3661.03	-1294.09	-137.90	70.48	929.65	27.34	34.88	PASS	
3925.00†	3855.57	-553.98	405.53	3769.08	3758.80	-1303.60	-142.15	71.54	933.40	28.34	33.75	PASS	
4025.00†	3953.42	-570.63	417.71	3866.67	3855.83	-1313.23	-146.16	72.57	937.51	29.35	32.70	PASS	
4125.00†	4051.27	-587.27	429.90	3962.34	3950.94	-1322.62	-150.51	73.59	942.16	30.36	31.75	PASS	
4225.00†	4149.12	-603.92	442.08	4058.84	4046.87	-1331.60	-155.81	74.67	947.34	31.39	30.86	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 168 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: LEFFLER 40C-23-L AWB Offset Wellpath: LEFFLER 40C-23-L AWP

Facility: SEC.21-T06N-R66W Slot: SLOT#12 LEFFLER 40C-23-L (2021'FNL & 275'FEL SEC.21) Well: LEFFLER 40C-23-L Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
4325.00†	4246.97	-620.56	454.26	4155.15	4142.60	-1339.68	-162.55	75.84	953.14	32.41	30.04	PASS	
4425.00†	4344.82	-637.20	466.45	4254.67	4241.52	-1346.86	-170.77	77.13	959.34	33.47	29.26	PASS	
4525.00†	4442.67	-653.85	478.63	4354.78	4341.04	-1353.49	-179.30	78.44	965.76	34.53	28.54	PASS	
4625.00†	4540.52	-670.49	490.81	4451.36	4437.08	-1359.78	-187.41	79.69	972.53	35.57	27.88	PASS	
4725.00†	4638.37	-687.13	503.00	4544.94	4530.10	-1366.04	-195.47	80.89	980.05	36.60	27.29	PASS	
4825.00†	4736.22	-703.78	515.18	4642.49	4627.04	-1372.64	-204.14	82.13	988.29	37.66	26.73	PASS	
4925.00†	4834.07	-720.42	527.36	4739.13	4723.08	-1379.18	-212.66	83.33	996.95	38.71	26.22	PASS	
5025.00†	4931.92	-737.07	539.55	4833.41	4816.76	-1386.01	-220.82	84.46	1006.26	39.75	25.76	PASS	
5125.00†	5029.77	-753.71	551.73	4934.91	4917.61	-1394.44	-228.65	85.58	1015.93	40.84	25.30	PASS	
5225.00†	5127.62	-770.35	563.91	5036.04	5018.07	-1404.03	-235.13	86.57	1025.68	41.94	24.86	PASS	
5325.00†	5225.47	-787.00	576.10	5144.26	5125.62	-1414.71	-240.64	87.54	1034.92	43.08	24.41	PASS	
5425.00†	5323.32	-803.64	588.28	5247.56	5228.30	-1425.11	-244.87	88.42	1043.74	44.19	23.99	PASS	
5525.00†	5421.17	-820.28	600.47	5350.90	5331.02	-1436.01	-248.18	89.22	1052.35	45.30	23.58	PASS	
5625.00†	5519.02	-836.93	612.65	5456.99	5436.46	-1447.44	-250.66	90.00	1060.59	46.43	23.18	PASS	
5725.00†	5616.87	-853.57	624.83	5560.51	5539.35	-1458.80	-252.11	90.70	1068.33	47.55	22.79	PASS	
5825.00†	5714.72	-870.22	637.02	5648.94	5627.23	-1468.44	-253.76	91.31	1076.57	48.57	22.48	PASS	
5925.00†	5812.57	-886.86	649.20	5741.15	5718.87	-1478.26	-256.51	91.97	1085.75	49.61	22.19	PASS	
6025.00†	5910.42	-903.50	661.38	5836.34	5813.49	-1488.02	-260.07	92.69	1095.51	50.68	21.91	PASS	
6125.00†	6008.27	-920.15	673.57	5929.24	5905.81	-1497.62	-263.99	93.38	1105.89	51.73	21.66	PASS	
6225.00†	6106.12	-936.79	685.75	6023.87	5999.82	-1507.44	-268.43	94.08	1116.87	52.79	21.43	PASS	
6325.00†	6203.97	-953.43	697.93	6120.28	6095.60	-1517.30	-273.28	94.80	1128.25	53.86	21.21	PASS	
6425.00†	6301.82	-970.08	710.12	7986.44	7193.25	-1613.50	736.67	46.57	1099.70	55.51	20.06	PASS	
6525.00†	6399.66	-986.72	722.30	7997.87	7193.32	-1612.92	748.09	45.29	1011.28	57.91	17.67	PASS	
6605.93	6478.85	-1000.19	732.16	8007.17	7193.39	-1612.46	757.37	44.23	941.31	60.14	15.83	PASS	
6625.00†	6497.54	-1003.38	734.20	8009.09	7193.40	-1612.37	759.29	33.95	925.05	60.71	15.41	PASS	
6725.00†	6595.97	-1020.39	735.57	8010.27	7193.41	-1612.31	760.47	-28.59	841.38	63.77	13.33	PASS	
6825.00†	6693.34	-1037.59	721.30	7996.43	7193.31	-1613.00	746.64	-68.90	762.70	67.02	11.49	PASS	
6925.00†	6787.24	-1054.57	691.74	7967.17	7193.12	-1614.48	717.42	-87.29	692.02	70.28	9.94	PASS	
7025.00†	6875.37	-1070.91	647.62	7912.63	7192.77	-1616.73	662.93	-94.91	631.58	72.96	8.73	PASS	
7125.00†	6955.55	-1086.20	590.03	7849.42	7192.36	-1618.22	599.74	-97.94	582.43	75.09	7.82	PASS	
7225.00†	7025.81	-1100.06	520.38	7779.96	7191.91	-1619.72	530.30	-98.36	545.65	76.63	7.18	PASS	
7325.00†	7084.42	-1112.16	440.40	7695.76	7191.31	-1621.19	446.12	-96.70	520.16	77.35	6.78	PASS	
7425.00†	7129.94	-1122.20	352.04	7595.49	7190.50	-1621.22	345.84	-94.02	502.72	77.42	6.54	PASS	
7525.00†	7161.25	-1129.93	257.49	7480.65	7180.33	-1618.48	231.66	-90.54	489.60	77.21	6.39	PASS	
7625.00†	7177.57	-1135.16	159.08	7371.80	7154.29	-1611.12	126.35	-86.66	477.65	77.35	6.22	PASS	
7682.94	7180.00	-1136.99	101.24	7319.49	7135.65	-1606.75	77.68	-84.61	472.44	77.74	6.12	PASS	
7725.00†	7179.88	-1138.00	59.19	7285.13	7121.23	-1603.95	46.63	-82.83	469.80	78.14	6.06	PASS	
7795.63†	7179.67	-1139.69	-11.41	7233.53	7096.42	-1599.98	1.57	-79.75	467.94	79.20	5.95	PASS	
7816.42†	7179.61	-1140.18	-32.20	7218.51	7088.48	-1598.92	-11.13	-78.77	468.18	79.48	5.93	PASS	
7825.00†	7179.59	-1140.39	-40.78	7212.83	7085.39	-1598.53	-15.88	-78.39	468.39	79.44	5.94	PASS	
7925.00†	7179.29	-1142.78	-140.75	7149.14	7047.69	-1594.69	-67.03	-73.80	476.42	80.63	5.95	PASS	
8025.00†	7179.00	-1145.17	-240.72	7085.59	7005.60	-1590.76	-114.46	-68.82	494.53	81.36	6.12	PASS	
8125.00†	7178.71	-1147.56	-340.69	7036.54	6970.40	-1587.58	-148.46	-64.83	523.41	81.74	6.45	PASS	
8225.00†	7178.42	-1149.95	-440.66	6995.59	6939.11	-1585.23	-174.76	-61.47	563.42	81.70	6.95	PASS	
8325.00†	7178.13	-1152.34	-540.63	6961.99	6912.22	-1583.60	-194.83	-58.73	613.41	81.53	7.58	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 169 of 202

**BAKER
HUGHES**
a GE company



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: LEFFLER 40C-23-L AWB Offset Wellpath: LEFFLER 40C-23-L AWP

Facility: SEC.21-T06N-R66W Slot: SLOT#12 LEFFLER 40C-23-L (2021'FNL & 275'FEL SEC.21) Well: LEFFLER 40C-23-L Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
8425.00†	7177.84	-1154.73	-640.61	6933.41	6888.50	-1582.57	-210.74	-56.44	671.97	81.28	8.33	PASS	
8525.00†	7177.55	-1157.12	-740.58	6908.40	6867.15	-1581.96	-223.75	-54.49	737.52	80.16	9.27	PASS	
8625.00†	7177.25	-1159.52	-840.55	6887.15	6848.60	-1581.63	-234.11	-52.88	808.68	79.68	10.23	PASS	
8725.00†	7176.96	-1161.91	-940.52	6869.61	6832.99	-1581.47	-242.08	-51.58	884.40	79.24	11.25	PASS	
8825.00†	7176.67	-1164.30	-1040.49	6854.29	6819.11	-1581.40	-248.58	-50.46	963.81	78.80	12.33	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: LEFFLER 40C-23-L AWB Offset Wellpath: LEFFLER 40C-23-L AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: LEFFLER 40C-23-L AWB Offset Wellpath: LEFFLER 40C-23-L AWP

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
13.5in Open Hole	25.00	1776.00	1751.00	28.00	1777.35	-660.72	-14.42	-670.51	-19.33

WELLPATH COMPOSITION - Offset Wellbore: LEFFLER 40C-23-L AWB Offset Wellpath: LEFFLER 40C-23-L AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
25.00	1716.00	Custom BHI NaviTrak (Standard Rotating+Axial Corr) (Rockies 0.03Gt model)	BHI NAVITRAK W/EM 13.5"(STD ROTATING, AXIAL, ROCKIES GT)<112-1716>	LEFFLER 40C-23-L AWB
1716.00	17786.00	Custom BHI AutoTrak Curve (IFR1, Short) (Rockies 0.03Gt model)	BHI ATC 8.5" (IFR, SHORT, ROCKIES GT)<1793-17786>	LEFFLER 40C-23-L AWB
17786.00	17810.00	Blind Drilling (std)	Projection to bit	LEFFLER 40C-23-L AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: LEFFLER 40C-23-L AWB Offset Wellpath: LEFFLER 40C-23-L AWP

MD Reference: PRECISION 562 (25") (RKB)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	25.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 170 of 202

**BAKER
HUGHES**
a GE company



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: HOOD 23N-22B-M AWB Offset Wellpath: HOOD 23N-22B-M AWP

Facility: SEC.20-T06N-R66W Slot: SLOT#08 HOOD 23N-22B-M (565'FSL & 1122'FEL SEC.20) Well: HOOD 23N-22B-M Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	8.00	25.00	-3882.86	-6164.99	-122.20	7285.86	25.57	296.11	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: HOOD 23N-22B-M AWB Offset Wellpath: HOOD 23N-22B-M AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: HOOD 23N-22B-M AWB Offset Wellpath: HOOD 23N-22B-M AWP

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
13.5in Open Hole	25.00	1750.00	1725.00	42.00	1764.40	-2366.52	-3758.47	-2355.64	-3746.25
9.625in Casing Surface	25.00	1762.00	1737.00	42.00	1776.26	-2366.52	-3758.47	-2355.30	-3745.81
8.5in Open Hole	1750.00	15230.00	13480.00	1764.40	7025.37	-2355.64	-3746.25	-2200.75	-1008.41

WELLPATH COMPOSITION - Offset Wellbore: HOOD 23N-22B-M AWB Offset Wellpath: HOOD 23N-22B-M AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
25.00	1712.00	Custom BHI NaviTrak (Standard Rotating+Axial Corr) (Rockies 0.03Gt model)	BHI NAVITRAK 13.5" (STD ROTATING, AXIAL, ROCKIES GT)<108-1712>	HOOD 23N-22B-M AWB
1712.00	15206.00	Custom BHI AutoTrak Curve (IFR1, Short) (Rockies 0.03Gt model)	BHI ATC 8.5" (IFR, SHORT, ROCKIES GT)<1792-15206>	HOOD 23N-22B-M AWB
15206.00	15230.00	Blind Drilling (std)	Projection to bit	HOOD 23N-22B-M AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: HOOD 23N-22B-M AWB Offset Wellpath: HOOD 23N-22B-M AWP

MD Reference: PRECISION 562 (25') (RKB)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	25.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 171 of 202

**BAKER
HUGHES**
a GE company



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. FRITZLER #8-8-17 AWB Offset Wellpath: EX. FRITZLER #8-8-17 AWP

Facility: SEC.17-T06N-R66W Slot: SLOT#01 EX.FRITZLER #8-8-17 (658'FSL & 608'FEL, PR,NB/CD) Well: EX. FRITZLER #8-8-17 Threshold Value=1.00 † = interpolated/extrapolated station												
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status
25.00	25.00	0.00	0.00	1087.31	1079.04	1391.88	-5550.71	-75.92	5818.83	50.29	117.94	PASS

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: EX. FRITZLER #8-8-17 AWB Offset Wellpath: EX. FRITZLER #8-8-17 AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

WELLPATH COMPOSITION - Offset Wellbore: EX. FRITZLER #8-8-17 AWB Offset Wellpath: EX. FRITZLER #8-8-17 AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
0.00	7380.00	ISW/SA MWD, Rev. 4 (Standard)	MS ENERGY SERVICES MWD SURVEY FROM COGCC <172-7380>	EX. FRITZLER #8-8-17 AWB
7380.00	7433.00	Blind Drilling (std)	Projection to bit	EX. FRITZLER #8-8-17 AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: EX. FRITZLER #8-8-17 AWB Offset Wellpath: EX. FRITZLER #8-8-17 AWP

MD Reference: Rig on SLOT#01 FRITZLER #8-8-17 (658'FSL & 608'FEL, PR,NB/CD) (RT)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	0.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 172 of 202

**BAKER
HUGHES**
a GE company



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. FRITZLER #34-17 AWB Offset Wellpath: EX. FRITZLER #34-17 AWP

Facility: SEC.17-T06N-R66W Slot: SLOT#03 EX. FRITZLER #34-17 (660'FSL & 683'FEL, PR, NB/CD) Well: EX. FRITZLER #34-17 Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	10.78	15.78	1491.82	-5734.71	-75.42	5925.58	50.17	120.41	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: EX. FRITZLER #34-17 AWB Offset Wellpath: EX. FRITZLER #34-17 AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

WELLPATH COMPOSITION - Offset Wellbore: EX. FRITZLER #34-17 AWB Offset Wellpath: EX. FRITZLER #34-17 AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
0.00	7414.00	ISWWSA MWD, Rev. 4 (Standard)	MS ENERGY SERVICES MWD SURVEY FROM COGCC <168°-7414°>	EX. FRITZLER #34-17 AWB
7414.00	7477.00	Blind Drilling (std)	Projection to bit	EX. FRITZLER #34-17 AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: EX. FRITZLER #34-17 AWB Offset Wellpath: EX. FRITZLER #34-17 AWP

MD Reference: Rig on SLOT#03 EX. FRITZLER #34-17 (660'FSL & 683'FEL, PR, NB/CD) (RT)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	0.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 173 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: LEFFLER 41C-23-L AWB Offset Wellpath: LEFFLER 41C-23-L AWP

Facility: SEC.21-T06N-R66W			Slot: SLOT#07 LEFFLER 41C-23-L (1921'FNL & 275'FEL SEC.21)			Well: LEFFLER 41C-23-L		Threshold Value=1.00 † = interpolated/extrapolated station				
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status
25.00	25.00	0.00	0.00	22.00	25.00	-983.68	-23.65	-178.62	983.96	1.26	3276.66	PASS
125.00†	125.00	0.00	0.00	111.29	114.28	-984.16	-23.06	-178.66	984.49	2.08	1027.90	PASS
225.00†	225.00	0.00	0.00	215.94	218.92	-985.09	-21.69	-178.74	985.35	2.75	606.75	PASS
300.00	300.00	0.00	0.00	294.90	297.88	-985.42	-21.66	-178.74	985.66	3.29	454.13	PASS
325.00†	325.00	-0.09	0.06	320.86	323.83	-985.46	-21.90	37.48	985.62	3.50	414.24	PASS
425.00†	424.96	-2.20	1.61	421.15	424.12	-985.43	-23.20	37.68	983.54	4.40	299.85	PASS
525.00†	524.77	-7.13	5.22	516.20	519.13	-985.66	-25.96	38.10	979.05	5.41	228.12	PASS
625.00†	624.30	-14.86	10.88	619.10	621.93	-986.12	-30.34	38.81	972.14	6.30	187.70	PASS
725.00†	723.44	-25.39	18.59	732.30	735.00	-985.36	-35.74	39.82	961.58	7.18	158.63	PASS
825.00†	822.07	-38.71	28.34	864.63	867.05	-980.96	-43.07	41.35	946.02	8.27	132.33	PASS
895.18	890.91	-49.71	36.39	949.42	951.53	-975.67	-47.91	42.55	931.76	8.99	118.31	PASS
925.00†	920.09	-54.67	40.02	981.62	983.61	-973.35	-49.61	42.96	925.22	9.21	114.34	PASS
1025.00†	1017.94	-71.32	52.20	1094.88	1096.36	-964.03	-54.77	44.39	902.51	9.83	103.53	PASS
1125.00†	1115.79	-87.96	64.39	1188.30	1189.32	-955.47	-58.31	45.59	879.22	10.40	94.66	PASS
1225.00†	1213.64	-104.60	76.57	1277.55	1278.15	-947.72	-62.06	46.82	856.87	10.95	87.14	PASS
1325.00†	1311.48	-121.25	88.76	1368.94	1369.13	-940.26	-66.51	48.18	835.59	11.53	80.24	PASS
1425.00†	1409.33	-137.89	100.94	1461.38	1461.17	-933.06	-71.24	49.62	815.24	12.13	74.00	PASS
1525.00†	1507.18	-154.53	113.12	1560.28	1559.67	-925.45	-75.76	51.20	795.45	12.75	68.30	PASS
1625.00†	1605.03	-171.18	125.31	1657.38	1656.37	-917.73	-79.98	52.81	775.96	13.40	63.10	PASS
1725.00†	1702.88	-187.82	137.49	1755.27	1753.84	-909.75	-84.23	54.53	756.92	14.03	58.55	PASS
1825.00†	1800.73	-204.47	149.67	1848.71	1846.86	-902.01	-88.45	56.26	738.51	13.99	55.57	PASS
1925.00†	1898.58	-221.11	161.86	1941.85	1939.63	-894.70	-92.47	58.03	721.18	14.15	53.61	PASS
2025.00†	1996.43	-237.75	174.04	2030.52	2027.98	-888.20	-96.33	59.79	705.11	14.40	51.45	PASS
2125.00†	2094.28	-254.40	186.22	2119.62	2116.77	-882.50	-101.00	61.65	691.02	14.75	49.17	PASS
2225.00†	2192.13	-271.04	198.41	2217.33	2214.11	-876.35	-106.88	63.82	678.30	15.18	46.83	PASS
2325.00†	2289.98	-287.68	210.59	2325.15	2321.50	-868.62	-112.57	66.28	665.52	15.70	44.35	PASS
2425.00†	2387.83	-304.33	222.77	2421.57	2417.57	-861.30	-116.15	68.47	652.67	16.29	41.84	PASS
2525.00†	2485.68	-320.97	234.96	2503.67	2499.43	-855.99	-119.39	70.36	641.87	16.90	39.59	PASS
2625.00†	2583.53	-337.62	247.14	2588.41	2583.91	-851.49	-124.26	72.43	634.05	17.61	37.48	PASS
2725.00†	2681.38	-354.26	259.33	2688.79	2683.93	-846.35	-130.93	74.98	628.06	18.38	35.50	PASS
2825.00†	2779.23	-370.90	271.51	2789.57	2784.36	-840.37	-136.95	77.59	622.31	19.17	33.68	PASS
2925.00†	2877.08	-387.55	283.69	2875.97	2870.48	-835.78	-142.14	79.83	618.29	19.94	32.12	PASS
3025.00†	2974.93	-404.19	295.88	2959.32	2953.56	-832.68	-147.95	81.97	617.28	20.73	30.79	PASS
3125.00†	3072.78	-420.83	308.06	3049.05	3042.98	-830.36	-155.15	84.27	619.00	21.58	29.63	PASS
3225.00†	3170.63	-437.48	320.24	3156.03	3149.51	-826.64	-164.14	87.08	621.71	22.50	28.50	PASS
3325.00†	3268.48	-454.12	332.43	3272.60	3265.49	-818.88	-172.91	90.32	623.24	23.53	27.28	PASS
3425.00†	3366.33	-470.77	344.61	3395.06	3387.32	-807.93	-178.40	93.72	622.62	24.61	26.01	PASS
3525.00†	3464.18	-487.41	356.79	3513.94	3505.49	-795.05	-179.40	97.01	619.56	25.70	24.77	PASS
3625.00†	3562.03	-504.05	368.98	3634.66	3625.29	-780.99	-174.91	100.23	613.60	26.76	23.53	PASS
3725.00†	3659.88	-520.70	381.16	3730.35	3720.23	-770.72	-168.72	102.66	607.06	27.73	22.44	PASS
3825.00†	3757.73	-537.34	393.34	3814.08	3803.51	-763.89	-163.52	104.65	602.93	28.59	21.60	PASS
3925.00†	3855.57	-553.98	405.53	3900.36	3889.53	-758.42	-159.73	106.63	602.05	29.57	20.83	PASS
4025.00†	3953.42	-570.63	417.71	3987.74	3976.66	-752.22	-157.31	108.74	603.46	30.49	20.24	PASS
4125.00†	4051.27	-587.27	429.90	4074.28	4063.00	-746.45	-156.52	110.82	607.75	31.39	19.79	PASS
4225.00†	4149.12	-603.92	442.08	4167.51	4156.15	-742.57	-156.18	112.83	614.15	32.31	19.41	PASS

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 174 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: LEFFLER 41C-23-L AWB Offset Wellpath: LEFFLER 41C-23-L AWP

Facility: SEC.21-T06N-R66W Slot: SLOT#07 LEFFLER 41C-23-L (1921'FNL & 275'FEL SEC.21) Well: LEFFLER 41C-23-L Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
4325.00†	4246.97	-620.56	454.26	4258.78	4247.40	-741.57	-155.60	114.52	621.75	33.23	19.10	PASS	
4425.00†	4344.82	-637.20	466.45	4343.06	4331.68	-742.36	-156.26	115.90	631.66	34.13	18.88	PASS	
4525.00†	4442.67	-653.85	478.63	4417.96	4406.53	-743.29	-158.70	117.11	644.59	34.94	18.81	PASS	
4625.00†	4540.52	-670.49	490.81	4482.08	4470.37	-741.54	-164.19	118.37	662.57	35.63	18.96	PASS	
4725.00†	4638.37	-687.13	503.00	4573.59	4561.15	-736.63	-174.66	120.30	683.83	36.53	19.07	PASS	
4825.00†	4736.22	-703.78	515.18	4663.14	4649.85	-730.78	-185.47	122.18	706.47	37.41	19.23	PASS	
4925.00†	4834.07	-720.42	527.36	4746.45	4732.17	-724.22	-196.47	123.92	730.99	38.22	19.47	PASS	
5025.00†	4931.92	-737.07	539.55	4834.17	4818.59	-715.98	-209.00	125.75	757.37	39.09	19.71	PASS	
5125.00†	5029.77	-753.71	551.73	4946.38	4929.02	-703.28	-224.29	128.10	784.16	40.24	19.82	PASS	
5225.00†	5127.62	-770.35	563.91	5088.69	5069.59	-684.94	-236.50	131.03	807.05	41.74	19.65	PASS	
5325.00†	5225.47	-787.00	576.10	5206.22	5186.09	-670.19	-241.42	133.30	826.75	42.93	19.56	PASS	
5425.00†	5323.32	-803.64	588.28	5295.94	5275.35	-661.99	-244.88	134.75	846.47	43.86	19.60	PASS	
5525.00†	5421.17	-820.28	600.47	5385.29	5364.35	-655.43	-249.21	136.02	867.39	44.78	19.67	PASS	
5625.00†	5519.02	-836.93	612.65	5474.73	5453.32	-647.60	-254.01	137.31	889.53	45.69	19.76	PASS	
5725.00†	5616.87	-853.57	624.83	5560.42	5558.40	-637.47	-259.15	138.82	911.89	46.76	19.79	PASS	
5825.00†	5714.72	-870.22	637.02	5678.83	5656.20	-627.10	-262.60	140.24	933.72	47.76	19.83	PASS	
5925.00†	5812.57	-886.86	649.20	5762.89	5739.72	-618.22	-266.12	141.39	956.70	48.64	19.95	PASS	
6025.00†	5910.42	-903.50	661.38	5851.87	5828.14	-609.62	-271.16	142.49	981.21	49.56	20.07	PASS	
6125.00†	6008.27	-920.15	673.57	5959.41	5935.21	-601.97	-277.54	143.59	1005.57	50.67	20.11	PASS	
6225.00†	6106.12	-936.79	685.75	6063.97	6039.41	-594.92	-282.61	144.62	1029.10	51.74	20.15	PASS	
6325.00†	6203.97	-953.43	697.93	6163.91	6138.98	-587.24	-286.52	145.62	1052.37	52.77	20.20	PASS	
6425.00†	6301.82	-970.08	710.12	7998.56	7195.56	-529.53	709.25	-154.03	996.43	53.47	18.87	PASS	
6525.00†	6399.66	-986.72	722.30	8010.86	7195.53	-529.44	721.55	-152.86	917.88	56.68	16.39	PASS	
6605.93	6478.85	-1000.19	732.16	8020.73	7195.50	-529.38	731.41	-151.91	857.46	59.73	14.52	PASS	
6625.00†	6497.54	-1003.38	734.20	8022.75	7195.49	-529.36	733.43	-157.23	843.69	60.51	14.10	PASS	
6725.00†	6595.97	-1020.39	735.57	8023.67	7195.49	-529.36	734.36	162.74	774.94	64.83	12.07	PASS	
6825.00†	6693.34	-1037.59	721.30	8008.59	7195.54	-529.46	719.28	137.51	714.43	69.34	10.40	PASS	
6925.00†	6787.24	-1054.57	691.74	7978.11	7195.60	-529.66	688.79	126.97	665.05	73.54	9.12	PASS	
7025.00†	6875.37	-1070.91	647.62	7917.02	7195.52	-530.83	627.72	119.13	628.15	76.52	8.28	PASS	
7125.00†	6955.55	-1086.20	590.03	7834.89	7194.95	-535.37	545.72	111.66	602.23	78.02	7.78	PASS	
7225.00†	7025.81	-1100.06	520.38	7754.75	7194.38	-542.77	465.93	105.56	584.76	78.73	7.49	PASS	
7325.00†	7084.42	-1112.16	440.40	7679.08	7194.52	-549.86	390.59	100.68	575.14	79.08	7.33	PASS	
7425.00†	7129.94	-1122.20	352.04	7598.09	7194.87	-556.50	309.88	96.52	570.97	79.17	7.27	PASS	
7525.00†	7161.25	-1129.93	257.49	7512.05	7195.04	-562.24	224.03	93.41	569.68	79.36	7.23	PASS	
7625.00†	7177.57	-1135.16	159.08	7424.80	7188.72	-566.28	137.24	91.12	569.41	79.86	7.18	PASS	
7682.94	7180.00	-1136.99	101.24	7369.30	7175.20	-568.13	83.49	89.52	569.16	80.15	7.16	PASS	
7710.28†	7179.92	-1137.65	73.91	7345.00	7166.89	-568.90	60.68	88.69	569.05	80.34	7.14	PASS	
7725.00†	7179.88	-1138.00	59.19	7329.15	7160.75	-569.42	46.08	88.07	569.05	80.40	7.13	PASS	
7825.00†	7179.59	-1140.39	-40.78	7243.60	7119.55	-573.11	-28.68	83.95	570.58	81.24	7.08	PASS	
7848.80†	7179.52	-1140.96	-64.58	7231.05	7112.54	-573.55	-39.08	83.25	571.92	81.57	7.06	PASS	
7925.00†	7179.29	-1142.78	-140.75	7192.70	7090.08	-574.05	-70.15	81.03	580.00	81.84	7.14	PASS	
8025.00†	7179.00	-1145.17	-240.72	7150.01	7063.27	-573.02	-103.34	78.45	599.68	83.72	7.22	PASS	
8125.00†	7178.71	-1147.56	-340.69	7116.07	7040.41	-570.54	-128.30	76.34	630.23	84.86	7.48	PASS	
8225.00†	7178.42	-1149.95	-440.66	7085.90	7018.99	-567.00	-149.24	74.44	670.95	85.59	7.90	PASS	
8325.00†	7178.13	-1152.34	-540.63	7052.22	6993.87	-561.97	-171.09	72.31	720.45	85.95	8.44	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 175 of 202

**BAKER
HUGHES**
a GE company



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: LEFFLER 41C-23-L AWB Offset Wellpath: LEFFLER 41C-23-L AWP

Facility: SEC.21-T06N-R66W Slot: SLOT#07 LEFFLER 41C-23-L (1921'FNL & 275'FEL SEC.21) Well: LEFFLER 41C-23-L Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
8425.00†	7177.84	-1154.73	-640.61	7020.22	6968.66	-557.20	-190.20	70.26	776.96	86.41	9.06	PASS	
8525.00†	7177.55	-1157.12	-740.58	6993.22	6946.44	-553.25	-205.01	68.50	839.59	86.23	9.81	PASS	
8625.00†	7177.25	-1159.52	-840.55	6966.53	6923.70	-549.49	-218.47	66.77	907.42	86.10	10.62	PASS	
8725.00†	7176.96	-1161.91	-940.52	6942.34	6902.51	-546.39	-229.74	65.19	979.48	85.92	11.49	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: LEFFLER 41C-23-L AWB Offset Wellpath: LEFFLER 41C-23-L AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: LEFFLER 41C-23-L AWB Offset Wellpath: LEFFLER 41C-23-L AWP

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
13.5in Open Hole	25.00	1796.00	1771.00	28.00	1794.39	-599.65	-14.42	-576.08	-33.43

WELLPATH COMPOSITION - Offset Wellbore: LEFFLER 41C-23-L AWB Offset Wellpath: LEFFLER 41C-23-L AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
25.00	1736.00	Custom BHI NaviTrak (Standard Rotating+Axial Corr) (Rockies 0.03Gt model)	BHI NAVITRAK W/EM 13.5" (STD ROTATING, AXIAL, ROCKIES GT)<112-1736>	LEFFLER 41C-23-L AWB
1736.00	17813.00	Custom BHI AutoTrak Curve (IFR1, Short) (Rockies 0.03Gt model)	BHI ATC 8.5" (IFR, SHORT, ROCKIES GT)<1840-17813>	LEFFLER 41C-23-L AWB
17813.00	17837.00	Blind Drilling (std)	Projection to bit	LEFFLER 41C-23-L AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: LEFFLER 41C-23-L AWB Offset Wellpath: LEFFLER 41C-23-L AWP

MD Reference: PRECISION 562 (25') (RKB)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	25.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 176 of 202

**BAKER
HUGHES**
a GE company



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: HOOD 14N-22A-M OWB AWB Offset Wellpath: HOOD 14N-22A-M OWB AWP

Facility: SEC.20-T06N-R66W Slot: SLOT#09 HOOD 14N-22A-M (545'FSL & 1122'FEL SEC.20) Well: HOOD 14N-22A-M Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	8.00	25.00	-3902.88	-6165.01	-122.34	7296.56	25.57	296.55	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: HOOD 14N-22A-M OWB AWB Offset Wellpath: HOOD 14N-22A-M OWB AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: HOOD 14N-22A-M OWB AWB Offset Wellpath: HOOD 14N-22A-M OWB AWP

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
13.5in Open Hole	25.00	1766.00	1741.00	42.00	1779.11	-2378.73	-3758.48	-2368.27	-3740.13
9.625in Casing Surface	25.00	1763.00	1738.00	42.00	1776.13	-2378.73	-3758.48	-2368.28	-3740.24
8.5in Open Hole	1766.00	11901.00	10135.00	1779.11	6867.87	-2368.27	-3740.13	-2248.57	-1976.19

WELLPATH COMPOSITION - Offset Wellbore: HOOD 14N-22A-M OWB AWB Offset Wellpath: HOOD 14N-22A-M OWB AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
25.00	1705.00	Custom BHI NaviTrak (Standard Rotating+Axial Corr) (Rockies 0.03Gt model)	BHI NAVITRAK 13.5" (STD ROTATING, AXIAL, ROCKIES GT)<108-1705>	HOOD 14N-22A-M OWB AWB
1705.00	11901.00	Custom BHI AutoTrak Curve (IFR1, Short) (Rockies 0.03Gt model)	BHI ATC 8.5" (IFR, SHORT, ROCKIES GT)<1792-11901>	HOOD 14N-22A-M OWB AWB
11901.00	11923.00	Blind Drilling (std)	Projection to bit	HOOD 14N-22A-M OWB AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: HOOD 14N-22A-M OWB AWB Offset Wellpath: HOOD 14N-22A-M OWB AWP

MD Reference: PRECISION 562 (25') (RKB)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	25.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 177 of 202

**BAKER
HUGHES**
a GE company



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: HOOD 14N-22A-M S.T.#01 AWB Offset Wellpath: HOOD 14N-22A-M S.T.#01 AWP

Facility: SEC.20-T06N-R66W Slot: SLOT#09 HOOD 14N-22A-M (545'FSL & 1122'FEL SEC.20) Well: HOOD 14N-22A-M Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	8.00	25.00	-3902.88	-6165.01	-122.34	7296.56	25.57	296.55	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: HOOD 14N-22A-M S.T.#01 AWB Offset Wellpath: HOOD 14N-22A-M S.T.#01 AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: HOOD 14N-22A-M S.T.#01 AWB Offset Wellpath: HOOD 14N-22A-M S.T.#01 AWP

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
13.5in Open Hole	25.00	1766.00	1741.00	42.00	1779.11	-2378.73	-3758.48	-2368.27	-3740.13
9.625in Casing Surface	25.00	1763.00	1738.00	42.00	1776.13	-2378.73	-3758.48	-2368.28	-3740.24
8.5in Open Hole	1766.00	9486.00	7720.00	1779.11	6930.21	-2368.27	-3740.13	-2267.05	-2711.52
8.5in Open Hole	9486.00	15085.00	5599.00	6930.21	6933.12	-2267.05	-2711.52	-2264.78	-1007.24

WELLPATH COMPOSITION - Offset Wellbore: HOOD 14N-22A-M S.T.#01 AWB Offset Wellpath: HOOD 14N-22A-M S.T.#01 AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
25.00	1705.00	Custom BHI NaviTrak (Standard Rotating+Axial Corr) (Rockies 0.03Gt model)	BHI NAVITRAK 13.5" (STD ROTATING, AXIAL, ROCKIES GT)<108-1705>	HOOD 14N-22A-M OWB AWB
1705.00	9486.00	Custom BHI AutoTrak Curve (IFR1, Short) (Rockies 0.03Gt model)	BHI ATC 8.5" (IFR, SHORT, ROCKIES GT)<1792-11901>	HOOD 14N-22A-M OWB AWB
9486.00	9666.00	Custom BHI NaviTrak (Standard Rotating) (Rockies 0.03Gt model)	BHI NAVITRAK 8.5" (STD ROTATING, ROCKIES GT)<9577-9666>	HOOD 14N-22A-M S.T.#01 AWB
9666.00	15061.00	Custom BHI AutoTrak Curve (IFR1, Short) (Rockies 0.03Gt model)	BHI ATC 8.5" (IFR, SHORT, ROCKIES GT)<9754-15061>	HOOD 14N-22A-M S.T.#01 AWB
15061.00	15085.00	Blind Drilling (std)	Projection to bit	HOOD 14N-22A-M S.T.#01 AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: HOOD 14N-22A-M S.T.#01 AWB Offset Wellpath: HOOD 14N-22A-M S.T.#01 AWP

MD Reference: PRECISION 562 (25') (RKB)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	25.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 178 of 202

**BAKER
HUGHES**
a GE company



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: HOOD 14N-22B-M AWB Offset Wellpath: HOOD 14N-22B-M AWP

Facility: SEC.20-T06N-R66W Slot: SLOTS#10 HOOD 14N-22B-M (525'FSL & 1122'FEL SEC.20) Well: HOOD 14N-22B-M Threshold Value=1.00 † = interpolated/extrapolated station												
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status
25.00	25.00	0.00	0.00	8.00	25.00	-3922.94	-6164.76	-122.47	7307.10	25.57	296.98	PASS

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: HOOD 14N-22B-M AWB Offset Wellpath: HOOD 14N-22B-M AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: HOOD 14N-22B-M AWB Offset Wellpath: HOOD 14N-22B-M AWP

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
13.5in Open Hole	25.00	1760.00	1735.00	42.00	1773.17	-2390.95	-3758.34	-2389.62	-3733.68
9.625in Casing Surface	25.00	1774.00	1749.00	42.00	1787.10	-2390.95	-3758.34	-2389.57	-3733.27
8.5in Open Hole	1760.00	15173.00	13413.00	1773.17	7024.97	-2389.62	-3733.68	-2345.23	-1010.42

WELLPATH COMPOSITION - Offset Wellbore: HOOD 14N-22B-M AWB Offset Wellpath: HOOD 14N-22B-M AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
25.00	1720.00	Custom BHI NaviTrak (Standard Rotating+Axial Corr) (Rockies 0.03Gt model)	BHI NAVITRAK 13.5" (STD ROTATING, AXIAL, ROCKIES GT)<108-1720>	HOOD 14N-22B-M AWB
1720.00	15149.00	Custom BHI AutoTrak Curve (IFR1, Short) (Rockies 0.03Gt model)	BHI ATC 8.5" (IFR, SHORT, ROCKIES GT)<1792-15149>	HOOD 14N-22B-M AWB
15149.00	15173.00	Blind Drilling (std)	Projection to bit	HOOD 14N-22B-M AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: HOOD 14N-22B-M AWB Offset Wellpath: HOOD 14N-22B-M AWP

MD Reference: PRECISION 562 (25') (RKB)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	25.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 179 of 202

**BAKER
HUGHES**
a GE company



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. FRITZLER 11-21-4 AWB Offset Wellpath: EX. FRITZLER 11-21-4 AWP

Facility: SEC.21-T06N-66W Slot: SLOT#06 EX. FRITZLER 11-21-4 (645'FNL & 664'FWL, PR, NB/CD) Well: EX. FRITZLER 11-21-4 Threshold Value=1.00 † = interpolated/extrapolated station												
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status
25.00	25.00	0.00	0.00	2.98	24.98	212.79	-4394.10	-87.23	4399.25	50.17	89.39	PASS

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: EX. FRITZLER 11-21-4 AWB Offset Wellpath: EX. FRITZLER 11-21-4 AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

WELLPATH COMPOSITION - Offset Wellbore: EX. FRITZLER 11-21-4 AWB Offset Wellpath: EX. FRITZLER 11-21-4 AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
0.00	7412.00	ISCWSA MWD, Rev. 4 (Standard)	MS ENERGY SERVICES DIRECTIONAL SURVEY FROM COGCC <172-7412>	EX. FRITZLER 11-21-4 AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: EX. FRITZLER 11-21-4 AWB Offset Wellpath: EX. FRITZLER 11-21-4 AWP

MD Reference: Rig on SLOT#06 EX. FRITZLER 11-21-4 (645'FNL & 664'FWL, PR, NB/CD) (RT)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	0.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 180 of 202

**BAKER
HUGHES**
a GE company



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: BILLINGS #43-21 AWB Offset Wellpath: BILLINGS #43-21 AWP

Facility: SEC.21-T06N-R66W Slot: SLOT#01 EX:BILLINGS #43-21 (2270'FSL & 960'FEL SEC.21, PR, 7257'MD) Well: BILLINGS #43-21 Threshold Value=1.00 † = Interpolated/extrapolated station												
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status
25.00	25.00	0.00	0.00	-15.00	25.00	-2112.66	-668.29	-162.45	2215.84	25.57	90.03	PASS

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: BILLINGS #43-21 AWB Offset Wellpath: BILLINGS #43-21 AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: BILLINGS #43-21 AWB Offset Wellpath: BILLINGS #43-21 AWP

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
12.25in Open Hole	0.00	326.00	326.00	15.00	340.99	-1287.87	-407.41	-1287.83	-408.23
8.625in Casing Surface	0.00	326.00	326.00	15.00	340.99	-1287.87	-407.41	-1287.83	-408.23
7.875in Open Hole	326.00	7257.00	6931.00	340.99	7270.79	-1287.83	-408.23	-1303.89	-429.22
3.5in Casing Production	0.00	7257.00	7257.00	15.00	7270.79	-1287.87	-407.41	-1303.89	-429.22

WELLPATH COMPOSITION - Offset Wellbore: BILLINGS #43-21 AWB Offset Wellpath: BILLINGS #43-21 AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
0.00	7050.00	ISWWSA MWD, Rev. 4 (Standard)	MS SURVEYS FROM SYNERGY <100-7050>	BILLINGS #43-21 AWB
7050.00	7257.00	Drift Indicator - Inclination Only (Actual Survey)	DRIFT INDICATOR TO TD <7257' FROM CO WEBSITE>	BILLINGS #43-21 AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: BILLINGS #43-21 AWB Offset Wellpath: BILLINGS #43-21 AWP

MD Reference: Rig on SLOT#01 EX:BILLINGS #43-21 (2270'FSL & 960'FEL SEC.21, PR, 7257'MD) (RT)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	0.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 181 of 202

**BAKER
HUGHES**
a GE company



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: HOOD 36C-22-M AWB Offset Wellpath: HOOD 36C-22-M AWP

Facility: SEC.20-T06N-R66W Slot: SLOTH11 HOOD 36C-22-M (505'FSL & 1122'FEL SEC.20) Well: HOOD 36C-22-M Threshold Value=1.00 † = interpolated/extrapolated station												
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status
25.00	25.00	0.00	0.00	8.00	25.00	-3942.98	-6164.77	-122.60	7317.89	25.57	297.41	PASS

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: HOOD 36C-22-M AWB Offset Wellpath: HOOD 36C-22-M AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: HOOD 36C-22-M AWB Offset Wellpath: HOOD 36C-22-M AWP

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
13.5in Open Hole	25.00	1765.00	1740.00	42.00	1777.19	-2403.17	-3758.34	-2408.03	-3727.26
9.625in Casing Surface	25.00	1779.00	1754.00	42.00	1791.13	-2403.17	-3758.34	-2408.09	-3726.84
8.5in Open Hole	1765.00	15339.00	13574.00	1777.19	7211.20	-2408.03	-3727.26	-2433.71	-1006.33

WELLPATH COMPOSITION - Offset Wellbore: HOOD 36C-22-M AWB Offset Wellpath: HOOD 36C-22-M AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
25.00	1725.00	Custom BHI NaviTrak (Standard Rotating+Axial Corr) (Rockies 0.03Gt model)	BHI NAVITRAK 13.5" (STD ROTATING, AXIAL, ROCKIES GT)<108-1725>	HOOD 36C-22-M AWB
1725.00	15315.00	Custom BHI AutoTrak Curve (IFR1, Short) (Rockies 0.03Gt model)	BHI ATC 8.5" (IFR, SHORT, ROCKIES GT)<1793-15315>	HOOD 36C-22-M AWB
15315.00	15339.00	Blind Drilling (std)	Projection to bit	HOOD 36C-22-M AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: HOOD 36C-22-M AWB Offset Wellpath: HOOD 36C-22-M AWP

MD Reference: PRECISION 562 (25') (RKB)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	25.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 182 of 202

**BAKER
HUGHES**
a GE company



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: KOHLER #21-10 AWB Offset Wellpath: KOHLER #21-10 AWP

Facility: SEC.21-T06N-R66W Slot: SLOT#02 EX:KOHLER #21-10 (1976'FSL & 1987'FEL SEC.21, PR, 7281'MD) Well: KOHLER #21-10 Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	-6.00	25.00	-2383.66	-1733.62	-143.97	2947.42	25.57	119.77	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: KOHLER #21-10 AWB Offset Wellpath: KOHLER #21-10 AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: KOHLER #21-10 AWB Offset Wellpath: KOHLER #21-10 AWP

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
9.875in Casing Surface	0.00	418.00	418.00	6.00	423.99	-1453.04	-1056.86	-1453.60	-1056.79
6.25in Open Hole	0.00	7278.00	7278.00	6.00	7282.82	-1453.04	-1056.86	-1461.88	-1072.71
4.5in Casing Production	0.00	7278.00	7278.00	6.00	7282.82	-1453.04	-1056.86	-1461.88	-1072.71

WELLPATH COMPOSITION - Offset Wellbore: KOHLER #21-10 AWB Offset Wellpath: KOHLER #21-10 AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
0.00	7000.00	VESSI GyroFlex v4	VES GYRO SURVEYS FROM SYNERGY, GRID TO TRUE CONVERSION <100-7000>	KOHLER #21-10 AWB
7000.00	7281.00	Drift Indicator - Inclination Only (Actual Survey)	DRIFT INDICATOR TO TD <7281' FROM CO WEBSITE>	KOHLER #21-10 AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: KOHLER #21-10 AWB Offset Wellpath: KOHLER #21-10 AWP

MD Reference: Rig on SLOT#02 EX:KOHLER #21-10 (1976'FSL & 1987'FEL SEC.21, PR, 7281'MD) (RT)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	0.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 183 of 202

**BAKER
HUGHES**
a GE company



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: HOOD 36N-22C-M AWB Offset Wellpath: HOOD 36N-22C-M AWP

Facility: SEC.20-T06N-R66W Slot: SLOT#12 HOOD 36N-22C-M (485'FSL & 1122'FEL SEC.20) Well: HOOD 36N-22C-M Threshold Value=1.00 † = interpolated/extrapolated station												
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status
25.00	25.00	0.00	0.00	8.00	25.00	-3963.01	-6164.77	-122.74	7328.71	25.57	297.85	PASS

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: HOOD 36N-22C-M AWB Offset Wellpath: HOOD 36N-22C-M AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: HOOD 36N-22C-M AWB Offset Wellpath: HOOD 36N-22C-M AWP

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
13.5in Open Hole	25.00	1755.00	1730.00	42.00	1764.42	-2415.38	-3758.35	-2438.59	-3724.37
9.625in Casing Surface	25.00	1767.00	1742.00	42.00	1776.34	-2415.38	-3758.35	-2438.78	-3724.00
8.5in Open Hole	1755.00	15267.00	13512.00	1764.42	7112.20	-2438.59	-3724.37	-2503.98	-1009.26

WELLPATH COMPOSITION - Offset Wellbore: HOOD 36N-22C-M AWB Offset Wellpath: HOOD 36N-22C-M AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
25.00	1714.00	Custom BHI NaviTrak (Standard Rotating+Axial Corr) (Rockies 0.03Gt model)	BHI NAVITRAK 13.5" (STD ROTATING, AXIAL, ROCKIES GT)<107-1714>	HOOD 36N-22C-M AWB
1714.00	15243.00	Custom BHI AutoTrak Curve (IFR1, Short) (Rockies 0.03Gt model)	BHI ATC 8.5" (IFR, SHORT, ROCKIES GT)<1804-15243>	HOOD 36N-22C-M AWB
15243.00	15267.00	Blind Drilling (std)	Projection to bit	HOOD 36N-22C-M AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: HOOD 36N-22C-M AWB Offset Wellpath: HOOD 36N-22C-M AWP

MD Reference: PRECISION 562 (25') (RKB)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	25.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 184 of 202

**BAKER
HUGHES**
a GE company



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: LEFFLER 1 #21-2 AWB Offset Wellpath: LEFFLER 1 #21-2 AWP

Facility: SEC.21-T06N-R66W Slot: SLOT#04 EX:LEFFLER 1 #21-2 (660'FNL & 1880'FEL SEC.21,PR,7340'MD) Well: LEFFLER 1 #21-2 Threshold Value=1.00 † = interpolated/extrapolated station												
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status
25.00	25.00	0.00	0.00	5.28	24.28	246.34	-1646.92	-81.49	1665.24	50.13	33.82	PASS

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: LEFFLER 1 #21-2 AWB Offset Wellpath: LEFFLER 1 #21-2 AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: LEFFLER 1 #21-2 AWB Offset Wellpath: LEFFLER 1 #21-2 AWP

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
12.25in Open Hole	0.00	452.00	452.00	-6.00	445.94	150.20	-1003.95	152.19	-1004.67
8.625in Casing Surface	0.00	452.00	452.00	-6.00	445.94	150.20	-1003.95	152.19	-1004.67
7.875in Open Hole	452.00	7316.00	6864.00	445.94	7308.29	152.19	-1004.67	148.32	-1036.56
4.5in Casing Production	0.00	7316.00	7316.00	-6.00	7308.29	150.20	-1003.95	148.32	-1036.56

WELLPATH COMPOSITION - Offset Wellbore: LEFFLER 1 #21-2 AWB Offset Wellpath: LEFFLER 1 #21-2 AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
0.00	7100.00	VESSI GyroFlex v4	VES GYRO SURVEYS FROM SRC (ADJ FROM GRID TO TRUE, +.47 AZI)<100-7100>	LEFFLER 1 #21-2 AWB
7100.00	7340.00	Drift Indicator - Inclination Only (Actual Survey)	DRIFT INDICATOR TO TD (7340' FROM CO WEBSITE)	LEFFLER 1 #21-2 AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: LEFFLER 1 #21-2 AWB Offset Wellpath: LEFFLER 1 #21-2 AWP

MD Reference: Rig on SLOT#04 EX:LEFFLER 1 #21-2 (660'FNL & 1880'FEL SEC.21,PR,7340'MD) (RT)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	0.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 185 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: LEFFLER 41N-23C-L AWB Offset Wellpath: LEFFLER 41N-23C-L AWP

Facility: SEC.21-T06N-R66W		Slot: SLOT#06 LEFFLER 41N-23C-L (1901'FNL & 275'FEL SEC.21)		Well: LEFFLER 41N-23C-L		Threshold Value=1.00		† = Interpolated/extrapolated station					
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	22.00	25.00	-963.64	-23.65	-178.59	963.93	1.26	3209.88	PASS	
125.00†	125.00	0.00	0.00	121.78	124.77	-963.66	-22.82	-178.64	963.93	2.04	1052.22	PASS	
225.00†	225.00	0.00	0.00	220.24	223.23	-963.84	-21.85	-178.70	964.09	2.67	622.61	PASS	
300.00	300.00	0.00	0.00	299.22	302.20	-963.79	-22.59	-178.66	964.06	3.74	367.67	PASS	
325.00†	325.00	-0.09	0.06	324.79	327.76	-963.71	-23.22	37.59	963.91	4.16	316.72	PASS	
425.00†	424.96	-2.20	1.61	423.20	426.09	-963.30	-27.27	37.95	961.53	5.49	219.88	PASS	
525.00†	524.77	-7.13	5.22	521.86	524.62	-963.21	-32.24	38.53	956.82	6.41	180.77	PASS	
625.00†	624.30	-14.86	10.88	639.19	641.84	-962.18	-37.33	39.38	948.71	7.24	154.85	PASS	
725.00†	723.44	-25.39	18.59	777.03	779.49	-956.24	-40.63	40.49	934.41	8.27	130.58	PASS	
825.00†	822.07	-38.71	28.34	898.31	900.38	-947.41	-44.75	41.89	914.99	9.18	113.41	PASS	
895.18	890.91	-49.71	36.39	978.34	979.92	-939.55	-48.64	43.10	898.31	9.74	104.10	PASS	
925.00†	920.09	-54.67	40.02	1010.33	1011.68	-936.14	-50.37	43.53	890.81	9.95	100.87	PASS	
1025.00†	1017.94	-71.32	52.20	1105.53	1106.15	-925.72	-55.86	44.90	865.72	10.44	92.79	PASS	
1125.00†	1115.79	-87.96	64.39	1206.67	1206.45	-914.22	-61.98	46.46	840.77	10.98	85.17	PASS	
1225.00†	1213.64	-104.60	76.57	1308.53	1307.37	-901.67	-67.85	48.13	815.45	11.53	78.26	PASS	
1325.00†	1311.48	-121.25	88.76	1402.83	1400.76	-889.69	-73.00	49.75	790.34	12.17	71.47	PASS	
1425.00†	1409.33	-137.89	100.94	1492.92	1489.99	-878.41	-78.22	51.41	766.14	12.77	65.67	PASS	
1525.00†	1507.18	-154.53	113.12	1580.01	1576.38	-868.36	-82.55	53.03	743.38	13.43	60.32	PASS	
1625.00†	1605.03	-171.18	125.31	1667.89	1663.68	-859.23	-86.95	54.74	722.44	14.05	55.81	PASS	
1725.00†	1702.88	-187.82	137.48	1763.57	1758.79	-849.78	-91.46	56.66	702.66	14.71	51.63	PASS	
1825.00†	1800.73	-204.47	149.67	1863.67	1858.30	-839.69	-95.07	58.70	683.18	14.65	48.95	PASS	
1925.00†	1898.58	-221.11	161.86	1957.24	1951.29	-829.87	-98.84	60.76	664.32	14.83	46.99	PASS	
2025.00†	1996.43	-237.75	174.04	2045.72	2039.16	-820.71	-103.43	62.88	647.03	15.10	44.90	PASS	
2125.00†	2094.28	-254.40	186.22	2137.69	2130.55	-811.80	-108.69	65.19	631.65	15.46	42.76	PASS	
2225.00†	2192.13	-271.04	198.41	2231.84	2224.11	-802.79	-114.35	67.69	617.74	15.89	40.63	PASS	
2325.00†	2289.98	-287.68	210.59	2328.47	2320.10	-793.45	-120.19	70.35	605.07	16.40	38.52	PASS	
2425.00†	2387.83	-304.33	222.77	2426.63	2417.61	-783.60	-125.82	73.16	593.39	16.98	36.43	PASS	
2525.00†	2485.68	-320.97	234.96	2521.57	2511.89	-773.85	-131.14	75.98	582.94	17.61	34.45	PASS	
2625.00†	2583.53	-337.62	247.14	2615.74	2605.45	-764.36	-136.26	78.83	574.10	18.28	32.62	PASS	
2725.00†	2681.38	-354.26	259.33	2710.51	2699.58	-754.86	-141.57	81.79	567.04	19.00	30.95	PASS	
2825.00†	2779.23	-370.90	271.51	2808.63	2797.05	-744.85	-146.73	84.90	561.31	19.77	29.41	PASS	
2925.00†	2877.08	-387.55	283.69	2905.97	2893.74	-734.58	-151.50	88.04	556.87	20.57	28.00	PASS	
3025.00†	2974.93	-404.19	295.88	3003.01	2990.12	-724.24	-155.79	91.19	553.77	21.39	26.75	PASS	
3125.00†	3072.78	-420.83	308.06	3100.96	3087.44	-713.79	-159.66	94.37	552.08	22.23	25.62	PASS	
3225.00†	3170.63	-437.48	320.24	3200.89	3186.72	-702.84	-162.91	97.61	551.46	23.09	24.61	PASS	
3252.97†	3197.99	-442.13	323.65	3227.09	3212.75	-699.92	-163.61	98.46	551.45	23.33	24.35	PASS	
3325.00†	3268.48	-454.12	332.43	3297.31	3282.50	-692.09	-165.40	100.73	551.95	23.96	23.71	PASS	
3425.00†	3366.33	-470.77	344.61	3394.26	3378.81	-681.22	-167.72	103.85	554.01	24.83	22.94	PASS	
3525.00†	3464.18	-487.41	356.79	3488.63	3472.55	-670.54	-169.86	106.86	557.65	25.70	22.29	PASS	
3625.00†	3562.03	-504.05	368.98	3592.84	3576.07	-658.66	-171.49	110.12	562.32	26.62	21.68	PASS	
3725.00†	3659.88	-520.70	381.16	3694.60	3677.14	-646.89	-171.42	113.22	567.07	27.54	21.11	PASS	
3825.00†	3757.73	-537.34	393.34	3784.80	3766.73	-636.42	-171.31	115.93	573.35	28.42	20.67	PASS	
3925.00†	3855.57	-553.98	405.53	3869.93	3851.29	-626.64	-172.42	118.44	582.51	29.26	20.38	PASS	
4025.00†	3953.42	-570.63	417.71	3954.64	3935.43	-617.16	-174.98	120.85	594.79	30.11	20.21	PASS	
4125.00†	4051.27	-587.27	429.90	4039.84	4020.07	-608.28	-178.98	123.14	610.04	30.95	20.15	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 186 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: LEFFLER 41N-23C-L AWB Offset Wellpath: LEFFLER 41N-23C-L AWP

Facility: SEC.21-T06N-R66W Slot: SLOT#06 LEFFLER 41N-23C-L (1901'FNL & 275'FEL SEC.21)						Well: LEFFLER 41N-23C-L		Threshold Value=1.00 † = interpolated/extrapolated station				
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status
4225.00†	4149.12	-603.92	442.08	4128.58	4108.23	-599.60	-184.20	125.37	627.63	31.80	20.16	PASS
4325.00†	4246.97	-620.56	454.26	4212.45	4191.56	-592.32	-190.34	127.29	647.60	32.61	20.28	PASS
4425.00†	4344.82	-637.20	466.45	4303.88	4282.37	-585.08	-198.10	129.21	669.51	33.50	20.40	PASS
4525.00†	4442.67	-653.85	478.63	4404.08	4381.89	-576.89	-206.42	131.20	692.04	34.45	20.49	PASS
4625.00†	4540.52	-670.49	490.81	4504.52	4481.65	-567.92	-213.80	133.14	714.47	35.41	20.57	PASS
4725.00†	4638.37	-687.13	503.00	4597.31	4573.83	-559.36	-220.18	134.86	737.21	36.32	20.68	PASS
4825.00†	4736.22	-703.78	515.18	4683.82	4659.73	-551.96	-227.16	136.31	761.56	37.17	20.87	PASS
4925.00†	4834.07	-720.42	527.36	4779.93	4755.20	-544.76	-235.56	137.74	786.85	38.12	21.01	PASS
5025.00†	4931.92	-737.07	539.55	4887.59	4862.14	-535.46	-243.78	139.35	811.86	39.18	21.08	PASS
5125.00†	5029.77	-753.71	551.73	5003.15	4976.95	-523.58	-249.44	141.15	835.24	40.32	21.07	PASS
5225.00†	5127.62	-770.35	563.91	5108.69	5081.77	-511.67	-252.15	142.81	857.31	41.37	21.07	PASS
5325.00†	5225.47	-787.00	576.10	5204.60	5176.99	-500.27	-253.81	144.29	879.38	42.32	21.12	PASS
5425.00†	5323.32	-803.64	588.28	5297.22	5268.96	-489.47	-255.52	145.64	902.03	43.25	21.19	PASS
5525.00†	5421.17	-820.28	600.47	5381.69	5352.83	-479.68	-257.80	146.80	925.90	44.11	21.31	PASS
5625.00†	5519.02	-836.93	612.65	5467.81	5438.33	-469.93	-261.20	147.89	951.22	45.00	21.46	PASS
5725.00†	5616.87	-853.57	624.83	5567.43	5537.25	-459.01	-265.54	149.06	977.13	46.02	21.55	PASS
5825.00†	5714.72	-870.22	637.02	5669.90	5639.00	-447.35	-268.86	150.25	1002.58	47.06	21.62	PASS
5925.00†	5812.57	-886.86	649.20	5761.28	5729.73	-436.82	-271.68	151.27	1028.31	48.00	21.73	PASS
6025.00†	5910.42	-903.50	661.38	5850.30	5818.11	-426.67	-274.92	152.20	1054.77	48.92	21.86	PASS
6125.00†	6008.27	-920.15	673.57	5939.72	5906.88	-416.63	-278.89	153.06	1082.12	49.86	22.00	PASS
6225.00†	6106.12	-936.79	685.75	6037.18	6003.61	-405.67	-283.34	153.96	1109.84	50.87	22.11	PASS
6325.00†	6203.97	-953.43	697.93	6134.64	6100.05	-394.72	-287.82	154.90	1138.11	51.90	22.21	PASS
6425.00†	6301.82	-970.08	710.12	6232.10	6196.46	-383.85	-292.33	155.88	1166.34	52.95	22.29	PASS
6525.00†	6399.66	-986.72	722.30	6329.56	6292.88	-373.05	-296.87	156.90	1194.54	54.02	22.35	PASS
6605.93	6478.85	-1000.19	732.16	6426.99	6389.29	-362.32	-301.40	157.95	1222.71	55.10	22.39	PASS
6625.00†	6497.54	-1003.38	734.20	6486.95	6408.90	-351.75	-305.97	159.03	1250.84	56.19	22.41	PASS
6725.00†	6595.97	-1020.39	735.57	6584.37	6506.32	-341.25	-310.57	160.14	1278.94	57.29	22.42	PASS
6825.00†	6693.34	-1037.59	721.30	6681.74	6603.69	-330.80	-315.19	161.27	1307.01	58.39	22.42	PASS
6925.00†	6787.24	-1054.57	691.74	6779.10	6699.99	-320.40	-319.86	162.41	1335.05	59.49	22.41	PASS
7025.00†	6875.37	-1070.91	647.62	6876.46	6797.32	-310.05	-324.57	163.56	1363.07	60.59	22.38	PASS
7125.00†	6955.55	-1086.20	590.03	6973.81	6894.64	-300.36	-329.26	164.71	1391.07	61.69	22.33	PASS
7133.21†	6961.72	-1087.39	584.74	6980.00	6900.81	-299.57	-330.07	164.86	1399.07	61.84	22.32	PASS
7225.00†	7025.81	-1100.06	520.38	7077.16	7003.97	-289.87	-334.82	166.01	1427.04	62.94	22.25	PASS
7325.00†	7084.42	-1112.16	440.40	7174.26	7101.07	-280.17	-339.57	167.16	1455.00	64.04	22.16	PASS
7425.00†	7129.94	-1122.20	352.04	7271.30	7198.11	-270.47	-344.32	168.31	1482.96	65.14	22.05	PASS
7525.00†	7161.25	-1129.93	257.49	7368.34	7295.15	-260.77	-349.07	169.46	1510.92	66.24	21.93	PASS
7625.00†	7177.57	-1135.16	159.08	7384.66	7311.47	-251.07	-353.82	170.61	1538.88	67.34	21.80	PASS
7682.94	7180.00	-1136.99	101.24	7397.09	7323.80	-241.37	-358.57	171.76	1566.84	68.44	21.66	PASS
7725.00†	7179.88	-1138.00	59.19	7396.96	7323.80	-241.37	-358.57	171.76	1566.84	68.44	21.66	PASS
7825.00†	7179.59	-1140.39	-40.78	7396.67	7323.51	-241.68	-358.88	171.76	1566.55	68.44	21.66	PASS
7925.00†	7179.29	-1142.78	-140.75	7396.37	7323.21	-241.98	-359.18	171.76	1566.25	68.44	21.66	PASS
8025.00†	7179.00	-1145.17	-240.72	7396.08	7322.92	-242.28	-359.48	171.76	1565.96	68.44	21.66	PASS
8125.00†	7178.71	-1147.56	-340.69	7395.79	7322.63	-242.58	-359.78	171.76	1565.66	68.44	21.66	PASS
8225.00†	7178.42	-1149.95	-440.66	7395.50	7322.34	-242.88	-360.08	171.76	1565.37	68.44	21.66	PASS
8325.00†	7178.13	-1152.34	-540.63	7395.21	7322.05	-243.18	-360.38	171.76	1565.07	68.44	21.66	PASS

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 187 of 202

**BAKER
HUGHES**
a GE company



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

POSITIONAL UNCERTAINTY - Offset Wellbore: LEFFLER 41N-23C-L AWB Offset Wellpath: LEFFLER 41N-23C-L AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: LEFFLER 41N-23C-L AWB Offset Wellpath: LEFFLER 41N-23C-L AWP

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
13.5in Open Hole	25.00	1803.00	1778.00	28.00	1797.99	-587.43	-14.42	-551.53	-35.56

WELLPATH COMPOSITION - Offset Wellbore: LEFFLER 41N-23C-L AWB Offset Wellpath: LEFFLER 41N-23C-L AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
25.00	1741.00	Custom BHI NaviTrak (Standard Rotating+Axial Cor) (Rockies 0.03Gt model)	BHI NAVITRAK W/EM 13.5" (STD ROTATING, AXIAL, ROCKIES GT)<112-1741>	LEFFLER 41N-23C-L AWB
1741.00	17721.00	Custom BHI AutoTrak Curve (IFR1, Short) (Rockies 0.03Gt model)	Custom BHI AutoTrak Curve (IFR1, Short) (Rockies 0.03Gt model) <1838'-17721'>	LEFFLER 41N-23C-L AWB
17721.00	17745.00	Blind Drilling (std)	Projection to bit	LEFFLER 41N-23C-L AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: LEFFLER 41N-23C-L AWB Offset Wellpath: LEFFLER 41N-23C-L AWP

MD Reference: PRECISION 562 (25') (RKB)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	25.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 188 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: LEFFLER 1C-23-L AWP Offset Wellpath: LEFFLER 1C-23-L AWP

Facility: SEC.21-T06N-R66W				Slot: SLOT#05 LEFFLER 1C-23-L (1881'FNL & 275'FEL SEC.21)				Well: LEFFLER 1C-23-L		Threshold Value=1.00 † = interpolated/extrapolated station			
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	22.00	25.00	-943.60	-23.65	-178.56	943.90	1.26	3143.11	PASS	
125.00†	125.00	0.00	0.00	139.95	142.94	-942.00	-22.99	-178.60	942.45	2.46	705.65	PASS	
225.00†	225.00	0.00	0.00	231.62	234.59	-940.86	-22.34	-178.64	941.18	3.25	441.56	PASS	
300.00	300.00	0.00	0.00	307.44	310.40	-939.97	-22.10	-178.65	940.29	3.67	368.34	PASS	
325.00†	325.00	-0.09	0.06	329.40	332.37	-939.76	-22.07	37.56	939.96	3.79	351.68	PASS	
425.00†	424.96	-2.20	1.61	424.44	427.41	-939.49	-22.23	37.69	937.60	4.49	278.01	PASS	
525.00†	524.77	-7.13	5.22	530.86	533.82	-938.82	-23.51	38.08	932.18	5.53	211.32	PASS	
625.00†	624.30	-14.86	10.88	644.59	647.48	-936.84	-26.51	38.81	923.03	6.47	172.60	PASS	
725.00†	723.44	-25.39	18.59	743.44	746.22	-934.13	-30.49	39.74	910.34	7.32	146.85	PASS	
825.00†	822.07	-38.71	28.34	854.31	856.91	-930.20	-35.40	41.04	894.44	8.12	127.78	PASS	
895.18	890.91	-49.71	36.39	928.91	931.36	-926.84	-38.64	42.08	881.26	8.65	117.04	PASS	
925.00†	920.09	-54.67	40.02	970.75	973.09	-924.44	-40.48	42.60	875.09	8.89	112.49	PASS	
1025.00†	1017.94	-71.32	52.20	1105.93	1107.55	-912.38	-47.22	44.45	851.65	9.86	97.35	PASS	
1125.00†	1115.79	-87.96	64.39	1209.44	1210.21	-900.23	-52.52	46.01	826.06	10.58	87.22	PASS	
1225.00†	1213.64	-104.60	76.57	1307.14	1307.02	-887.97	-57.21	47.55	800.18	11.14	79.81	PASS	
1325.00†	1311.48	-121.25	88.76	1398.60	1397.66	-876.62	-61.69	49.10	775.02	11.80	72.49	PASS	
1425.00†	1409.33	-137.89	100.94	1492.69	1490.92	-865.05	-66.36	50.79	750.61	12.30	67.05	PASS	
1525.00†	1507.18	-154.53	113.12	1586.01	1583.45	-853.73	-70.73	52.54	726.98	12.96	61.32	PASS	
1625.00†	1605.03	-171.18	125.31	1678.01	1674.69	-842.78	-74.98	54.37	704.29	13.61	56.31	PASS	
1725.00†	1702.88	-187.82	137.49	1767.01	1763.00	-832.58	-79.48	56.26	682.94	14.24	52.00	PASS	
1825.00†	1800.73	-204.47	149.67	1853.03	1848.47	-823.85	-83.61	58.14	663.58	14.20	49.13	PASS	
1925.00†	1898.58	-221.11	161.86	1972.12	1966.72	-811.01	-89.21	60.91	644.72	14.44	46.88	PASS	
2025.00†	1996.43	-237.75	174.04	2062.08	2055.73	-798.96	-94.09	63.27	624.79	14.90	43.99	PASS	
2125.00†	2094.28	-254.40	186.22	2151.06	2143.80	-787.45	-99.52	65.77	606.84	15.24	41.71	PASS	
2225.00†	2192.13	-271.04	198.41	2241.55	2233.37	-776.15	-105.64	68.46	591.00	15.67	39.47	PASS	
2325.00†	2289.98	-287.68	210.59	2336.51	2327.37	-764.39	-112.26	71.43	576.95	16.17	37.28	PASS	
2425.00†	2387.83	-304.33	222.77	2429.77	2419.66	-752.72	-118.90	74.49	564.63	16.73	35.20	PASS	
2525.00†	2485.68	-320.97	234.96	2525.19	2514.11	-740.92	-125.53	77.72	554.18	17.36	33.25	PASS	
2625.00†	2583.53	-337.62	247.14	2626.56	2614.46	-727.91	-131.75	81.22	544.83	18.06	31.37	PASS	
2725.00†	2681.38	-354.26	259.33	2727.23	2714.04	-714.15	-136.80	84.80	536.20	18.81	29.58	PASS	
2825.00†	2779.23	-370.90	271.51	2826.22	2812.00	-700.36	-140.65	88.35	528.67	19.59	27.96	PASS	
2925.00†	2877.08	-387.55	283.69	2924.58	2909.43	-687.12	-142.97	91.84	522.33	20.39	26.50	PASS	
3025.00†	2974.93	-404.19	295.88	3022.65	3006.61	-673.97	-144.44	95.33	517.36	21.21	25.19	PASS	
3125.00†	3072.78	-420.83	308.06	3117.02	3100.08	-661.03	-145.56	98.75	514.01	22.05	24.06	PASS	
3183.12†	3129.65	-430.51	315.14	3168.03	3150.60	-654.04	-146.46	100.62	513.30	22.53	23.49	PASS	
3225.00†	3170.63	-437.48	320.24	3200.05	3182.32	-649.80	-147.40	101.80	513.72	22.86	23.15	PASS	
3325.00†	3268.48	-454.12	332.43	3292.47	3273.91	-637.98	-151.03	105.19	517.26	23.75	22.41	PASS	
3425.00†	3366.33	-470.77	344.61	3391.38	3371.95	-625.31	-154.32	108.74	522.35	24.64	21.79	PASS	
3525.00†	3464.18	-487.41	356.79	3491.35	3471.01	-612.11	-156.74	112.26	528.51	25.53	21.26	PASS	
3625.00†	3562.03	-504.05	368.98	3588.84	3567.61	-599.02	-158.35	115.62	535.84	26.42	20.82	PASS	
3725.00†	3659.88	-520.70	381.16	3683.02	3660.95	-586.53	-159.51	118.76	544.67	27.28	20.47	PASS	
3825.00†	3757.73	-537.34	393.34	3765.00	3742.20	-575.89	-161.58	121.39	556.48	28.10	20.29	PASS	
3925.00†	3855.57	-553.98	405.53	3845.45	3821.95	-566.01	-165.50	123.83	572.15	28.91	20.26	PASS	
4025.00†	3953.42	-570.63	417.71	3928.27	3904.02	-556.61	-171.37	126.16	591.31	29.74	20.35	PASS	
4125.00†	4051.27	-587.27	429.90	4017.29	3992.23	-547.28	-179.00	128.45	613.06	30.59	20.49	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 189 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: LEFFLER 1C-23-L AWP Offset Wellpath: LEFFLER 1C-23-L AWP

Facility: SEC.21-T06N-R66W Slot: SLOT#05 LEFFLER 1C-23-L (1881'FNL & 275'FEL SEC.21)						Well: LEFFLER 1C-23-L		Threshold Value=1.00 † = interpolated/extrapolated station						
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status		
4225.00†	4149.12	-603.92	442.08	4110.78	4084.89	-538.24	-187.50	130.62	636.24	31.47	20.66	PASS		
4325.00†	4246.97	-620.56	454.26	4199.79	4173.08	-529.62	-195.92	132.56	660.65	32.32	20.88	PASS		
4425.00†	4344.82	-637.20	466.45	4301.32	4273.62	-519.15	-205.39	134.66	685.84	33.29	21.03	PASS		
4525.00†	4442.67	-653.85	478.63	4402.25	4373.59	-507.90	-213.54	136.69	710.75	34.27	21.16	PASS		
4625.00†	4540.52	-670.49	490.81	4502.85	4473.22	-495.75	-220.21	138.67	735.27	35.24	21.27	PASS		
4725.00†	4638.37	-687.13	503.00	4590.24	4559.77	-485.18	-226.16	140.28	760.68	36.11	21.47	PASS		
4825.00†	4736.22	-703.78	515.18	4676.23	4644.91	-475.45	-233.21	141.71	787.75	36.97	21.71	PASS		
4925.00†	4834.07	-720.42	527.36	4771.53	4739.27	-464.96	-241.55	143.15	815.76	37.92	21.90	PASS		
5025.00†	4931.92	-737.07	539.55	4881.63	4848.29	-452.03	-249.84	144.79	843.43	39.02	22.00	PASS		
5125.00†	5029.77	-753.71	551.73	4991.17	4956.75	-437.51	-254.73	146.49	869.31	40.12	22.04	PASS		
5225.00†	5127.62	-770.35	563.91	5084.05	5048.70	-424.84	-258.04	147.89	895.11	41.06	22.16	PASS		
5325.00†	5225.47	-787.00	576.10	5176.35	5140.05	-412.14	-261.60	149.20	921.71	42.00	22.31	PASS		
5425.00†	5323.32	-803.64	588.28	5264.55	5227.36	-400.18	-265.41	150.37	949.10	42.90	22.48	PASS		
5525.00†	5421.17	-820.28	600.47	5352.54	5314.47	-388.78	-270.14	151.43	977.52	43.80	22.67	PASS		
5625.00†	5519.02	-836.93	612.65	5437.11	5398.25	-378.68	-275.82	152.31	1006.95	44.68	22.88	PASS		
5725.00†	5616.87	-853.57	624.83	5529.96	5490.23	-368.35	-283.21	153.17	1037.32	45.65	23.07	PASS		
5825.00†	5714.72	-870.22	637.02	5644.56	5603.81	-355.28	-290.98	154.21	1067.07	46.84	23.12	PASS		
5925.00†	5812.57	-886.86	649.20	5759.25	5717.42	-340.18	-294.97	155.38	1095.16	48.02	23.13	PASS		
6025.00†	5910.42	-903.50	661.38	5867.27	5824.47	-325.80	-296.38	156.49	1121.80	49.13	23.15	PASS		
6125.00†	6008.27	-920.15	673.57	5966.97	5923.28	-312.52	-297.05	157.48	1148.27	50.16	23.21	PASS		
6225.00†	6106.12	-936.79	685.75	6058.60	6014.00	-299.66	-296.91	158.40	1174.75	51.12	23.29	PASS		
6325.00†	6203.97	-953.43	697.93	6142.67	6097.11	-287.03	-296.91	159.24	1202.18	52.02	23.42	PASS		
6425.00†	6301.82	-970.08	710.12	6227.75	6181.21	-274.17	-297.76	160.03	1230.71	52.93	23.55	PASS		
6525.00†	6399.66	-986.72	722.30	6310.08	6264.24	-261.75	-298.86	160.78	1259.24	53.84	23.68	PASS		
6605.93	6478.85	-1000.19	732.16	6394.68	6345.25	-249.84	-300.14	161.50	1287.77	54.75	23.80	PASS		
6625.00†	6497.54	-1003.38	734.20	6479.28	6426.26	-239.33	-301.42	162.25	1316.30	55.66	23.92	PASS		
6725.00†	6595.97	-1020.39	735.57	6563.87	6507.27	-229.32	-302.70	163.00	1344.83	56.57	24.04	PASS		
6825.00†	6693.34	-1037.59	721.30	6648.47	6588.28	-219.31	-303.98	163.75	1373.36	57.48	24.16	PASS		
6925.00†	6787.24	-1054.57	691.74	6733.07	6669.29	-209.30	-305.26	164.50	1401.89	58.39	24.28	PASS		
7025.00†	6875.37	-1070.91	647.62	6803.78	6750.30	-199.29	-306.54	165.25	1430.42	59.30	24.40	PASS		
7125.00†	6955.55	-1086.20	590.03	6978.02	6924.04	-189.28	-307.82	166.00	1458.95	60.21	24.52	PASS		
7225.00†	7025.81	-1100.06	520.38	7047.19	6993.21	-179.27	-309.10	166.75	1487.48	61.12	24.64	PASS		
7325.00†	7084.42	-1112.16	440.40	7123.10	7068.12	-169.26	-310.38	167.50	1516.01	62.03	24.76	PASS		
7425.00†	7129.94	-1122.20	352.04	7204.91	7149.82	-159.25	-311.66	168.25	1544.54	62.94	24.88	PASS		
7525.00†	7161.25	-1129.93	257.49	7286.70	7227.53	-149.24	-312.94	169.00	1573.07	63.85	25.00	PASS		
7625.00†	7177.57	-1135.16	159.08	7368.83	7309.66	-139.23	-314.22	169.75	1601.60	64.76	25.12	PASS		
7682.94	7180.00	-1136.99	101.24	7450.23	7391.06	-129.22	-315.50	170.50	1630.13	65.67	25.24	PASS		
7725.00†	7179.88	-1138.00	59.19	7531.02	7471.85	-119.21	-316.78	171.25	1658.66	66.58	25.36	PASS		
7825.00†	7179.59	-1140.39	-40.78	7611.81	7552.64	-109.20	-318.06	172.00	1687.19	67.49	25.48	PASS		
7925.00†	7179.29	-1142.78	-140.75	7692.62	7633.45	-99.19	-319.34	172.75	1715.72	68.40	25.60	PASS		
8025.00†	7179.00	-1145.17	-240.72	7773.43	7714.26	-89.18	-320.62	173.50	1744.25	69.31	25.72	PASS		

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 190 of 202



REFERENCE WELLPATH IDENTIFICATION			
Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

POSITIONAL UNCERTAINTY - Offset Wellbore: LEFFLER 1C-23-L AWB Offset Wellpath: LEFFLER 1C-23-L AWP			
Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical 1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical 3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: LEFFLER 1C-23-L AWB Offset Wellpath: LEFFLER 1C-23-L AWP									
String/Diameter	Start MD (ft)	End MD (ft)	Interval (ft)	Start TVD (ft)	End TVD (ft)	Start N/S (ft)	Start E/W (ft)	End N/S (ft)	End E/W (ft)
13.5in Open Hole	25.00	1806.00	1781.00	28.00	1801.72	-575.22	-14.42	-540.12	-32.02

WELLPATH COMPOSITION - Offset Wellbore: LEFFLER 1C-23-L AWB Offset Wellpath: LEFFLER 1C-23-L AWP					Log Name/Comment		Wellbore
Start MD (ft)	End MD (ft)	Positional Uncertainty Model					
25.00	1744.00	Custom BHI NaviTrak (Standard Rotating+Axial Corr) (Rockies 0.03Gt model)			BHI NAVITRAK W/EM 13.5"(STD ROTATING, AXIAL, ROCKIES GT)<112-1744>		LEFFLER 1C-23-L AWB
1744.00	17851.00	Custom BHI AutoTrak Curve (IFR1, Short) (Rockies 0.03Gt model)			Custom BHI AutoTrak Curve (IFR1, Short) (Rockies 0.03Gt model) <1837'-17851'>		LEFFLER 1C-23-L AWB
17851.00	17875.00	Blind Drilling (std)			Projection to bit		LEFFLER 1C-23-L AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: LEFFLER 1C-23-L AWB Offset Wellpath: LEFFLER 1C-23-L AWP	
MD Reference: PRECISION 562 (25') (RKB)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	25.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 191 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: LEFFLER 1N-23B-L AWB Offset Wellpath: LEFFLER 1N-23B-L AWP

Facility: SEC.21-T06N-R66W		Slot: SLOT#04 LEFFLER 1N-23B-L (1861'FNL & 275'FEL SEC.21)		Well: LEFFLER 1N-23B-L		Threshold Value=1.00 † = interpolated/extrapolated station							
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	22.00	25.00	-923.87	-23.65	-178.53	924.17	1.26	3077.35	PASS	
125.00†	125.00	0.00	0.00	121.89	124.89	-923.87	-23.40	-178.55	924.17	2.04	1008.86	PASS	
225.00†	225.00	0.00	0.00	224.30	227.30	-923.96	-22.91	-178.58	924.25	2.62	616.60	PASS	
300.00	300.00	0.00	0.00	317.71	320.69	-922.75	-23.85	-178.52	923.29	3.41	403.37	PASS	
325.00†	325.00	-0.09	0.06	348.14	351.10	-921.96	-24.64	37.75	922.57	3.71	356.82	PASS	
425.00†	424.96	-2.20	1.61	451.50	454.33	-918.45	-28.57	38.17	917.22	4.66	259.51	PASS	
525.00†	524.77	-7.13	5.22	555.32	558.00	-914.83	-32.76	38.79	909.10	5.70	198.52	PASS	
625.00†	624.30	-14.86	10.88	667.29	669.79	-909.89	-36.61	39.63	897.44	6.63	162.87	PASS	
725.00†	723.44	-25.39	18.59	811.77	813.76	-899.03	-41.63	41.04	880.35	7.86	130.48	PASS	
825.00†	822.07	-38.71	28.34	927.26	928.33	-885.24	-46.14	42.61	856.42	9.09	107.32	PASS	
895.18	890.91	-49.71	36.39	1001.66	1002.00	-875.34	-49.42	43.87	837.48	9.60	98.72	PASS	
925.00†	920.09	-54.67	40.02	1033.49	1033.46	-870.86	-51.08	44.35	829.05	9.76	95.99	PASS	
1025.00†	1017.94	-71.32	52.20	1134.87	1133.54	-855.62	-56.67	45.99	800.22	10.35	86.59	PASS	
1125.00†	1115.79	-87.96	64.39	1229.82	1227.19	-841.07	-62.31	47.67	771.78	10.94	78.52	PASS	
1225.00†	1213.64	-104.60	76.57	1326.26	1322.26	-825.74	-67.72	49.48	743.41	11.53	71.31	PASS	
1325.00†	1311.48	-121.25	88.76	1419.46	1414.12	-810.90	-72.94	51.37	715.76	12.20	64.53	PASS	
1425.00†	1409.33	-137.89	100.94	1513.30	1506.65	-795.98	-77.54	53.35	688.78	12.87	58.56	PASS	
1525.00†	1507.18	-154.53	113.12	1609.90	1601.92	-780.58	-81.85	55.52	662.51	13.58	53.10	PASS	
1625.00†	1605.03	-171.18	125.31	1703.53	1694.12	-764.99	-86.57	57.84	636.74	14.33	48.13	PASS	
1725.00†	1702.88	-187.82	137.49	1796.44	1785.61	-749.52	-91.34	60.33	612.14	14.79	44.20	PASS	
1825.00†	1800.73	-204.47	149.67	1862.42	1850.67	-739.65	-95.99	62.28	590.99	15.01	41.28	PASS	
1925.00†	1898.58	-221.11	161.86	1939.44	1926.76	-730.53	-103.62	64.75	575.14	15.49	38.87	PASS	
2025.00†	1996.43	-237.75	174.04	2037.61	2023.86	-720.09	-113.68	68.00	562.30	16.01	36.70	PASS	
2125.00†	2094.28	-254.40	186.22	2150.30	2135.35	-706.36	-122.50	71.77	548.88	16.52	34.66	PASS	
2225.00†	2192.13	-271.04	198.41	2255.24	2239.14	-691.88	-128.02	75.34	534.67	17.12	32.54	PASS	
2325.00†	2289.98	-287.68	210.59	2361.90	2344.70	-676.80	-130.35	78.92	520.23	17.78	30.43	PASS	
2425.00†	2387.83	-304.33	222.77	2466.99	2448.73	-662.02	-128.60	82.31	505.09	18.40	28.52	PASS	
2525.00†	2485.68	-320.97	234.96	2563.32	2544.01	-648.18	-125.77	85.54	490.50	19.09	26.65	PASS	
2625.00†	2583.53	-337.62	247.14	2662.05	2641.71	-634.46	-122.13	88.92	477.35	19.80	24.97	PASS	
2725.00†	2681.38	-354.26	259.33	2753.11	2731.70	-620.93	-118.90	92.28	465.51	20.55	23.42	PASS	
2825.00†	2779.23	-370.90	271.51	2828.40	2806.05	-609.08	-118.82	95.40	458.04	21.37	22.13	PASS	
2925.00†	2877.08	-387.55	283.69	2916.02	2892.67	-596.40	-122.41	99.20	456.93	22.34	21.09	PASS	
2979.14†	2930.05	-396.56	290.29	2973.58	2949.51	-587.49	-124.29	101.73	456.85	22.90	20.55	PASS	
3025.00†	2974.93	-404.19	295.88	3019.91	2995.22	-580.05	-125.39	103.78	456.95	23.29	20.21	PASS	
3125.00†	3072.78	-420.83	308.06	3113.48	3087.61	-565.33	-126.91	107.83	458.59	24.06	19.61	PASS	
3225.00†	3170.63	-437.48	320.24	3211.23	3184.35	-551.37	-128.03	111.85	462.72	24.83	19.16	PASS	
3325.00†	3268.48	-454.12	332.43	3314.38	3286.32	-535.79	-127.88	116.06	467.84	25.60	18.76	PASS	
3425.00†	3366.33	-470.77	344.61	3414.73	3385.39	-519.93	-126.14	120.12	473.69	26.38	18.42	PASS	
3525.00†	3464.18	-487.41	356.79	3508.54	3478.01	-505.26	-123.86	123.79	481.18	27.12	18.19	PASS	
3625.00†	3562.03	-504.05	368.98	3593.12	3561.50	-491.76	-122.61	127.03	491.74	27.82	18.11	PASS	
3725.00†	3659.88	-520.70	381.16	3663.86	3631.30	-480.41	-124.03	129.63	507.60	28.47	18.26	PASS	
3825.00†	3757.73	-537.34	393.34	3731.34	3697.89	-470.56	-128.70	131.86	529.69	29.14	18.61	PASS	
3925.00†	3855.57	-553.98	405.53	3807.58	3773.08	-462.02	-137.86	133.90	557.26	29.85	19.10	PASS	
4025.00†	3953.42	-570.63	417.71	3897.54	3861.83	-454.64	-150.60	135.80	587.22	30.63	19.60	PASS	
4125.00†	4051.27	-587.27	429.90	3993.51	3956.53	-446.88	-164.09	137.64	617.66	31.45	20.07	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 192 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: LEFFLER 1N-23B-L AWB Offset Wellpath: LEFFLER 1N-23B-L AWP

Facility: SEC.21-T06N-R66W Slot: SLOT#04 LEFFLER 1N-23B-L (1861'FNL & 275'FEL SEC.21) Well: LEFFLER 1N-23B-L Threshold Value=1.00 † = interpolated/extrapolated station												
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status
4225.00†	4149.12	-603.92	442.08	4090.85	4052.56	-437.48	-176.88	139.47	648.18	32.29	20.50	PASS
4325.00†	4246.97	-620.56	454.26	4200.23	4160.38	-423.54	-188.78	141.68	678.10	33.26	20.81	PASS
4425.00†	4344.82	-637.20	466.45	4303.59	4262.27	-408.10	-196.86	143.84	706.60	34.21	21.07	PASS
4525.00†	4442.67	-653.85	478.63	4402.95	4360.17	-392.40	-203.12	145.85	734.81	35.09	21.35	PASS
4625.00†	4540.52	-670.49	490.81	4498.76	4454.64	-377.37	-208.57	147.66	763.17	35.95	21.63	PASS
4725.00†	4638.37	-687.13	503.00	4594.51	4549.04	-362.19	-213.75	149.36	792.02	36.83	21.91	PASS
4825.00†	4736.22	-703.78	515.18	4695.96	4649.01	-345.50	-217.98	151.11	820.66	37.77	22.13	PASS
4925.00†	4834.07	-720.42	527.36	4793.30	4744.98	-329.53	-221.30	152.70	849.25	38.68	22.34	PASS
5025.00†	4931.92	-737.07	539.55	4888.08	4838.41	-313.83	-224.08	154.16	878.07	39.59	22.57	PASS
5125.00†	5029.77	-753.71	551.73	4972.02	4921.16	-300.10	-226.88	155.37	907.63	40.40	22.85	PASS
5225.00†	5127.62	-770.35	563.91	5057.31	5005.24	-286.53	-231.41	156.44	938.94	41.25	23.14	PASS
5325.00†	5225.47	-787.00	576.10	5157.51	5104.16	-271.69	-237.29	157.55	970.50	42.26	23.34	PASS

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: LEFFLER 1N-23B-L AWB Offset Wellpath: LEFFLER 1N-23B-L AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: LEFFLER 1N-23B-L AWB Offset Wellpath: LEFFLER 1N-23B-L AWP

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
13.5in Open Hole	25.00	1781.00	1756.00	28.00	1770.41	-563.19	-14.42	-510.84	-34.80

WELLPATH COMPOSITION - Offset Wellbore: LEFFLER 1N-23B-L AWB Offset Wellpath: LEFFLER 1N-23B-L AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
25.00	1719.00	Custom BHI NaviTrak (Standard Rotating+Axial Corr) (Rockies 0.03Gt model)	BHI NAVITRAK W/EM 13.5 (STD ROTATING, AXIAL, ROCKIES GT)<112-1719>	LEFFLER 1N-23B-L AWB
1719.00	17663.00	Custom BHI AutoTrak Curve (IFR1, Short) (Rockies 0.03Gt model)	CUSTOM BHI AUTOTRAK CURVE (IFR1, SHORT) (ROCKIES 0.03GT MODEL) <1794'-17663'>	LEFFLER 1N-23B-L AWB
17663.00	17687.00	Blind Drilling (std)	Projection to bit	LEFFLER 1N-23B-L AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: LEFFLER 1N-23B-L AWB Offset Wellpath: LEFFLER 1N-23B-L AWP

MD Reference: PRECISION 562 (25') (RKB)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	25.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 193 of 202

**BAKER
HUGHES**
a GE company



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: EX. MAURICE LEFFLER 1 AWB Offset Wellpath: EX. MAURICE LEFFLER 1 AWP

Facility: SEC.21-T06N-R66W Slot: SLOT#01 EX. MAURICE LEFFLER 1 (660'FNL & 1980'FWL, PA, UNK) Well: EX. MAURICE LEFFLER 1 Threshold Value=1.00 † = interpolated/extrapolated station												
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status
25.00	25.00	0.00	0.00	4.00	25.00	217.33	-3081.85	-85.97	3089.50	50.18	62.76	PASS

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: EX. MAURICE LEFFLER 1 AWB Offset Wellpath: EX. MAURICE LEFFLER 1 AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

WELLPATH COMPOSITION - Offset Wellbore: EX. MAURICE LEFFLER 1 AWB Offset Wellpath: EX. MAURICE LEFFLER 1 AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
0.00	4452.00	Drift Indicator - Inclination Only (Actual Survey)	ASSUMED VERTICAL TO TD FROM COGCC <4452>	EX. MAURICE LEFFLER 1 AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: EX. MAURICE LEFFLER 1 AWB Offset Wellpath: EX. MAURICE LEFFLER 1 AWP

MD Reference: Rig on SLOT#01 EX. MAURICE LEFFLER 1 (660'FNL & 1980'FWL, PA, UNK) (RT)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	0.00ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 194 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: KOHLER J #1-21 AWB Offset Wellpath: KOHLER J #1-21 AWP

Facility: SEC.21-T06N-R66W Slot: SLOT#03 EX:KOHLER J #1-21 (460'FSL & 1978'FEL SEC.21, PR, 7318'MD) Well: KOHLER J #1-21 Threshold Value=1.00 † = interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	-20.00	25.00	-3895.94	-1732.61	-156.02	4263.84	25.57	173.27	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: KOHLER J #1-21 AWB Offset Wellpath: KOHLER J #1-21 AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: KOHLER J #1-21 AWB Offset Wellpath: KOHLER J #1-21 AWP

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
12.25in Open Hole	0.00	402.00	402.00	20.00	422.00	-2374.93	-1056.28	-2375.00	-1056.58
9.625in Casing Surface	0.00	402.00	402.00	20.00	422.00	-2374.93	-1056.28	-2375.00	-1056.58
7.875in Open Hole	402.00	7275.00	6873.00	422.00	7293.95	-2375.00	-1056.58	-2391.41	-1072.70
4.5in Casing Production	0.00	7275.00	7275.00	20.00	7293.95	-2374.93	-1056.28	-2391.41	-1072.70

WELLPATH COMPOSITION - Offset Wellbore: KOHLER J #1-21 AWB Offset Wellpath: KOHLER J #1-21 AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
0.00	7100.00	VESSI GyroFlex v4	VES GYRO SURVEYS FROM SYNERGY, GRID TO TRUE CONVERSION <100-7100>	KOHLER J #1-21 AWB
7100.00	7318.00	Drift Indicator - Inclination Only (Actual Survey)	DRIFT INDICATOR TO TD <7318' FROM CO WEBSITE>	KOHLER J #1-21 AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: KOHLER J #1-21 AWB Offset Wellpath: KOHLER J #1-21 AWP

MD Reference: Rig on SLOT#03 EX:KOHLER J #1-21 (460'FSL & 1978'FEL SEC.21, PR, 7318'MD) (RT)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	0.00ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 195 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: LEFFLER 26N-23B-L AWB Offset Wellpath: LEFFLER 26N-23B-L AWP

Facility: SEC.21-T06N-R66W Slot: SLOT#01 LEFFLER 26N-23B-L (1801'FNL & 275'FEL SEC.21) Well: LEFFLER 26N-23B-L Threshold Value=1.00 † = Interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	22.00	25.00	-863.76	-23.65	-178.43	864.08	1.26	2877.05	PASS	
125.00†	125.00	0.00	0.00	131.37	134.37	-863.14	-23.30	-178.45	863.50	2.14	847.88	PASS	
225.00†	225.00	0.00	0.00	242.27	245.26	-861.48	-22.92	-178.48	862.02	2.73	534.85	PASS	
300.00	300.00	0.00	0.00	337.85	340.77	-858.13	-23.45	-178.44	859.42	3.54	355.10	PASS	
325.00†	325.00	-0.09	0.06	370.64	373.51	-856.42	-23.89	37.83	858.04	3.79	321.47	PASS	
425.00†	424.96	-2.20	1.61	513.39	515.72	-844.41	-26.45	38.31	847.55	5.30	202.53	PASS	
525.00†	524.77	-7.13	5.22	636.89	638.26	-829.25	-28.51	39.03	830.61	6.71	148.64	PASS	
625.00†	624.30	-14.86	10.88	762.54	762.33	-809.67	-31.79	40.19	807.83	7.80	120.77	PASS	
725.00†	723.44	-25.39	18.59	887.96	885.44	-786.23	-36.16	41.84	779.82	8.84	100.92	PASS	
825.00†	822.07	-38.71	28.34	1011.97	1005.84	-757.18	-42.29	44.17	744.96	10.00	83.79	PASS	
895.18	890.91	-49.71	36.39	1082.35	1073.70	-739.03	-46.60	45.96	717.96	10.49	76.56	PASS	
925.00†	920.09	-54.67	40.02	1110.56	1100.84	-731.56	-48.44	46.57	706.17	10.71	73.54	PASS	
1025.00†	1017.94	-71.32	52.20	1196.84	1183.89	-708.84	-54.03	48.59	667.28	11.22	65.96	PASS	
1125.00†	1115.79	-87.96	64.39	1285.24	1269.06	-685.82	-59.54	50.86	629.51	11.79	58.91	PASS	
1225.00†	1213.64	-104.60	76.57	1376.97	1357.47	-661.89	-64.62	53.43	592.61	12.44	52.29	PASS	
1325.00†	1311.48	-121.25	88.76	1462.53	1440.04	-639.87	-68.69	56.03	557.04	13.12	46.33	PASS	
1425.00†	1409.33	-137.89	100.94	1554.20	1528.63	-616.58	-72.50	59.09	522.93	13.91	40.82	PASS	
1525.00†	1507.18	-154.53	113.12	1638.76	1610.46	-595.54	-75.69	62.19	490.72	14.74	35.95	PASS	
1625.00†	1605.03	-171.18	125.31	1730.27	1699.13	-573.17	-79.17	65.93	460.72	15.71	31.52	PASS	
1725.00†	1702.88	-187.82	137.49	1814.76	1781.01	-552.68	-82.91	69.82	433.36	16.37	28.06	PASS	
1825.00†	1800.73	-204.47	149.67	1903.71	1867.49	-532.30	-87.26	74.31	409.96	16.73	25.54	PASS	
1925.00†	1898.58	-221.11	161.86	2018.88	1979.22	-504.50	-88.56	80.42	386.68	17.33	23.22	PASS	
2025.00†	1996.43	-237.75	174.04	2115.72	2072.22	-477.62	-86.26	86.21	361.98	18.36	20.47	PASS	
2125.00†	2094.28	-254.40	186.22	2196.93	2149.84	-453.77	-86.48	91.98	342.35	19.02	18.66	PASS	
2225.00†	2192.13	-271.04	198.41	2267.27	2216.29	-431.19	-90.94	97.94	331.59	20.06	17.10	PASS	
2256.80†	2223.24	-276.33	202.28	2286.20	2234.18	-425.32	-92.92	99.61	330.85	17.14	20.10	PASS	
2325.00†	2289.98	-287.68	210.59	2330.24	2275.89	-412.49	-98.85	103.46	333.96	20.94	16.47	PASS	
2425.00†	2387.83	-304.33	222.77	2403.95	2346.52	-395.30	-110.89	109.20	348.30	21.87	16.42	PASS	
2525.00†	2485.68	-320.97	234.96	2515.29	2454.46	-373.79	-127.46	116.50	367.58	22.71	16.68	PASS	
2625.00†	2583.53	-337.62	247.14	2623.27	2559.08	-348.76	-136.72	123.33	384.80	23.55	16.82	PASS	
2725.00†	2681.38	-354.26	259.33	2708.97	2641.65	-326.71	-142.96	128.59	405.18	24.03	17.35	PASS	
2825.00†	2779.23	-370.90	271.51	2794.61	2723.97	-304.12	-149.87	133.47	430.20	24.38	18.14	PASS	
2925.00†	2877.08	-387.55	283.69	2883.42	2809.34	-280.94	-157.65	137.97	459.06	24.78	19.04	PASS	
3025.00†	2974.93	-404.19	295.88	2993.30	2915.03	-251.72	-164.49	143.05	488.64	25.36	19.79	PASS	
3125.00†	3072.78	-420.83	308.06	3108.17	3025.55	-220.45	-165.19	148.02	516.09	26.04	20.34	PASS	
3225.00†	3170.63	-437.48	320.24	3226.53	3139.57	-189.15	-160.01	152.73	541.55	26.72	20.80	PASS	
3325.00†	3268.48	-454.12	332.43	3327.35	3236.75	-163.64	-151.83	156.44	565.59	27.33	21.22	PASS	
3425.00†	3366.33	-470.77	344.61	3409.79	3316.07	-142.25	-144.88	159.31	591.65	27.85	21.77	PASS	
3525.00†	3464.18	-487.41	356.79	3487.91	3391.19	-121.46	-139.61	161.80	621.02	28.38	22.41	PASS	
3625.00†	3562.03	-504.05	368.98	3576.35	3476.25	-97.72	-134.87	164.35	652.93	29.01	23.04	PASS	
3725.00†	3659.88	-520.70	381.16	3668.45	3564.70	-72.62	-129.50	166.82	686.01	29.68	23.65	PASS	
3825.00†	3757.73	-537.34	393.34	3726.36	3620.11	-56.02	-126.85	168.27	721.94	30.19	24.46	PASS	
3925.00†	3855.57	-553.98	405.53	3778.54	3669.88	-40.39	-127.20	169.39	762.93	30.67	25.44	PASS	
4025.00†	3953.42	-570.63	417.71	3824.93	3713.97	-26.48	-130.91	170.13	808.96	31.15	26.55	PASS	
4125.00†	4051.27	-587.27	429.90	3900.07	3785.01	-5.46	-143.27	170.83	859.02	32.03	27.41	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 196 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: **LEFFLER 26N-23B-L AWB** Offset Wellpath: **LEFFLER 26N-23B-L AWP**

Facility: SEC.21-T06N-R66W		Slot: SLOT#01 LEFFLER 26N-23B-L (1801'FNL & 275'FEL SEC.21)		Well: LEFFLER 26N-23B-L		Threshold Value=1.00		† = Interpolated/extrapolated station				
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status
4225.00†	4149.12	-603.92	442.08	4005.46	3885.62	16.83	-165.30	171.08	907.56	33.19	27.92	PASS
4325.00†	4246.97	-620.56	454.26	4093.83	3970.21	33.65	-184.58	171.15	955.35	34.06	28.63	PASS

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: **LEFFLER 26N-23B-L AWB** Offset Wellpath: **LEFFLER 26N-23B-L AWP**

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: **LEFFLER 26N-23B-L AWB** Offset Wellpath: **LEFFLER 26N-23B-L AWP**

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
13.5in Open Hole	25.00	1797.00	1772.00	28.00	1763.79	-526.55	-14.42	-433.02	-32.21

WELLPATH COMPOSITION - Offset Wellbore: **LEFFLER 26N-23B-L AWB** Offset Wellpath: **LEFFLER 26N-23B-L AWP**

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
25.00	1735.00	Custom BHI NaviTrak (Standard Rotating+Axial Cor) (Rockies 0.03Gt model)	BHI NAVITRAK W/EM 13.5" (STD ROTATING, AXIAL, ROCKIES GT)<91-1714>	LEFFLER 26N-23B-L AWB
1735.00	10475.00	Custom BHI AutoTrak Curve (IFR1, Short) (Rockies 0.03Gt model)	8 1/2" Monobore <1839'-10475...	LEFFLER 26N-23B-L AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: **LEFFLER 26N-23B-L AWB** Offset Wellpath: **LEFFLER 26N-23B-L AWP**

MD Reference: PRECISION 562 (25') (RKB)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	25.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 197 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: LEFFLER 1N-23C-L AWB Offset Wellpath: LEFFLER 1N-23C-L AWP

Facility: SEC.21-T06N-R66W		Slot: SLOT#03 LEFFLER 1N-23C-L (1841'FNL & 275'FEL SEC.21)				Well: LEFFLER 1N-23C-L		Threshold Value=1.00 † = interpolated/extrapolated station						
Ref TD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status		
25.00	25.00	0.00	0.00	22.00	25.00	-903.83	-23.65	-178.50	904.14	1.26	3010.59	PASS		
125.00†	125.00	0.00	0.00	130.62	133.62	-903.19	-23.71	-178.50	903.54	2.15	881.00	PASS		
225.00†	225.00	0.00	0.00	227.81	230.80	-902.47	-23.62	-178.50	902.79	2.78	545.16	PASS		
300.00	300.00	0.00	0.00	305.63	308.62	-901.91	-23.80	-178.49	902.27	3.23	427.20	PASS		
325.00†	325.00	-0.09	0.06	335.44	338.42	-901.54	-24.12	37.75	901.88	3.35	405.56	PASS		
425.00†	424.96	-2.20	1.61	444.90	447.83	-899.05	-26.57	38.07	897.59	4.24	288.18	PASS		
525.00†	524.77	-7.13	5.22	554.10	556.95	-895.69	-29.03	38.60	889.81	5.33	211.56	PASS		
625.00†	624.30	-14.86	10.88	659.31	662.05	-891.47	-31.32	39.32	878.44	6.28	170.34	PASS		
725.00†	723.44	-25.39	18.59	784.35	786.83	-883.97	-34.41	40.46	862.55	7.32	139.10	PASS		
825.00†	822.07	-38.71	28.34	904.84	906.79	-873.24	-37.41	41.90	841.39	8.35	116.31	PASS		
895.18	890.91	-49.71	36.39	1000.83	1002.05	-861.75	-40.29	43.34	823.19	9.07	103.43	PASS		
925.00†	920.09	-54.67	40.02	1039.86	1040.63	-856.05	-41.79	43.90	814.51	9.39	98.42	PASS		
1025.00†	1017.94	-71.32	52.20	1161.42	1160.20	-835.10	-47.93	45.88	783.35	10.26	85.67	PASS		
1125.00†	1115.79	-87.96	64.39	1260.52	1257.21	-815.59	-53.23	47.71	750.52	10.67	78.51	PASS		
1225.00†	1213.64	-104.60	76.57	1349.59	1344.40	-797.99	-57.98	49.49	718.33	11.53	68.94	PASS		
1325.00†	1311.48	-121.25	88.76	1440.67	1433.63	-780.35	-62.75	51.45	687.24	12.10	62.51	PASS		
1425.00†	1409.33	-137.89	100.94	1528.89	1520.12	-763.55	-67.05	53.48	657.22	12.73	56.52	PASS		
1525.00†	1507.18	-154.53	113.12	1623.31	1612.81	-746.01	-71.16	55.78	628.46	13.43	50.99	PASS		
1625.00†	1605.03	-171.18	125.31	1716.35	1704.06	-728.33	-75.23	58.27	600.37	14.16	45.96	PASS		
1725.00†	1702.88	-187.82	137.49	1811.99	1797.79	-709.81	-79.60	61.08	573.24	14.58	42.01	PASS		
1825.00†	1800.73	-204.47	149.67	1904.65	1888.37	-690.99	-84.80	64.19	547.15	14.65	39.21	PASS		
1925.00†	1898.58	-221.11	161.86	1994.26	1975.88	-672.63	-90.66	67.53	523.08	14.92	36.76	PASS		
2025.00†	1996.43	-237.75	174.04	2088.00	2067.36	-653.20	-97.06	71.35	501.12	15.30	34.30	PASS		
2125.00†	2094.28	-254.40	186.22	2185.82	2162.84	-632.63	-102.51	75.55	480.76	15.78	31.84	PASS		
2225.00†	2192.13	-271.04	198.41	2286.20	2260.84	-611.20	-105.89	80.02	461.55	16.37	29.42	PASS		
2325.00†	2289.98	-287.68	210.59	2383.81	2356.08	-589.86	-107.01	84.56	443.34	17.04	27.10	PASS		
2425.00†	2387.83	-304.33	222.77	2481.14	2451.10	-568.77	-106.65	89.27	427.15	17.76	25.01	PASS		
2525.00†	2485.68	-320.97	234.96	2572.43	2540.14	-548.67	-105.44	93.94	413.13	18.52	23.15	PASS		
2625.00†	2583.53	-337.62	247.14	2658.41	2624.01	-529.76	-105.32	98.63	403.47	19.31	21.65	PASS		
2725.00†	2681.38	-354.26	259.33	2743.20	2706.72	-511.12	-106.78	103.47	399.10	20.11	20.54	PASS		
2753.20†	2708.98	-358.95	262.76	2768.05	2730.95	-505.65	-107.52	104.92	398.88	20.34	20.28	PASS		
2825.00†	2779.23	-370.90	271.51	2828.38	2789.78	-492.47	-109.78	108.45	400.34	20.90	19.79	PASS		
2925.00†	2877.08	-387.55	283.69	2918.05	2877.28	-473.31	-113.88	113.58	406.72	21.68	19.36	PASS		
3025.00†	2974.93	-404.19	295.88	3009.02	2966.04	-453.79	-117.98	118.62	416.92	22.44	19.16	PASS		
3125.00†	3072.78	-420.83	308.06	3098.03	3052.89	-434.79	-122.36	123.31	431.11	23.15	19.17	PASS		
3225.00†	3170.63	-437.48	320.24	3192.10	3144.73	-415.04	-127.22	127.92	448.78	23.90	19.32	PASS		
3325.00†	3268.48	-454.12	332.43	3284.81	3235.46	-396.42	-131.21	132.05	468.38	24.64	19.54	PASS		
3425.00†	3366.33	-470.77	344.61	3377.14	3325.70	-377.34	-135.34	135.91	490.64	25.38	19.85	PASS		
3525.00†	3464.18	-487.41	356.79	3467.43	3414.07	-359.20	-139.28	139.32	514.82	26.12	20.23	PASS		
3625.00†	3562.03	-504.05	368.98	3559.11	3503.66	-340.19	-143.54	142.55	541.24	26.89	20.65	PASS		
3725.00†	3659.88	-520.70	381.16	3642.91	3585.59	-323.15	-147.79	145.21	569.50	27.61	21.14	PASS		
3825.00†	3757.73	-537.34	393.34	3722.41	3663.04	-306.08	-153.17	147.56	600.94	28.32	21.74	PASS		
3925.00†	3855.57	-553.98	405.53	3804.57	3743.03	-288.75	-160.44	149.70	635.08	29.08	22.36	PASS		
4025.00†	3953.42	-570.63	417.71	3888.80	3825.01	-271.49	-169.09	151.60	671.05	29.85	23.00	PASS		
4125.00†	4051.27	-587.27	429.90	3974.57	3908.48	-254.55	-179.20	153.25	708.58	30.65	23.64	PASS		

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 198 of 202

**BAKER
HUGHES**
a GE company



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: LEFFLER 1N-23C-L AWB Offset Wellpath: LEFFLER 1N-23C-L AWP

Facility: SEC.21-T06N-R66W Slot: SLOT#03 LEFFLER 1N-23C-L (1841'FNL & 275'FEL SEC.21) Well: LEFFLER 1N-23C-L Threshold Value=1.00 † = interpolated/extrapolated station												
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status
4225.00†	4149.12	-603.92	442.08	4069.66	4001.06	-236.14	-190.70	154.88	746.72	31.57	24.17	PASS
4325.00†	4246.97	-620.56	454.26	4176.07	4104.79	-215.03	-201.51	156.62	784.03	32.62	24.55	PASS
4425.00†	4344.82	-637.20	466.45	4270.37	4196.79	-195.68	-208.89	158.14	820.33	33.55	24.95	PASS
4525.00†	4442.67	-653.85	478.63	4358.02	4282.20	-177.24	-215.80	159.47	857.41	34.42	25.41	PASS
4625.00†	4540.52	-670.49	490.81	4444.91	4366.83	-158.91	-222.98	160.67	895.20	35.29	25.87	PASS
4725.00†	4638.37	-687.13	503.00	4534.84	4454.41	-140.09	-230.97	161.79	933.70	36.20	26.29	PASS
4825.00†	4736.22	-703.78	515.18	4628.02	4545.17	-120.63	-239.07	162.87	972.34	37.15	26.66	PASS

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: LEFFLER 1N-23C-L AWB Offset Wellpath: LEFFLER 1N-23C-L AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: LEFFLER 1N-23C-L AWB Offset Wellpath: LEFFLER 1N-23C-L AWP

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
13.5in Open Hole	25.00	1792.00	1767.00	28.00	1778.22	-550.97	-14.42	-493.04	-31.18

WELLPATH COMPOSITION - Offset Wellbore: LEFFLER 1N-23C-L AWB Offset Wellpath: LEFFLER 1N-23C-L AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
25.00	1732.00	Custom BHI NaviTrak (Standard Rotating+Axial Corr) (Rockies 0.03Gt model)	BHI NAVITRAK W/EM 13.5" (STD ROTATING, AXIAL, ROCKIES GT)<112-1732>	LEFFLER 1N-23C-L AWB
1732.00	17921.00	Custom BHI AutoTrak Curve (IFR1, Short) (Rockies 0.03Gt model)	CUSTOM BHI AUTOTRAK CURVE (IFR, SHORT) (ROCKIES 0.03GT MODEL)<1796'-17921'>	LEFFLER 1N-23C-L AWB
17921.00	17945.00	Blind Drilling (std)	Projection to bit	LEFFLER 1N-23C-L AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: LEFFLER 1N-23C-L AWB Offset Wellpath: LEFFLER 1N-23C-L AWP

MD Reference: PRECISION 562 (25') (RKB)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	25.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 199 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: LEFFLER 26N-23B-L PWB Offset Wellpath: LEFFLER 26N-23B-L PWP REV-B.0

Facility: SEC.21-T06N-R66W		Slot: SLOT#01 LEFFLER 26N-23B-L (1801'FNL & 275'FEL SEC.21)				Well: LEFFLER 26N-23B-L		Threshold Value=1.00		† = interpolated/extrapolated station			
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
25.00	25.00	0.00	0.00	22.00	25.00	-863.76	-23.65	-178.43	864.08	1.26	2877.05	PASS	
125.00†	125.00	0.00	0.00	131.37	134.37	-863.14	-23.30	-178.45	863.50	2.14	847.88	PASS	
225.00†	225.00	0.00	0.00	242.27	245.26	-861.48	-22.92	-178.48	862.02	2.73	534.84	PASS	
300.00	300.00	0.00	0.00	337.85	340.77	-858.13	-23.45	-178.44	859.42	3.54	355.10	PASS	
325.00†	325.00	-0.09	0.06	370.64	373.51	-856.42	-23.89	37.83	858.04	3.79	321.47	PASS	
425.00†	424.96	-2.20	1.61	513.39	515.72	-844.41	-26.45	38.31	847.55	5.30	202.53	PASS	
525.00†	524.77	-7.13	5.22	636.89	638.26	-829.25	-28.51	39.03	830.61	6.71	148.63	PASS	
625.00†	624.30	-14.86	10.88	762.54	762.33	-809.67	-31.79	40.19	807.83	7.80	120.77	PASS	
725.00†	723.44	-25.39	18.59	887.96	885.44	-786.23	-36.16	41.84	779.82	8.84	100.91	PASS	
825.00†	822.07	-38.71	28.34	1011.97	1005.84	-757.18	-42.29	44.17	744.96	10.00	83.78	PASS	
895.18	890.91	-49.71	36.39	1082.35	1073.70	-739.03	-46.60	45.96	717.96	10.49	76.55	PASS	
925.00†	920.09	-54.67	40.02	1110.56	1100.84	-731.56	-48.44	46.57	706.17	10.71	73.53	PASS	
1025.00†	1017.94	-71.32	52.20	1196.84	1183.89	-708.84	-54.03	48.59	667.28	11.22	65.96	PASS	
1125.00†	1115.79	-87.96	64.39	1285.24	1269.06	-685.82	-59.54	50.86	629.51	11.79	58.90	PASS	
1225.00†	1213.64	-104.60	76.57	1376.97	1357.47	-661.89	-64.62	53.43	592.61	12.44	52.29	PASS	
1325.00†	1311.48	-121.25	88.76	1462.53	1440.04	-639.87	-68.69	56.03	557.04	13.12	46.33	PASS	
1425.00†	1409.33	-137.89	100.94	1554.20	1528.63	-616.58	-72.50	59.09	522.93	13.91	40.82	PASS	
1525.00†	1507.18	-154.53	113.12	1638.76	1610.46	-595.54	-75.69	62.19	490.72	14.74	35.95	PASS	
1625.00†	1605.03	-171.18	125.31	1730.27	1699.13	-573.17	-79.17	65.93	460.72	15.71	31.52	PASS	
1725.00†	1702.88	-187.82	137.49	1824.68	1790.27	-548.90	-83.35	70.40	432.18	16.22	28.17	PASS	
1825.00†	1800.73	-204.47	149.67	1914.09	1876.46	-525.50	-87.50	75.19	406.26	16.55	25.60	PASS	
1925.00†	1898.58	-221.11	161.86	2003.49	1962.65	-502.10	-91.66	80.48	383.83	17.07	23.41	PASS	
2025.00†	1996.43	-237.75	174.04	2092.90	2048.84	-478.70	-95.81	86.27	365.54	17.70	21.47	PASS	
2125.00†	2094.28	-254.40	186.22	2182.31	2135.03	-455.30	-99.97	92.49	352.03	18.40	19.86	PASS	
2225.00†	2192.13	-271.04	198.41	2271.71	2221.22	-431.90	-104.12	99.02	343.87	19.13	18.62	PASS	
2316.56†	2281.72	-286.28	209.56	2355.78	2302.26	-409.89	-108.03	105.32	341.42	19.80	17.85	PASS	
2325.00†	2289.98	-287.68	210.59	2361.12	2307.41	-408.50	-108.28	105.72	341.44	19.85	17.80	PASS	
2425.00†	2387.83	-304.33	222.77	2450.53	2393.60	-385.10	-112.43	112.40	344.85	20.52	17.37	PASS	
2489.93†	2451.36	-315.14	230.69	2508.58	2449.56	-369.90	-115.13	116.65	350.13	20.92	17.29	PASS	
2525.00†	2485.68	-320.97	234.96	2539.93	2479.79	-361.70	-116.59	118.89	353.95	21.11	17.31	PASS	
2625.00†	2583.53	-337.62	247.14	2629.34	2565.98	-338.30	-120.75	125.04	368.31	21.65	17.56	PASS	
2725.00†	2681.38	-354.26	259.33	2718.75	2652.17	-314.90	-124.90	130.75	387.34	22.14	18.04	PASS	
2825.00†	2779.23	-370.90	271.51	2808.15	2738.36	-291.50	-129.06	135.97	410.40	22.61	18.71	PASS	
2925.00†	2877.08	-387.55	283.69	2897.56	2824.55	-268.10	-133.21	140.67	436.85	23.08	19.49	PASS	
3025.00†	2974.93	-404.19	295.88	2986.97	2910.74	-244.70	-137.37	144.88	466.11	23.58	20.35	PASS	
3125.00†	3072.78	-420.83	308.06	3076.37	2996.93	-221.30	-141.52	148.63	497.69	24.11	21.24	PASS	
3225.00†	3170.63	-437.48	320.24	3165.78	3083.12	-197.90	-145.68	151.97	531.17	24.68	22.13	PASS	
3325.00†	3268.48	-454.12	332.43	3255.19	3169.31	-174.49	-149.83	154.94	566.21	25.28	23.01	PASS	
3425.00†	3366.33	-470.77	344.61	3344.59	3255.50	-151.09	-153.99	157.59	602.55	25.93	23.87	PASS	
3525.00†	3464.18	-487.41	356.79	3434.00	3341.69	-127.69	-158.14	159.95	639.97	26.61	24.68	PASS	
3625.00†	3562.03	-504.05	368.98	3523.41	3427.88	-104.29	-162.30	162.07	678.27	27.32	25.46	PASS	
3725.00†	3659.88	-520.70	381.16	3612.82	3514.07	-80.89	-166.45	163.97	717.33	28.07	26.19	PASS	
3825.00†	3757.73	-537.34	393.34	3702.22	3600.26	-57.49	-170.61	165.68	757.03	28.84	26.88	PASS	
3925.00†	3855.57	-553.98	405.53	3791.63	3686.45	-34.09	-174.76	167.23	797.26	29.64	27.53	PASS	
4025.00†	3953.42	-570.63	417.71	3881.04	3772.64	-10.69	-178.92	168.63	837.96	30.46	28.14	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 200 of 202

**BAKER
HUGHES**
a GE company



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: LEFFLER 26N-23B-L PWB Offset Wellpath: LEFFLER 26N-23B-L PWP REV-B.0

Facility: SEC.21-T06N-R66W Slot: SLOT#01 LEFFLER 26N-23B-L (1801'FNL & 275'FEL SEC.21) Well: LEFFLER 26N-23B-L Threshold Value=1.00 † = Interpolated/extrapolated station													
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status	
4125.00†	4051.27	-587.27	429.90	3970.44	3858.83	12.71	-183.07	169.91	879.06	31.30	28.71	PASS	
4225.00†	4149.12	-603.92	442.08	4059.85	3945.02	36.11	-187.23	171.08	920.50	32.15	29.25	PASS	
4325.00†	4246.97	-620.56	454.26	4149.26	4031.21	59.51	-191.38	172.15	962.24	33.03	29.75	PASS	

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: LEFFLER 26N-23B-L PWB Offset Wellpath: LEFFLER 26N-23B-L PWP REV-B.0

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: LEFFLER 26N-23B-L PWB Offset Wellpath: LEFFLER 26N-23B-L PWP REV-B.0

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
13.5in Open Hole	25.00	1735.00	1710.00	28.00	1703.71	-526.55	-14.42	-437.62	-31.40
8.5in Open Hole	1735.00	17714.90	15979.90	1703.71	N/A	-437.62	-31.40	N/A	N/A

SURVEY PROGRAM - Offset Wellbore: LEFFLER 26N-23B-L PWB Offset Wellpath: LEFFLER 26N-23B-L PWP REV-B.0

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
25.00	1735.00	Custom BHI NaviTrak (Standard Rotating+Axial Corr) (Rockies 0.03Gt model)	BHI NAVITRAK W/EM 13.5" (STD ROTATING, AXIAL, ROCKIES GT)<91-1714>	LEFFLER 26N-23B-L AWB
1735.00	17714.90	Custom BHI AutoTrak Curve (IFR1, Short) (Rockies 0.03Gt model)		LEFFLER 26N-23B-L PWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: LEFFLER 26N-23B-L PWB Offset Wellpath: LEFFLER 26N-23B-L PWP REV-B.0

MD Reference: PRECISION 562 (25') (RKB)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	25.00ft

Clearance Report

DONN 5C-20-L PWP (REV-B.0)

Closest Approach

Page 201 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: LEFFLER 26C-23-L AWP Offset Wellpath: LEFFLER 26C-23-L AWP

Facility: SEC.21-T06N-R66W			Slot: SLOT#02 LEFFLER 26C-23-L (1821'FNL & 275'FEL SEC.21)			Well: LEFFLER 26C-23-L		Threshold Value=1.00 † = interpolated/extrapolated station						
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status		
25.00	25.00	0.00	0.00	22.00	25.00	-883.79	-23.65	-178.47	884.11	1.26	2943.82	PASS		
125.00†	125.00	0.00	0.00	128.24	131.24	-883.41	-23.35	-178.49	883.74	2.10	905.01	PASS		
225.00†	225.00	0.00	0.00	228.27	231.26	-882.56	-23.46	-178.48	882.89	2.69	562.14	PASS		
300.00	300.00	0.00	0.00	296.95	299.94	-882.34	-23.58	-178.47	882.65	3.11	443.44	PASS		
325.00†	325.00	-0.09	0.06	322.65	325.65	-882.33	-23.60	37.74	882.56	3.27	411.66	PASS		
425.00†	424.96	-2.20	1.61	424.35	427.35	-882.11	-23.87	37.89	880.28	4.07	298.72	PASS		
525.00†	524.77	-7.13	5.22	537.16	540.15	-881.30	-24.30	38.27	874.81	5.22	213.26	PASS		
625.00†	624.30	-14.86	10.88	661.80	664.71	-877.33	-25.64	39.00	864.19	6.45	162.09	PASS		
725.00†	723.44	-25.39	18.59	800.73	803.23	-867.03	-27.53	40.17	846.67	7.82	126.30	PASS		
825.00†	822.07	-38.71	28.34	936.69	938.18	-850.90	-30.29	41.81	822.54	8.99	104.43	PASS		
895.18	890.91	-49.71	36.39	1015.71	1016.23	-838.89	-33.12	43.15	802.09	9.65	94.01	PASS		
925.00†	920.09	-54.67	40.02	1048.67	1048.72	-833.51	-34.45	43.64	792.89	9.83	90.92	PASS		
1025.00†	1017.94	-71.32	52.20	1168.58	1166.50	-811.69	-39.97	45.63	760.74	10.49	81.11	PASS		
1125.00†	1115.79	-87.96	64.39	1271.01	1266.46	-789.94	-45.02	47.56	726.26	11.25	71.60	PASS		
1225.00†	1213.64	-104.60	76.57	1373.23	1365.94	-766.99	-50.10	49.71	691.37	11.80	64.68	PASS		
1325.00†	1311.48	-121.25	88.76	1464.51	1454.65	-745.82	-53.90	51.78	656.46	12.41	58.08	PASS		
1425.00†	1409.33	-137.89	100.94	1549.06	1536.95	-726.69	-57.03	53.84	622.83	13.01	52.30	PASS		
1525.00†	1507.18	-154.53	113.12	1640.86	1626.35	-706.23	-60.87	56.34	590.63	13.70	46.87	PASS		
1625.00†	1605.03	-171.18	125.31	1726.73	1710.01	-687.29	-64.93	58.96	559.99	14.43	42.01	PASS		
1725.00†	1702.88	-187.82	137.49	1817.99	1799.00	-667.55	-69.33	62.00	531.18	14.92	37.99	PASS		
1825.00†	1800.73	-204.47	149.67	1915.22	1893.62	-645.71	-74.16	65.63	503.42	15.04	35.07	PASS		
1925.00†	1898.58	-221.11	161.86	2003.69	1979.52	-625.20	-79.44	69.40	477.56	15.35	32.58	PASS		
2025.00†	1996.43	-237.75	174.04	2095.22	2068.41	-604.06	-84.98	73.67	454.37	15.75	30.16	PASS		
2125.00†	2094.28	-254.40	186.22	2188.31	2158.77	-582.30	-90.05	78.35	433.60	16.26	27.84	PASS		
2225.00†	2192.13	-271.04	198.41	2279.56	2247.31	-560.74	-94.82	83.30	415.88	16.85	25.71	PASS		
2325.00†	2289.98	-287.68	210.59	2371.52	2336.55	-538.99	-99.35	88.61	401.73	17.52	23.85	PASS		
2425.00†	2387.83	-304.33	222.77	2466.80	2429.03	-516.41	-103.19	94.34	391.07	18.00	22.58	PASS		
2525.00†	2485.68	-320.97	234.96	2560.41	2519.75	-493.48	-105.94	100.20	383.58	19.02	20.91	PASS		
2625.00†	2583.53	-337.62	247.14	2649.93	2606.54	-471.67	-108.37	105.92	380.64	19.78	19.92	PASS		
2636.72†	2595.00	-339.57	248.57	2659.48	2615.79	-469.35	-108.65	106.53	380.63	19.86	19.84	PASS		
2725.00†	2681.38	-354.26	259.33	2737.54	2691.47	-450.38	-111.19	111.53	382.92	20.50	19.31	PASS		
2825.00†	2779.23	-370.90	271.51	2823.73	2775.07	-429.73	-114.73	116.92	390.71	21.21	19.03	PASS		
2925.00†	2877.08	-387.55	283.69	2911.54	2860.29	-409.01	-119.24	122.17	403.85	21.89	19.03	PASS		
3025.00†	2974.93	-404.19	295.88	3000.34	2946.43	-388.00	-124.02	127.16	421.17	22.55	19.25	PASS		
3125.00†	3072.78	-420.83	308.06	3088.14	3031.60	-367.32	-129.31	131.73	442.55	23.20	19.64	PASS		
3225.00†	3170.63	-437.48	320.24	3176.62	3117.41	-346.52	-134.95	135.93	467.27	23.86	20.15	PASS		
3325.00†	3268.48	-454.12	332.43	3266.28	3204.39	-325.65	-141.14	139.76	494.85	24.54	20.73	PASS		
3425.00†	3366.33	-470.77	344.61	3360.01	3295.31	-303.73	-147.24	143.40	524.27	25.27	21.31	PASS		
3525.00†	3464.18	-487.41	356.79	3456.79	3389.22	-280.91	-152.46	146.82	554.62	26.05	21.86	PASS		
3625.00†	3562.03	-504.05	368.98	3554.96	3484.49	-257.56	-156.30	150.01	585.39	26.87	22.35	PASS		
3725.00†	3659.88	-520.70	381.16	3651.48	3578.24	-234.71	-158.84	152.89	616.48	27.68	22.83	PASS		
3825.00†	3757.73	-537.34	393.34	3739.14	3663.45	-214.21	-160.93	155.25	648.48	28.45	23.35	PASS		
3925.00†	3855.57	-553.98	405.53	3823.71	3745.41	-193.55	-163.29	157.38	682.35	29.20	23.92	PASS		
4025.00†	3953.42	-570.63	417.71	3907.46	3826.60	-173.28	-166.62	159.26	717.93	29.98	24.51	PASS		
4125.00†	4051.27	-587.27	429.90	3989.71	3906.32	-153.47	-170.98	160.89	755.15	30.75	25.11	PASS		

C-C Clearance Distance Cutoff: 1000.00 ft

Clearance Report
DONN 5C-20-L PWP (REV-B.0)
Closest Approach
Page 202 of 202



REFERENCE WELLPATH IDENTIFICATION

Operator	SRC ENERGY	Slot	SLOT#23 DONN 5C-20-L (938'FNL & 252'FEL, SEC.21)
Area	COLORADO	Well	DONN 5C-20-L
Field	WELD COUNTY (NAD83,TRUE NORTH)	Wellbore	DONN 5C-20-L PWB
Facility	SEC.21-T06N-R66W		

CLEARANCE DATA - Offset Wellbore: LEFFLER 26C-23-L AWB Offset Wellpath: LEFFLER 26C-23-L AWP

Facility: SEC.21-T06N-R66W Slot: SLOT#02 LEFFLER 26C-23-L (1821'FNL & 275'FEL SEC.21) Well: LEFFLER 26C-23-L Threshold Value=1.00 † = interpolated/extrapolated station												
Ref MD [ft]	Ref TVD [ft]	Ref North [ft]	Ref East [ft]	Offset MD [ft]	Offset TVD [ft]	Offset North [ft]	Offset East [ft]	Angle from Highside [°]	C-C Clear Dist [ft]	ACR MASD [ft]	Sep Ratio	ACR Status
4225.00†	4149.12	-603.92	442.08	4074.54	3988.50	-133.23	-176.70	162.37	793.87	31.57	25.70	PASS
4325.00†	4246.97	-620.56	454.26	4170.13	4081.20	-111.00	-183.71	163.82	833.15	32.51	26.18	PASS
4425.00†	4344.82	-637.20	466.45	4259.97	4168.52	-90.83	-189.90	165.04	872.01	33.40	26.65	PASS
4525.00†	4442.67	-653.85	478.63	4342.94	4249.03	-71.78	-196.27	166.07	912.02	34.25	27.17	PASS
4625.00†	4540.52	-670.49	490.81	4433.25	4336.57	-50.74	-203.33	167.12	952.64	35.17	27.62	PASS
4725.00†	4638.37	-687.13	503.00	4529.40	4429.76	-28.07	-210.11	168.18	993.18	36.16	28.00	PASS

C-C Clearance Distance Cutoff: 1000.00 ft

POSITIONAL UNCERTAINTY - Offset Wellbore: LEFFLER 26C-23-L AWB Offset Wellpath: LEFFLER 26C-23-L AWP

Slot Surface Uncertainty @1SD	Horizontal	0.100ft	Vertical	1.000ft
Facility Surface Uncertainty @1SD	Horizontal	8.200ft	Vertical	3.000ft

HOLE & CASING SECTIONS - Offset Wellbore: LEFFLER 26C-23-L AWB Offset Wellpath: LEFFLER 26C-23-L AWP

String/Diameter	Start MD [ft]	End MD [ft]	Interval [ft]	Start TVD [ft]	End TVD [ft]	Start N/S [ft]	Start E/W [ft]	End N/S [ft]	End E/W [ft]
13.5in Open Hole	25.00	1814.00	1789.00	28.00	1795.11	-538.76	-14.42	-473.11	-28.28

WELLPATH COMPOSITION - Offset Wellbore: LEFFLER 26C-23-L AWB Offset Wellpath: LEFFLER 26C-23-L AWP

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
25.00	1752.00	Custom BHI NaviTrak (Standard Rotating+Axial Corr) (Rockies 0.03Gt model)	BHI NAVITRAK W/EM (STD ROTATING, AXIAL, ROCKIES GT)<112-1752>	LEFFLER 26C-23-L AWB
1752.00	17926.00	Custom BHI AutoTrak Curve (IFR1, Short) (Rockies 0.03Gt model)	CUSTOM BHI AUTOTRAK CURVE (IFR1, SHORT) (ROCKIES 0.03GT MODEL) <1841'-17926>	LEFFLER 26C-23-L AWB
17926.00	17950.00	Blind Drilling (std)	Projection to bit	LEFFLER 26C-23-L AWB

OFFSET WELLPATH REFERENCE - Offset Wellbore: LEFFLER 26C-23-L AWB Offset Wellpath: LEFFLER 26C-23-L AWP

MD Reference: PRECISION 562 (25') (RKB)	Offset TVD & local coordinates use Reference Wellpath settings (See WELLPATH DATUM on page 1 of this report)
Ellipse Start MD	25.00ft