




01155444

RED WILLOW PRODUCTION LLC



JAN 26 2004

OIL & GAS COMMISSION

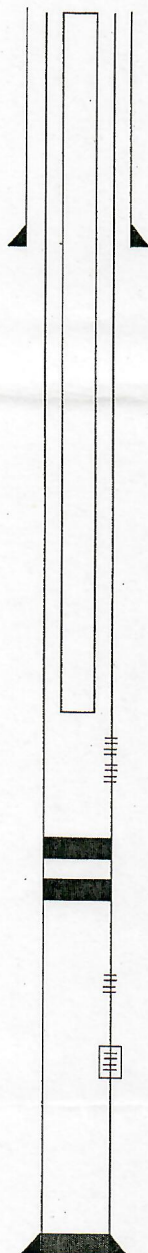

8-5/8" 24# J55 Surface @ 415'.
Cmt'd w/370 sxs

Tbg: 202 Jts 2-3/8" 4.7# J55 EUE Tbg
SN
Notched Collar
EOT =6738'

J-Sand 6924' - 6930'
6932' - 6936'
6954' - 6960'
6964' - 6966'
6969' - 6977'
6980' - 6986'

Frac'd w/489,189' lbs 20/40 tailed w/12,000 lbs AcFrac Plus resin coated.

CIBP @ 7050' w/ 1 sk cement

CIBP @ 7150' w/1 sk cement (leaked)

Dakota 7216'-7236' 4 SPF Csg gun (1/03)
7216'-7234' Tbg Conveyed (4/03) - pulled tbg after perf.
Acidized w/1000 Gals 3% HCl
Frac'd w/34.5K 20/40 & 14K 12/20 Resin

Retainer @ 7250'

Sqze: 7262'-6272' 4 SPF Csg gun (3/03)
Sqz w/50 sx, returns on annulus.
Stuck tbg after sting out retainer.
Washed/mill over fish & retrn

171Jts 4-1/2" 11.6# N80 LTC Casing - 7289'
Float Collar
1 Jt 4-1/2" 11.6# N80 LTC Casing 36'
Float Shoe @ 7337'
Cemented w/300 Sacks. CBL TOC = 5560'

WELL INFORMATION

WELL NAME	DOW #23-28
DATE	1/14/2004
API #	05-123-20593
STATUS	CURRENT
SURFACE LOCATION	T5N-R63W SECTION 28 1980' FSL 1800' FWL
BOTTOM-HOLE LOCATION	T5N-R63W SECTION 28 1980' FSL 1800' FWL
COUNTY, STATE	WELD COUNTY, COLORADO
GROUND ELEVATION	4538'
KB-GR MEASUREMENT	10'
COMMENTS	