


Ground Level

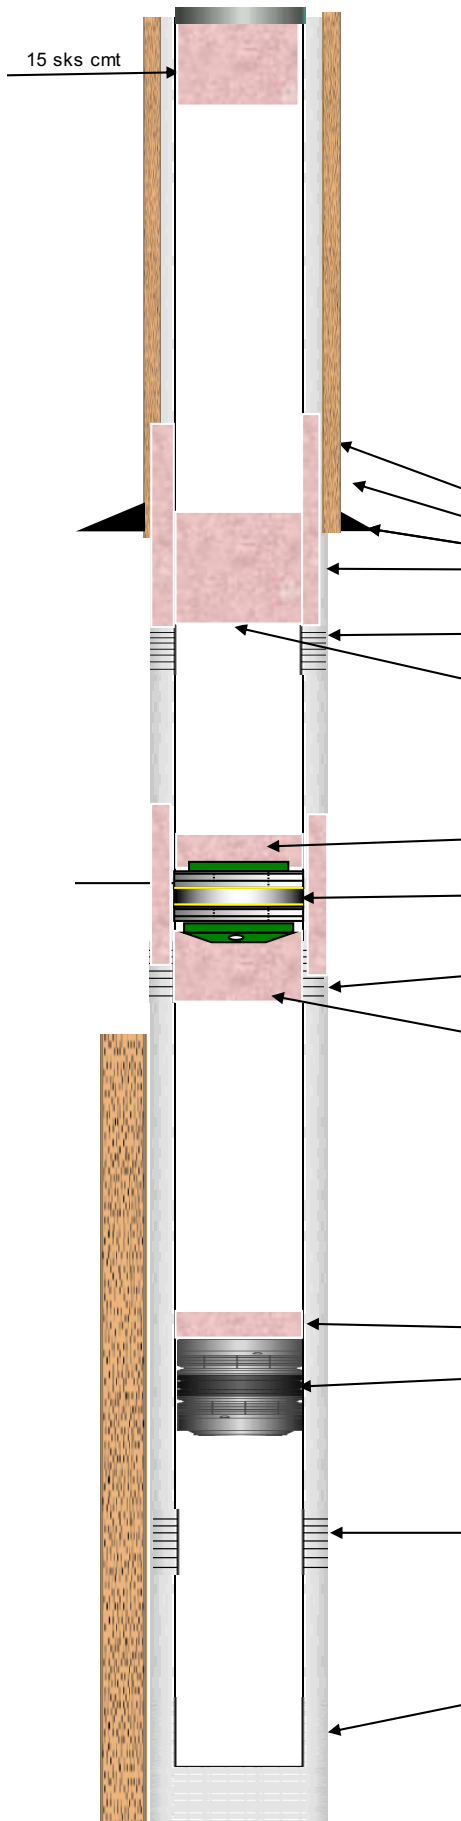

COMPANY					DATE	
Schneider Energy Services, Inc					6/8/21	
LEASE						
Reggie 1 API# 05-087-05905						
Surface Casing	Weight	Grade	Thread	Depth		
8-5/8"	24#	J-55	LT&C	142'		
Prod Casing	Weight	Grade	Thread	Depth		
5-1/2"	15.5#	J-55	LT&C	5628'		
Tubing String	Size	Weight	Grade	Thread	Depth	
	Second String	Size	Weight	Grade	Thread	Depth
Prepared for:			Perforations:			
			D-Sand 5518' to 5520'			
ITEM No#	Length	Description	ID	OD	Depth	
1		150 sks of surface cement from 142' - 0'				
2		12-1/4" surface hole	12.25			
3		8-5/8" Surface Casing @ 142'	7.972	8.625	142.00	
4		75 Sks of Cement Squeezed				
5		Squeeze holes @ 200'			200.00	
6		50 sacks Squeeze (Same as #4)				
7		5 sacks of cement @ 4600'			4600.00	
8		CICR @ 4600'			4600.00	
9		Squeeze holes @ 4700'			4700.00	
10		50 sack squeeze.				
11		4 sacks of cement on top of CIBP				
12		CIBP Set @ 5480'			5480.00	
13		D Sand Perfs 5518' to 5520'				
14		5-1/2" Casing landed @ 5628'	4.825	5.5	5628.00	
PREPARED BY			PHONE:			
Jeff Schneider			970-381-9588			
OFFICE		PHONE		INVOICE #		
Fort Morgan, CO		970-867-9437				