


Date: 6/2/2010  
Preparer: REP  
Lease 6658

Wellname: REED 1-32  
Field: Channing  
County: Prowers State: CO  
aka: none  
API: 05-099-06280

QTR: NE SW NE  
Sec: 32  
Twp: 21S  
Rge: 46W  
1382 FEL & 1763 FNL

KB: 3751  
GL: 3742  
Diff: 9

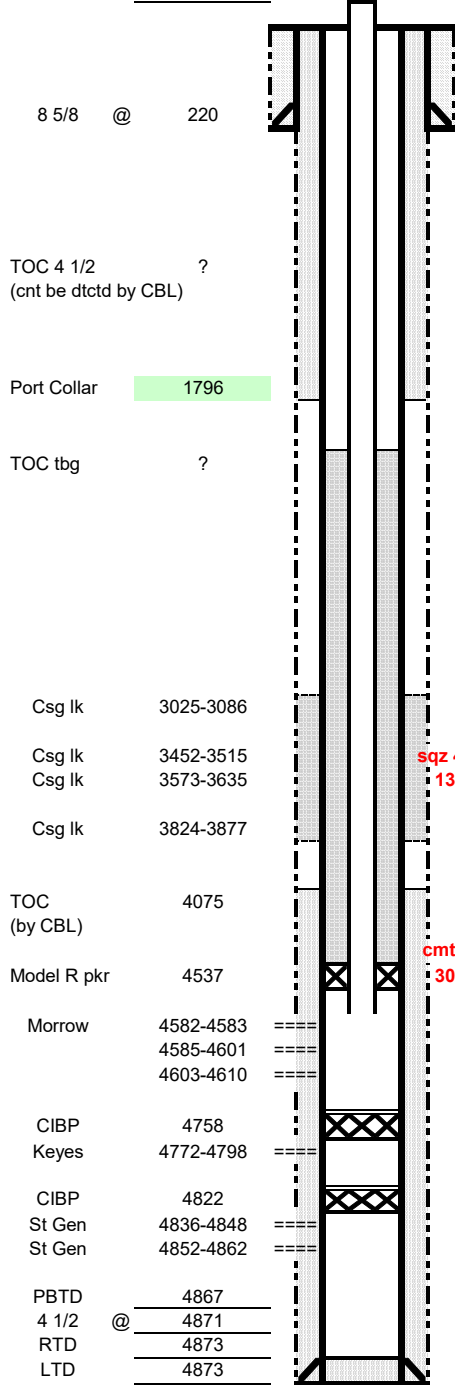

#### Casing Information

Size	Weight	Grade	Depth	Cement	Date Run	Comment
8 5/8	24	?	220	140	1/9/88	cmn
4 1/2	10.5	J-55	4871	140	1/21/88	50/50 poz
Port Collar			1796	300	1/26/88	cmt to surf
2 3/8	?	?	4530	300	9/22/04	lost circ, no cmt to surf

#### DST'S

#1 - 3943-3971 (Marmaton)	no blw, 20' mud, no show	85-159 #
#2 - 4579-4616 (Morrow)	GTS 3', 2258 mcf, 150' SGCWM	1023-1015 #

#### Producing Intervals/Perforations

Formation	Top	Btm	SPF	# of holes	Date	Status
St Genevieve	4852	4862	4	40	1/28/1988	plugged back w/ CIBP
	4836	4848	4	48	1/28/1988	plugged back w/ CIBP
Keyes	4772	4798	4	104	2/5/1988	plugged back w/ CIBP
Morrow	4603	4610	4	28	2/9/1988	open
	4585	4601	4	64	2/9/1988	open
	4582	4583	4	4	2/9/1988	open

#### Well History

1/9/88	Cmt surf csg w/ 140 sks cmn, 2% cc.
1/21/88	Cmt prod csg w/ 140 sks 50/50 poz w/ gel, CFR-2, Gilsonite, Flocele.
1/26/88	Cmt port collar) w/ 300 sks Howco Lite. Good cmt rtns to surf.

1/28/88	Perf St. Genevieve 4852-62 & 4836-48 w/ 4 spf. Tested all water
	Set CIBP @ 4822 w/ 1/2 sx cmt.

2/5/88	Perf Keyes 4772-98 undr pkr w/ 4 spf. Flwd to pit briefly, swb ~1.75 bpw
	Set CIBP @ 4758 w/ 1/2 sxs cmt.

2/9/88	Perf Morrow 4582-83, 4585-4601, & 4603-10
	w/ 4 spf. Flow thru separator ~580 mcf/d, dry. Cndct 4-pt tst. SI for pipeline, 920 psig tbg.

3/28/88 or 89?	POL 1050 mcf/d, 720 psig tbg.
----------------	-------------------------------

	<b>Remediate Csg Leaks &amp; Frac Morrow</b>
2/21-3/12/92	Found csg lks 3025-3086, 3452-3515, 3573-3635, 3824-3877;
	Sqzd csg lks w/ 75 sxs Class A cmt. Drilled out, didn't hold. Resqzd w/ 60 sx class A
	Fracd Morrow (4582-4610, OA) undr pkr w/ 4000 gals prepae, 160 Mgals 75% Q CO2
	foam & 207 sks 20-40 snd @ 7.3 bpm, 5008 psig max. Strtd flowing back after 4 hrs,
	no snd. POL 2-days ltr - 740 mcf/d, 465 psig tbg.

10/28/03	<b>Refracd Morrow (4582-4610, OA) undr pkr w/ 1000 gals 7.5 % acid, 28 Mgals 60% Q N2</b>
	<b>foam &amp; 20 M#s 20-40 snd @ 9 bpm avg, 2200 psig avg.</b> Strtd flowing back after 4.5 hrs,
	no snd. POL 2-days ltr - ~69 mcf/d, 1.7 bw. Btm pkr @ 4517.

9/20-10/31/04	<b>Cmt 2-3/8" Tbg Lnr</b>
	Pkr set 4537, tail pipe @ 4571.
	Cmt 2-3/8" tbg in place w/ 300 sxs A-Con containing 2% cacdz & fric rdr.