


Well Name: McCoy 23-33

API No.:	05-123-35231
Operator:	Captiva Energy Partners, LLC
Location:	NWSW Section 33-T4N-R68W
County:	Weld
State:	Colorado
Field:	Wattenberg
Elev:	5,055 GR, 5,067 KB
Footages:	SHL: 1645' FSL & 219' FWL
	BHL: 2006' FSL & 1997' FWL

Spud Date:	04/02/12
TD Date:	04/08/12
Completion Date:	05/21/12
Measured TD:	7,905'
TVD:	7,537'
Measured PB depth:	7,822'
Measured TV PB depth:	7,454'

<u>Log Tops</u>	<u>MD</u>
Hygiene	3,845'
Sussex	4,477'
Shannon	4,928'
Niobrara	7,490'
Fort Hays	7,714'
Codell	7,734'
Greenhorn	7,818'

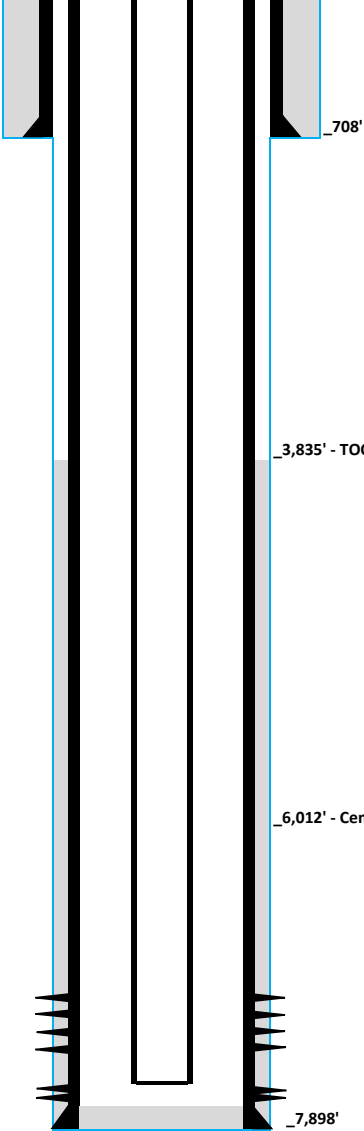

Surface Hole
12-1/4"

Surface Casing & Cement
8-5/8", 24#, J-55, LTC @708 ft, 500 sxs neat cement, 15.0 ppg, yield 1.18
TOC: Surface

Main Hole
7-7/8" to TD

Production Casing & Cement
4-1/2", 11.6#, N-80 LTC @7,898 ft, cemented w/600 sxs
Lead cement: 300 sxs, Class G 50/50 poz, 13.5 ppg, yield 1.71
Tail cement: 300 sxs, Premium Light Cement, 12.5 ppg, yield 2.00
TOC: 3,835' (from CBL)

Niobrara Completion - 5/21/12
Perf'd from 7,512-14', 7,523-26', 7,598-7,603', 7,648-51', 7,670-73', 7,680-84', 60 holes, 3 SPF
Frac'd with 198,500 lbs 30/50 white and 4,000 lbs 20/40 SLC sand, 60 BPM

Codell Completion - 5/21/12
Perf'd from 7,732-52', 60 holes, 3 SPF
Frac'd with 152,400 lbs 30/50 white and 4,000 lbs 20/40 SLC sand, 60 BPM

Production Tubing
2-3/8" tubing, set @ 7,714'
w/o packer