


Well Name: McCoy 2-6-33

API No.: 05-123-35229  
Operator: Captiva Energy Partners, LLC  
Location: NWSW Section 33-T4N-R68W  
County: Weld  
State: Colorado  
Field: Wattenberg  
Elev: 5,054 GR, 5,066 KB  
Footages: SHL: 1629' FSL & 219' FWL  
BHL: 1322' FSL & 1386' FWL

Spud Date: 04/09/12  
TD Date: 04/14/12  
Completion Date: 05/24/12  
  
Measured TD: 7,764'  
TVD: 7,563'  
Measured PB depth: 7,716'  
Measured TV PB depth: 7,515'

Log Tops	MD
Hygiene	3,729'
Sussex	4,355'
Shannon	4,783'
Niobrara	7,271'
Fort Hays	7,573'
Codell	7,592'
Greenhorn	7,671'

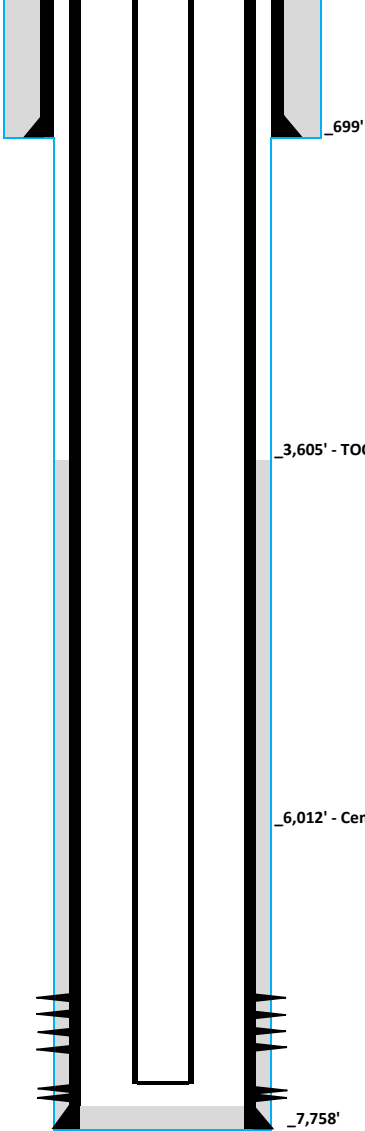

Surface Hole  
12-1/4"

Surface Casing & Cement  
8-5/8", 24#, J-55, LTC @699 ft, 490 sxs neat cement,  
15.2 ppg, yield 1.18  
TOC: Surface

Main Hole  
7-7/8" to TD

Production Casing & Cement  
4-1/2", 11.6#, N-80 LTC @7,758 ft, cemented w/600 sxs  
Lead cement: 300 sxs, Class G 50/50 poz, 13.5 ppg, yield 1.71  
Tail cement: 300 sxs, Premium Light Cement, 12.5 ppg, yield 2.00  
TOC: 3,605' (from CBL)

Niobrara Completion - 5/24/12  
Perf'd from 7,297-99', 7,306-09', 7,382-87', 7,433-36',  
7,457-60', 7,467-71', 60 holes, 3 SPF  
Frac'd with 200,380 lbs 30/50 white and 4,000 lbs 20/40 SLC sand, 62 BPM

Codell Completion - 5/24/12  
Perf'd from 7,594-7,614', 60 holes, 3 SPF  
Frac'd with 150,740 lbs 50/70 white and 4,000 lbs 20/40 SLC sand, 63 BPM

Production Tubing  
2-3/8" tubing, set @ 7,575'  
w/o packer