

## Well

Operator  
Location  
County  
State  
Field  
Footages  
At Surface  
Elevations

## WHEELER 32-1

EnCana Oil & Gas (USA) Inc.  
SW NE Section 1-T1N-R69W, 6<sup>th</sup> P.M.  
Boulder  
Colorado  
Wattenberg

1970' FNL & 2206' FEL  
4979' KB  
4963' GR

API 05-013-06507-00  
Spud Date 02-21-2005  
TD Date 02-28-2005


## Log Tops

Sussex	4273.9'
Sussex Mkr.	4554.9'
Shannon	4839.7'
Sharon Spgs.	7207.5'
Niobrara	7259.4'
Codell	7591.8'
J Sand	8022.9'
Log TD	8190.0'

## Production Tubing

2-3/8" tubing, set @ 8030'

8189' — Driller's  
TD

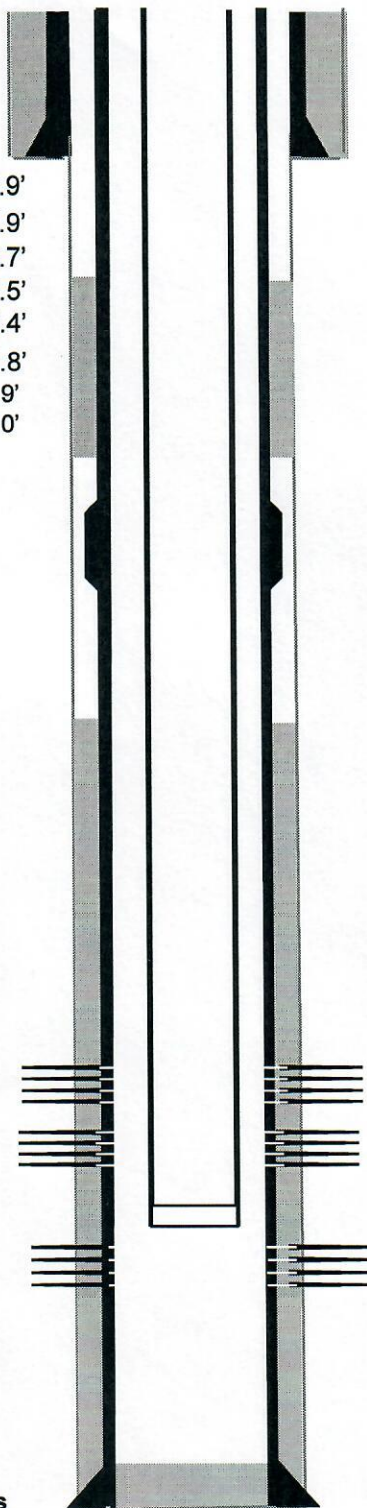

01624393

RECEIVED

APR 24 2006

COGCC

## Surface Casing and Cement

8 5/8", 24#, landed @ 904', cemented with 388 sxs

## Main Hole

7-7/8" to TD



## Production Casing and Cement

4-1/2", 11.6#, landed @ 8186', cemented with 300 sxs

## DV Tool

Set @ 5210', cemented above DV tool with 300 sxs

Perf'd Niobrara from 7262' - 7272', 7355' - 7385' @ 4 spf  
Frac'd Niobrara with 181,692 gal frac fluid and 200,851# sand  
on 11-29-05

## CBP

Set @ 7485' on 11-24-05  
Drilled out on 03-02-06

Perf'd Codell from 7593' - 7613' @ 4 spf  
Frac'd Codell with 111,426 gal frac fluid and 196,629# sand  
on 03-13-05

J-Sand Perf'd from 8040' - 8060' @ 2 spf  
Frac'd J Sand with 207,862 gal frac fluid and 300,700# sand  
on 03-08-05