| | | | | | |
|---|---|---|---|---|---|
| **API:** | **05-123-25256** | **CREATED BY:** | **D. SPELLMAN** | **DATE:** | **June 2nd, 2022** |
| **WELL NAME:** | **USA 2-36** | **ELEVATION:** | **5000** | **QTRQTR:** | **NWNE** |
| **COUNTY:** | **WELD** | **GROUND LEVEL:** | **4986** | **SEC:** | **36** |
| **LATITUDE:** | **40.1878363** | **MD:** | **7535** | **TWN:** | **3N** |
| **LONGITUDE:** | **-104.7230825** | **PBMD:** | **7488** | **RNG:** | **66W** |

**Existing** DATUM: RKB KB=14' **Final**

Hole Size/Depth 12-1/4" / 843'

Deepest water well in 1 mile - Not Found'

340 Sx Cmt

Surface Casing 8-5/8", 24#, J-55 set @ 834'

TOC (from CBL) 2470'

BOC (from CBL) 3620'

TOC (from CBL) 3620'

Sussex NOT productive in 1 mile

Top 4484'

Base '

Shannon Base Absent

Niobrara Top 7200'

Niobrara Perfs 7204' - 7270'

Codell Perfs 7375' - 7390'

479 Sx Cmt

Production Casing 4-1/2", 11.6#, I-80 set @ 7522'

Hole Size/Depth 7-7/8" / 7535'

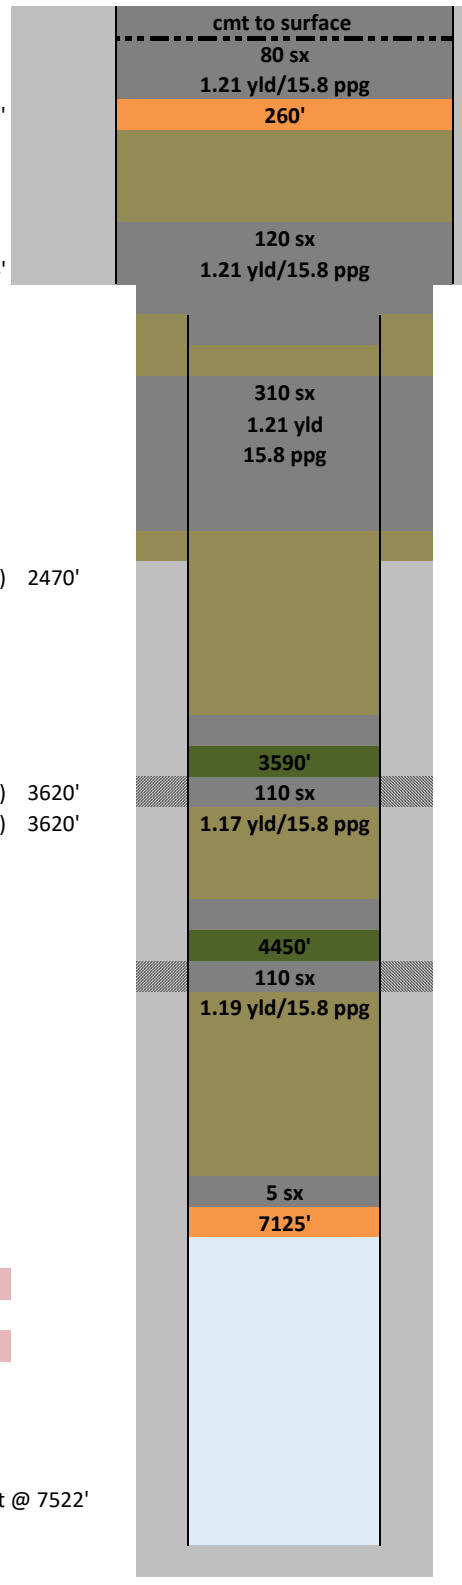


260' BOC OH

615' Tged TOC

935' Cut csg

985' BOC

1350' Tged TOC in csg

1350' TOC behind csg

2400' Perfs/BOC

3530' Tged TOC in csg

3620' Perfs/BOC

4390' ETOC in csg

4504' Perfs/BOC

New Cement
Existing Cement
New CICR
Existing CICR
New CIBP
Existing CIBP
Treated Water
Brine
Mud
Sand Plug