



# Proposed P&A WBD


Well Name: SPIKE STATE CC30-18

Land, Original Hole, 12/19/2022 7:32:50 AM

Vertical schematic (proposed)

MD (ftKB)

13.1  
26.9  
521.0  
564.0  
565.0  
765.1  
1,899.9  
2,000.0  
2,002.0  
2,100.1  
2,120.1  
6,450.1  
6,476.0  
6,477.7  
6,495.1  
6,525.9  
6,542.0  
6,589.9  
6,606.0  
6,750.0  
6,771.3  
6,794.0  
6,807.1  
7,173.9  
7,196.2  
7,200.1  
7,211.9  
7,250.0  
7,254.9  
7,265.1  
7,270.0  
7,274.9  
7,282.2  
7,290.0  
7,299.9  
7,328.7  
7,338.9  
7,339.6  
7,340.6  
7,383.5  
7,384.8  
9,337.9

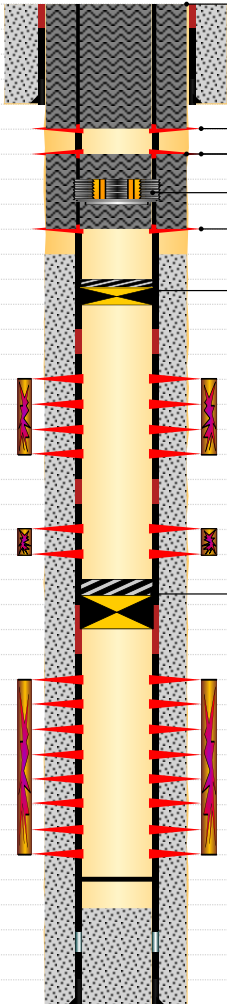

Top Plug: 13-765; 12/12/2022; 245sk

Perforated: 765-765; 12/12/2022

Courtesy Plug: 1900-2100; 12/12/2022; 80sk total, 70sk through and 10sk on top

Perforated: 1900-1900; 12/12/2022

Cement Retainer: 2000-2002; 3.99; 12/12/2022

Perforated: 2100-2100; 12/12/2022

Cast Iron Bridge Plug w/ 2 SX Cement; 6450-6476; 3.99; 12/12/2022

Cast Iron Bridge Plug w/ 2 SX Cement; 7174-7200; 3.99; 12/12/2022