


OIL AND GAS CONSERVATION COMMISSION  
OF THE STATE OF COLORADO

## PLUGGING RECORD

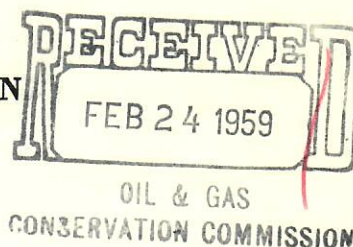

## INSTRUCTIONS

Within thirty (30) days after the plugging of any well, the owner or operator thereof shall file this form in duplicate for wells on Patented or Federal lands, and in triplicate for wells on State lands, give a detailed account of the manner in which the abandonment or plugging work was carried out, including the nature and quantities of materials used in plugging and the location and extent (by depths) of the plugs of different materials; records of the amount, size and location (by depths) of casings and junk left in the well; and a detailed statement of the volume and weight of mud fluid used.

Operator Huron Drilling Company, Inc. Field No name Wilcat  
Lease Name Jolly Well No. 1 County Washington  
Location C SE NW Section 15 Township 3S Range 55W Meridian 6th PM  
(Quarter Quarter)  
1988 feet from N Section line and 1976 feet from W Section Line  
N or S E or W

TOTAL DEPTH 4962' DATE OF PLUGGING February 15, 1959

## DETAILS OF WORK

Set bottom plug at 4800'w/5 sx cement (2/10/59). Filled hole with heavy mud to base of surface casing. Set bottom of surface plug w/10 sacks cement; set top of surface plug w/5 sx cement. Cut off surface pipe below plow depth and welded steel plate across top.

1704

AJJ	
DVR	
WRS	
HHM	
JAM	<input checked="" type="checkbox"/>
FJP	<input checked="" type="checkbox"/>
JJD	<input checked="" type="checkbox"/>
File	

I/we hereby swear (or affirm) that the statements herein made are a full and correct report:

Approved:

Date

Director

Company Huron Drilling Co., Inc. Date February 19, 1959Address 506 Patterson Bldg. Phone No. AC 2-7207By David L. Shogren Title Vice President  
(Signature)

FEB 24 1959