




OIL AND GAS CONSERVATION COMMISSION
OF THE STATE OF COLORADO

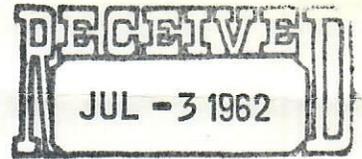

SUNDRY NOTICES AND REPORTS ON WELLS CONSERVATION COMMISSION

INSTRUCTIONS

Notice must be given to the Director, and approval obtained in advance of the time when the owner or operator expects to recomplate or abandon a well or to change plans. Within thirty (30) days after recompletion, change of plans, or remedial work, a detailed report of the work done and the results obtained shall be submitted on this form in duplicate for wells on Patented and Federal lands, and in triplicate for wells on State lands. In work that affects only rods, pumps or tubing or other routine work such as, but not limited to, cleaning out to previous total depth, no report is necessary.

Notice of Intention to Recomplate	<input type="checkbox"/>	Report of Remedial Work	<input type="checkbox"/>
Notice of Intention to Change Plans	<input type="checkbox"/>	Report of Recompletion	<input type="checkbox"/>
2 Notice of Intention to Abandon Well	<input checked="" type="checkbox"/>	Other	<input type="checkbox"/>

(Check appropriate space)

LEASE NAME State of Colorado "B" WELL NO. 2
 FIELD Big Beaver WILDCAT _____ COUNTY Washington
 LOCATION C NE NW Section 16 Township 3S Range 56W Meridian 62
 (Quarter Quarter)
667 feet from N Section Line and 2000 feet from W Section Line
 N or S E or W

(DETAILS OF WORK)

Pan American Petroleum Corporation spudded this well on 10-24-54 and drilled to 5250' TD. 204' of 8-5/8" 22.7# surface casing was set at 214' RDB and cemented with 150 sacks of cement. 5156' of 5 1/2" 14.0# J-55 casing was set at 5120' RDB and cemented with 175 sacks plus 4% gel. After numerous perforating and cement squeeze jobs, a Baker CIBP was set at 5014' and the casing notched at 4992'. The perforated interval 5021-31' is the only open zone below the CIBP. The notch at 4992' is the only open zone above the CIBP.

The well will be plugged in the following manner:
 14 sack cement plug 5014' - 4900'
 Maximum recoverable 5 1/2" 14.0# J-55 casing will be pulled
 20 sack cement plug 241' - 181'
 10 sack cement plug at surface
 Clean and level location.

AJJ	
DVR	
WRS	
HHM	
JAM	
FJP	<input checked="" type="checkbox"/>
JJD	<input checked="" type="checkbox"/>
FILE	

I/We hereby swear (or affirm) that the statements herein made are a full and correct report.

APPROVED:
 JUL - 5 1962
 Date _____
 Director A. J. Garrison

Company Pan American Petroleum Corp. Date 7-2-62
 Address P. O. Box 1031, Kimball, Nebr Phone No. BE 5-4603
 By L. R. Telford Title Area Foreman
 (Signature)