




COLORADO OIL AND GAS CONSERVATION COMMISSION  
SUNDRY NOTICES AND REPORTS OF WELLS

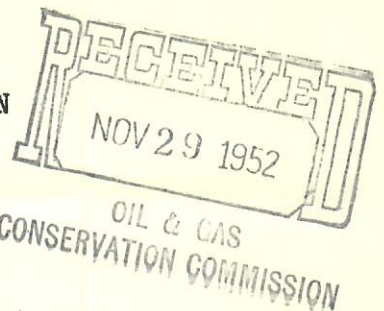

(Indicate nature of data by checking below)

305-8

Notice of intention to drill \_\_\_\_\_  
 Notice of intention to change plans \_\_\_\_\_  
 Notice of date for test of water shut-off \_\_\_\_\_  
 Report on result of test of water shut-off \_\_\_\_\_  
 Notice of intention to re-drill or repair well \_\_\_\_\_  
 Notice of intention to clean out well \_\_\_\_\_  
 Statement of shooting \_\_\_\_\_  
 Statement of perforating \_\_\_\_\_  
 Notice to pull or otherwise alter casing \_\_\_\_\_  
 Notice of intention to abandon well \_\_\_\_\_  
 Report of work done on well since previous report X

Following is a (~~notice of intention to do work~~) November 24, 19 52  
 (report of work done) (~~land~~)  
 (patented) described as follows:

Colorado	Logan	Walker
State	County	Field
<u>6</u>	<u>J. F. Kirk</u>	<u>SE/4 17</u>
(Well No.)	(Lease)	(Sec. and $\frac{1}{4}$ Sec.)
		<u>9N</u>
		(Twp.)
		<u>53W</u>
		(Range)
		(Meridian)

The well is located 330 ft. (N) of N Line and 994 ft. (E) of E Line of SE/4 Section 17-9N-53W  
 (S) (W)

The elevation above sea level is 4109 ft.

Details of Plan of Work: (State names of and expected depths to objective sands: Show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work.)

9-24-52 Spudded.  
 9-25-52 Ran and cemented 8 5/8" casing at 599 feet with 300 sacks.  
 10-2-52 Ran Schlumberger.  
 10-3-52 Cemented 4 1/2" casing at 4906' with 200 sacks.  
 10-10-52 Moved in cable tool.  
 10-13-52 Drilled cement to 4814'.  
 10-14-52 Drilled cement to 4903'.  
 10-15-52 Perforated 4899-4901' with 8, 10 gram jet shots.  
 10-17-52 Broke formation with oil with 4900#. Maximum pressure, minimum pressure 900#.  
 10-20-52 Loaded hole with 45 barrels of oil, reperforated 4898-4901' with 12-10 gram jets.  
 10-29-52 Ran rods.  
 11-5-52 Pulling rods and tubing to perforate.  
 11-7-52 Perforated 4895-99' with 16-10 gram jets.  
 11-10-52 Ran rods and tubing.  
 11-24-52 Pumped 49 barrels of oil and 5 barrels water in 24 hours. COMPLETE  
 Schlumberger Tops: Niobrara-3966', Timpas-4248', Bentonite-4652', 'Muddy'-4740', Dakota-4841'.  
 Approved: NOV 29 1952 Company Shell Oil Company

J. J. Zarichak  
 Director

Address Denham Bldg., Denver, Colorado

By J. J. Zarichak

Title Division Production Manager

Submit reports of proposed work, for approval, on this form in Duplicate for patented lands and in Triplicate for school and state lands.