




OIL AND GAS CONSERVATION COMMISSION OF THE STATE OF COLORADO

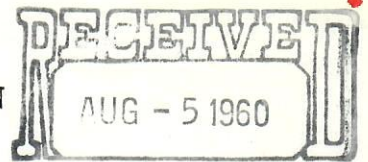

OIL & GAS CONSERVATION COMMISSION

PLUGGING RECORD

INSTRUCTIONS

Within thirty (30) days after the plugging of any well, the owner or operator thereof shall file this form in duplicate for wells on Patented or Federal lands, and in triplicate for wells on State lands, give a detailed account of the manner in which the abandonment or plugging work was carried out, including the nature and quantities of materials used in plugging and the location and extent (by depths) of the plugs of different materials; records of the amount, size and location (by depths) of casings and junk left in the well; and a detailed statement of the volume and weight of mud fluid used.

Operator Pubco Petroleum Corporation Field Key Wildcat
Lease Name State-Hoxie Well No. 1 County Logan
Location C NW/4 SE/4 Section 25 Township 8 N. Range 54 W. Meridian
1910 feet from South Section line and 1980 feet from East Section Line
N or S E or W

Verbal 7/20/60

TOTAL DEPTH 5107 DATE OF PLUGGING July 28, 1960

DETAILS OF WORK

Filled casing from 5107 to 4982 with 125 gallons of sand, and placed 5 sks of cement on top to 4952. Shot casing at 4212 and pulled from well. Hole filled completely with drilling mud to below surface casing at 210'. Placed 10 sks below surface into surface and rock bridge to within 15' of surface. Set 5 sks cement on top. Completed 7-28-60 by Donnelly Casing pullers, Sterling, Colorado.

Table with 2 columns and 7 rows: AJJ, DVR, WRS, HHM, JAM, FJP, JJD, FILE. JJD has a checkmark.

p+a oil well

I/we hereby swear (or affirm) that the statements herein made are a full and correct report :

Approved: Date Aug 5 1960 Company Pubco Petroleum Corp. Date Aug. 2, 1960
Address Box 363, Rawlins, Wyoming Phone No. EA. 4-2738
Director M. Seelinger (Signature) Title District Engineer